HODGES, MICHAEL

4511 Bimini Dr, Bradenton,
Florida, 34210

GENERAL NOTES

1. DESIGN CRITERIA
FLORIDA BUILDING CODE (FBC), 8TH EDITION (2023/2024).
ASCE 7-22: MINIMUM DESIGN LOADS AND ASSOCIATED CRITERIA FOR BUILDINGS AND OTHER STRUCTURES.
ACI 318-19: BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE.
ASTM STANDARDS AS SPECIFIED HEREIN.
ALUMINUM DESIGN MANUAL 2020 EDITION (AA ADM-2020).
AA ASM 35-30: ALUMINUM STANDARDS AND DATA.
NATIONAL ELECTRICAL CODE (NEC), 2023 EDITION.

2. DESIGN LOADS
WIND SPEED (FBC CHAPTER 16): 140 MPH
ULTIMATE WIND SPEED (VULT) = 138 MPH (PER ASCE 7-22, SECTION 26.5.1).
ALLOWABLE STRESS DESIGN WIND SPEED (VASD) = 107 MPH (VASD = VULT × √0.6).
RISK CATEGORY: I (LOW HAZARD TO HUMAN LIFE).
EXPOSURE CATEGORY: B (URBAN OR SUBURBAN TERRAIN WITH OBSTRUCTIONS).
DESIGN WIND PRESSURES INTERPOLATED FROM ASCE 7-22 AND REFERENCE TABLES FOR VULT = 140 MPH, EXPOSURE CATEGORY B.

WIND LOADS (MWFRS), BASED ON 140 MPH WIND SPEED AND EXPOSURE B:
- HORIZONTAL PRESSURE (WINDWARD): 26 PSF.
- HORIZONTAL PRESSURE (LEEWARD): 21 PSF.
- VERTICAL PRESSURE ON SCREEN SURFACE: 8 PSF.
- VERTICAL PRESSURE ON SOLID SURFACES: 27 PSF.

LOAD REDUCTION FACTORS:
- FOR 20x20x.011" MESH SCREEN: 0.88 (MANUFACTURER DATA, ASCE 7-22 SECTION 30.5).
- FOR ALLOWABLE STRESS DESIGN PRESSURES: 0.6 (ASCE 7-22 SECTION 2.4).

3. CONTRACTOR RESPONSIBILITIES
- ALL WORK SHALL BE PERFORMED BY A LICENSED CONTRACTOR IN ACCORDANCE WITH APPLICABLE CODES, REGULATIONS, AND LOCAL ORDINANCES.
- CONTRACTOR MUST FIELD-VERIFY ALL DIMENSIONS PRIOR TO FABRICATION OR CONSTRUCTION. WRITTEN DIMENSIONS SHALL GOVERN OVER SCALED DRAWINGS.
- ANY DISCREPANCIES, ERRORS, OR OMISSIONS SHALL BE REPORTED TO THE ENGINEER IN WRITING WITHIN 10 DAYS OF PLAN RECEIPT AND PRIOR TO CONSTRUCTION.
- CONTRACTOR IS RESPONSIBLE FOR VERIFYING EXISTING SITE CONDITIONS, INCLUDING STRUCTURE AND FOUNDATION INTEGRITY, PRIOR TO COMMENCEMENT.
- CONTRACTOR SHALL PROVIDE ALL REQUIRED TEMPORARY SHORING, BRACING, AND SAFETY MEASURES DURING CONSTRUCTION.
- CONTRACTOR SHALL PROTECT EXISTING STRUCTURES, UTILITIES, AND LANDSCAPING OUTSIDE THE SCOPE OF THIS PROJECT.
- INSTALLATION PRACTICES MUST COMPLY WITH MANUFACTURER RECOMMENDATIONS, INCLUDING FLASHING AND WATERPROOFING DETAILS.
- CONTRACTOR SHALL COORDINATE SITE ACCESS FOR INSPECTIONS AND MAINTAIN CLEAN AND SAFE WORKING CONDITIONS.
- ALL UNDERGROUND UTILITIES SHALL BE LOCATED AND PROTECTED PRIOR TO EXCAVATION.
- SHOP DRAWINGS AND MATERIAL CERTIFICATIONS SHALL BE PROVIDED UPON REQUEST.
- CONTRACTOR SHALL MAINTAIN RECORDS OF INSPECTIONS AND TESTING.
- FASTENER TORQUE AND EMBEDMENT TESTING RESULTS SHALL BE PROVIDED IF REQUESTED.

4. MATERIALS

FOUNDATION
- ASSUMED SOIL BEARING CAPACITY: 2,000 PSF (VERIFY IN FIELD).
- NOTIFY ENGINEER IF UNSUITABLE SOILS ARE ENCOUNTERED.
- APPLY TERMITE TREATMENT AS REQUIRED BY FBC.
- PLACE CONCRETE OVER VAPOR BARRIER WHERE APPLICABLE.

CONCRETE
- MINIMUM COMPRESSIVE STRENGTH: 3,000 PSI @ 28 DAYS.
- PORTLAND CEMENT: ASTM C150, TYPE I.
- AGGREGATE: 3/4" MAXIMUM, ASTM C33.
- AIR ENTRAINMENT: 4–7%, ASTM C260.
- WATER-REDUCING AGENT: ASTM C494.
- WATER: CLEAN, POTABLE.
- MINIMUM SLAB THICKNESS: 4 INCHES.
- CURE CONCRETE FOR A MINIMUM OF 7 DAYS.

STEEL REINFORCEMENT
- REINFORCING STEEL: ASTM A615, GRADE 60.
- MINIMUM COVER FOR FOOTINGS: 2 INCHES.
- LAP SPLICES: 40 TIMES BAR DIAMETER.
- WELDED WIRE MESH PER ASTM A185.
- FIBERMESH MAY BE SUBSTITUTED IF ASTM AND ACI REQUIREMENTS ARE MET.

ALUMINUM
- STRUCTURAL ALUMINUM ALLOY: 6005-T5 MINIMUM.
- DESIGN PER AA ADM-2020 SPECIFICATIONS.
- MINIMUM WALL THICKNESS FOR EXTRUDED MEMBERS: 0.040 INCHES.
- SELF-MATING BEAMS TO BE STITCHED WITH #12 SMS SCREWS:
  - 6" O.C. AT ENDS.
  - 18" O.C. ALONG SPANS.
- KICK PLATES (FORMED PANELS) MINIMUM THICKNESS: 0.024 INCHES.
- 18X14X0.013" MESH SCREEN IS STANDARD UNLESS OTHERWISE APPROVED.
- ROOF BRACING: 2" X 2" X 0.050" WALL THICKNESS MINIMUM.
- ALL ALUMINUM IN CONTACT WITH STEEL OR PRESSURE-TREATED LUMBER SHALL HAVE DIELECTRIC ISOLATION.
- ALUMINUM ROOF SYSTEMS SHALL BE SELECTED PER MANUFACTURER SPAN TABLES CERTIFIED BY A LICENSED FLORIDA ENGINEER.
- METAL STRUCTURES WITHIN 5 FEET OF POOLS SHALL BE BONDED PER NEC 680.26.

FASTENERS
- ALL FASTENERS SHALL COMPLY WITH ASTM A153 FOR ZINC COATING.
- CONCRETE SCREWS: TAPCON, SIMPSON, HILTI, REDHEAD, OR APPROVED EQUAL.
- LAG BOLTS SHALL HAVE MINIMUM EMBEDMENT OF 8 TIMES BOLT DIAMETER.
- STAINLESS STEEL TYPE 300 (18-8) SHALL BE USED FOR CONNECTIONS TO PRESSURE-TREATED WOOD.
- MINIMUM FASTENER SPACING:
  - SMS: 3/4" CENTER-TO-CENTER, 1/2" EDGE DISTANCE.
  - 1X2 MEMBERS TO MASONRY: 1/4" X 2-3/4" TAPCONS @ 18" O.C.
  - 1X2 MEMBERS TO WOOD: #14 X 2-3/4" WOOD SCREWS @ 18" O.C.
  - 1X2 MEMBERS TO ALUMINUM: #10 X 1-1/2" SMS OR TEK SCREWS @ 18" O.C.
- FOR "OPEN VIEW" OR "PICTURE WINDOW" ASSEMBLIES, REDUCE FASTENER SPACING TO 12" O.C.

5. ELECTRICAL
- METAL STRUCTURES WITHIN 5 FEET OF SWIMMING POOLS MUST BE BONDED IN ACCORDANCE WITH NEC 680.26.
- PROVIDE EQUIPOTENTIAL BONDING FOR ALL CONDUCTIVE ELEMENTS WITHIN POOL AREA.
- ALL ELECTRICAL WORK SHALL COMPLY WITH NEC 2023 EDITION AND LOCAL AMENDMENTS.

6. GENERAL REQUIREMENTS
- DIMENSIONS ARE NOMINAL UNLESS OTHERWISE NOTED.
- DIMENSIONAL TOLERANCES: ±1/8" UNLESS SPECIFIED.
- NOTES APPLY TO THE ENTIRE DRAWING SET UNLESS OTHERWISE INDICATED.
- REPORT ANY CONFLICTS IN DRAWINGS TO THE ENGINEER IMMEDIATELY.
- PROVIDE SHOP DRAWINGS AND MATERIAL CERTIFICATIONS IF REQUESTED.
- ENSURE SITE ACCESS FOR REQUIRED INSPECTIONS.
- FINAL CLEANUP IS REQUIRED PRIOR TO PROJECT CLOSEOUT.

ALUMINUM EXTRUSION DIMENSIONS	
HOLLOW SECTIONS	
2 x 2	2" x 2" x 0.050"
2 x 3	2" x 3" x 0.050"
OPEN-BACK SECTIONS	
1 x 2	1" x 2" x 0.044"
SELF-MATING SECTIONS (SMB)	
2 x 4	2" x 4" x 0.044" x 0.100"
2 x 5CL	2" x 5" x 0.050" x 0.135"
2 x 6	2" x 6" x 0.050" x 0.120"
2 x 7	2" x 7" x 0.057" x 0.120"
2 x 8	2" x 8" x 0.072" x 0.224"
2 x 9	2" x 9" x0.072" x 0.224"
2 x 10	2" x 10" x 0.092" x 0.374"
REC-TUBE - 6005-T5 MINI.	
2 x 8	2" x 8" x 0.125" x 0.125"

Brandon T Campbell
Digitally signed by Brandon T Campbell
DN: CN=Brandon T Campbell, dnQualifier=A01410C0000019754D0E51E000EABCC, O=Unaffiliated, C=US
Date: 2026.05.28 16:32:28-05'00'

BRANDON CAMPBELL
LICENSE
100195
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	5/28/2026

NOTICE:

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 5/28/2026

SHEET: 1

DRAWING TITLE: NOTES

PROJECT NAME: HODGES, MICHAEL

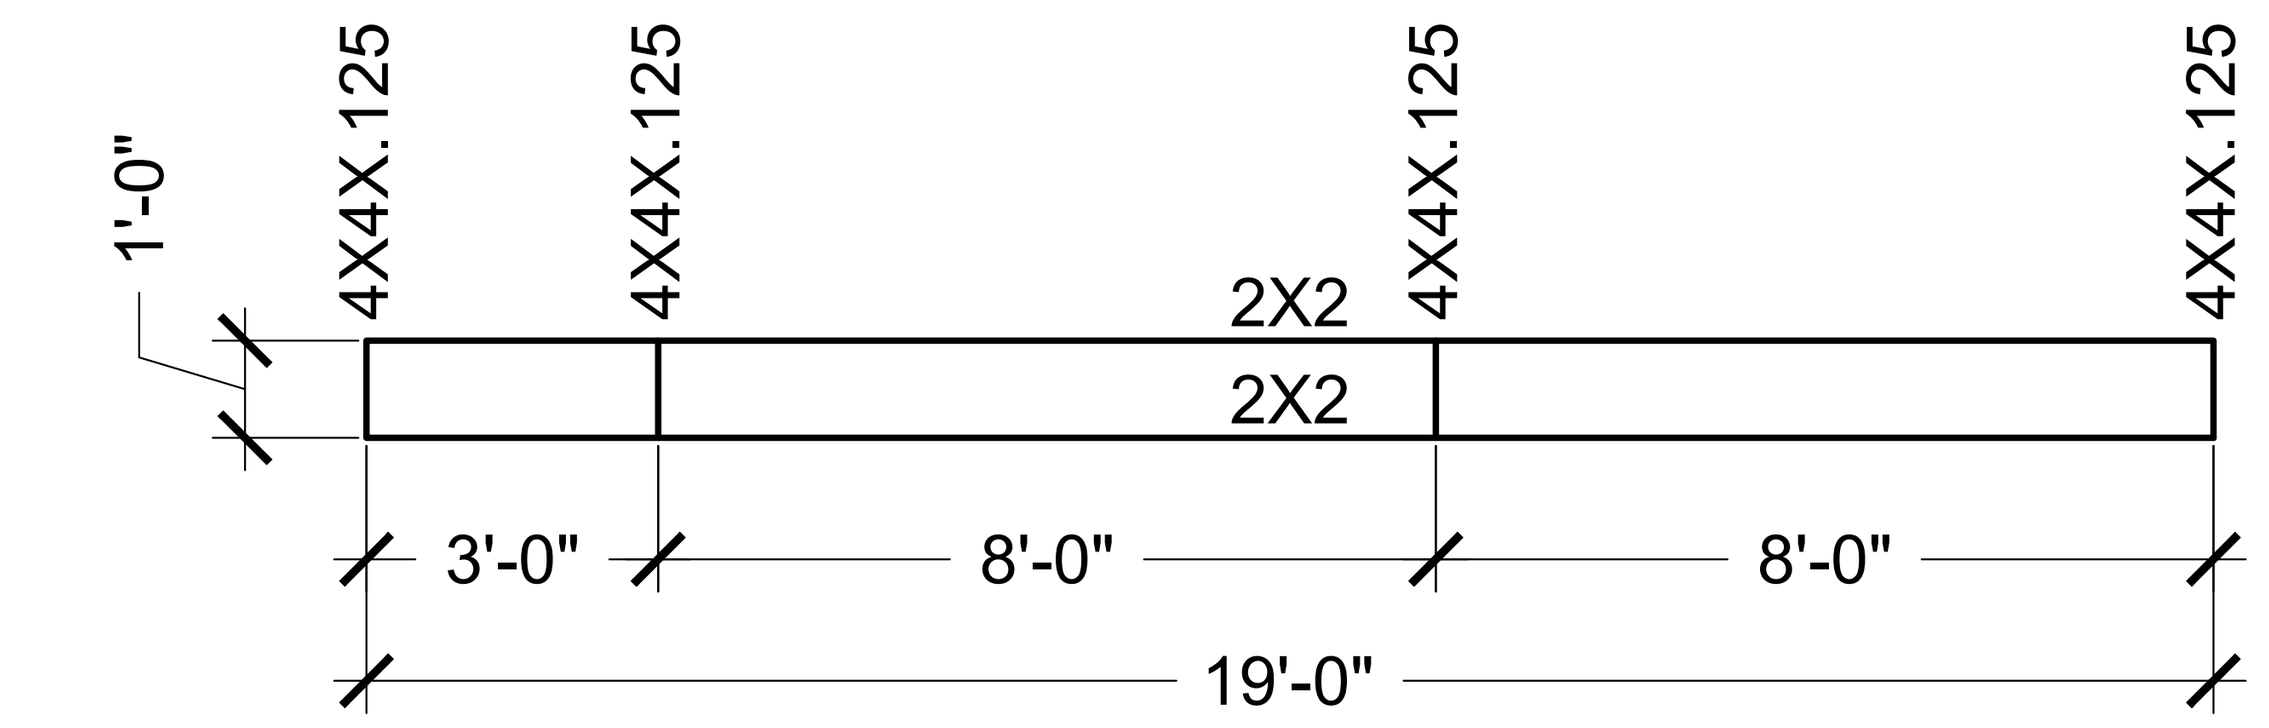

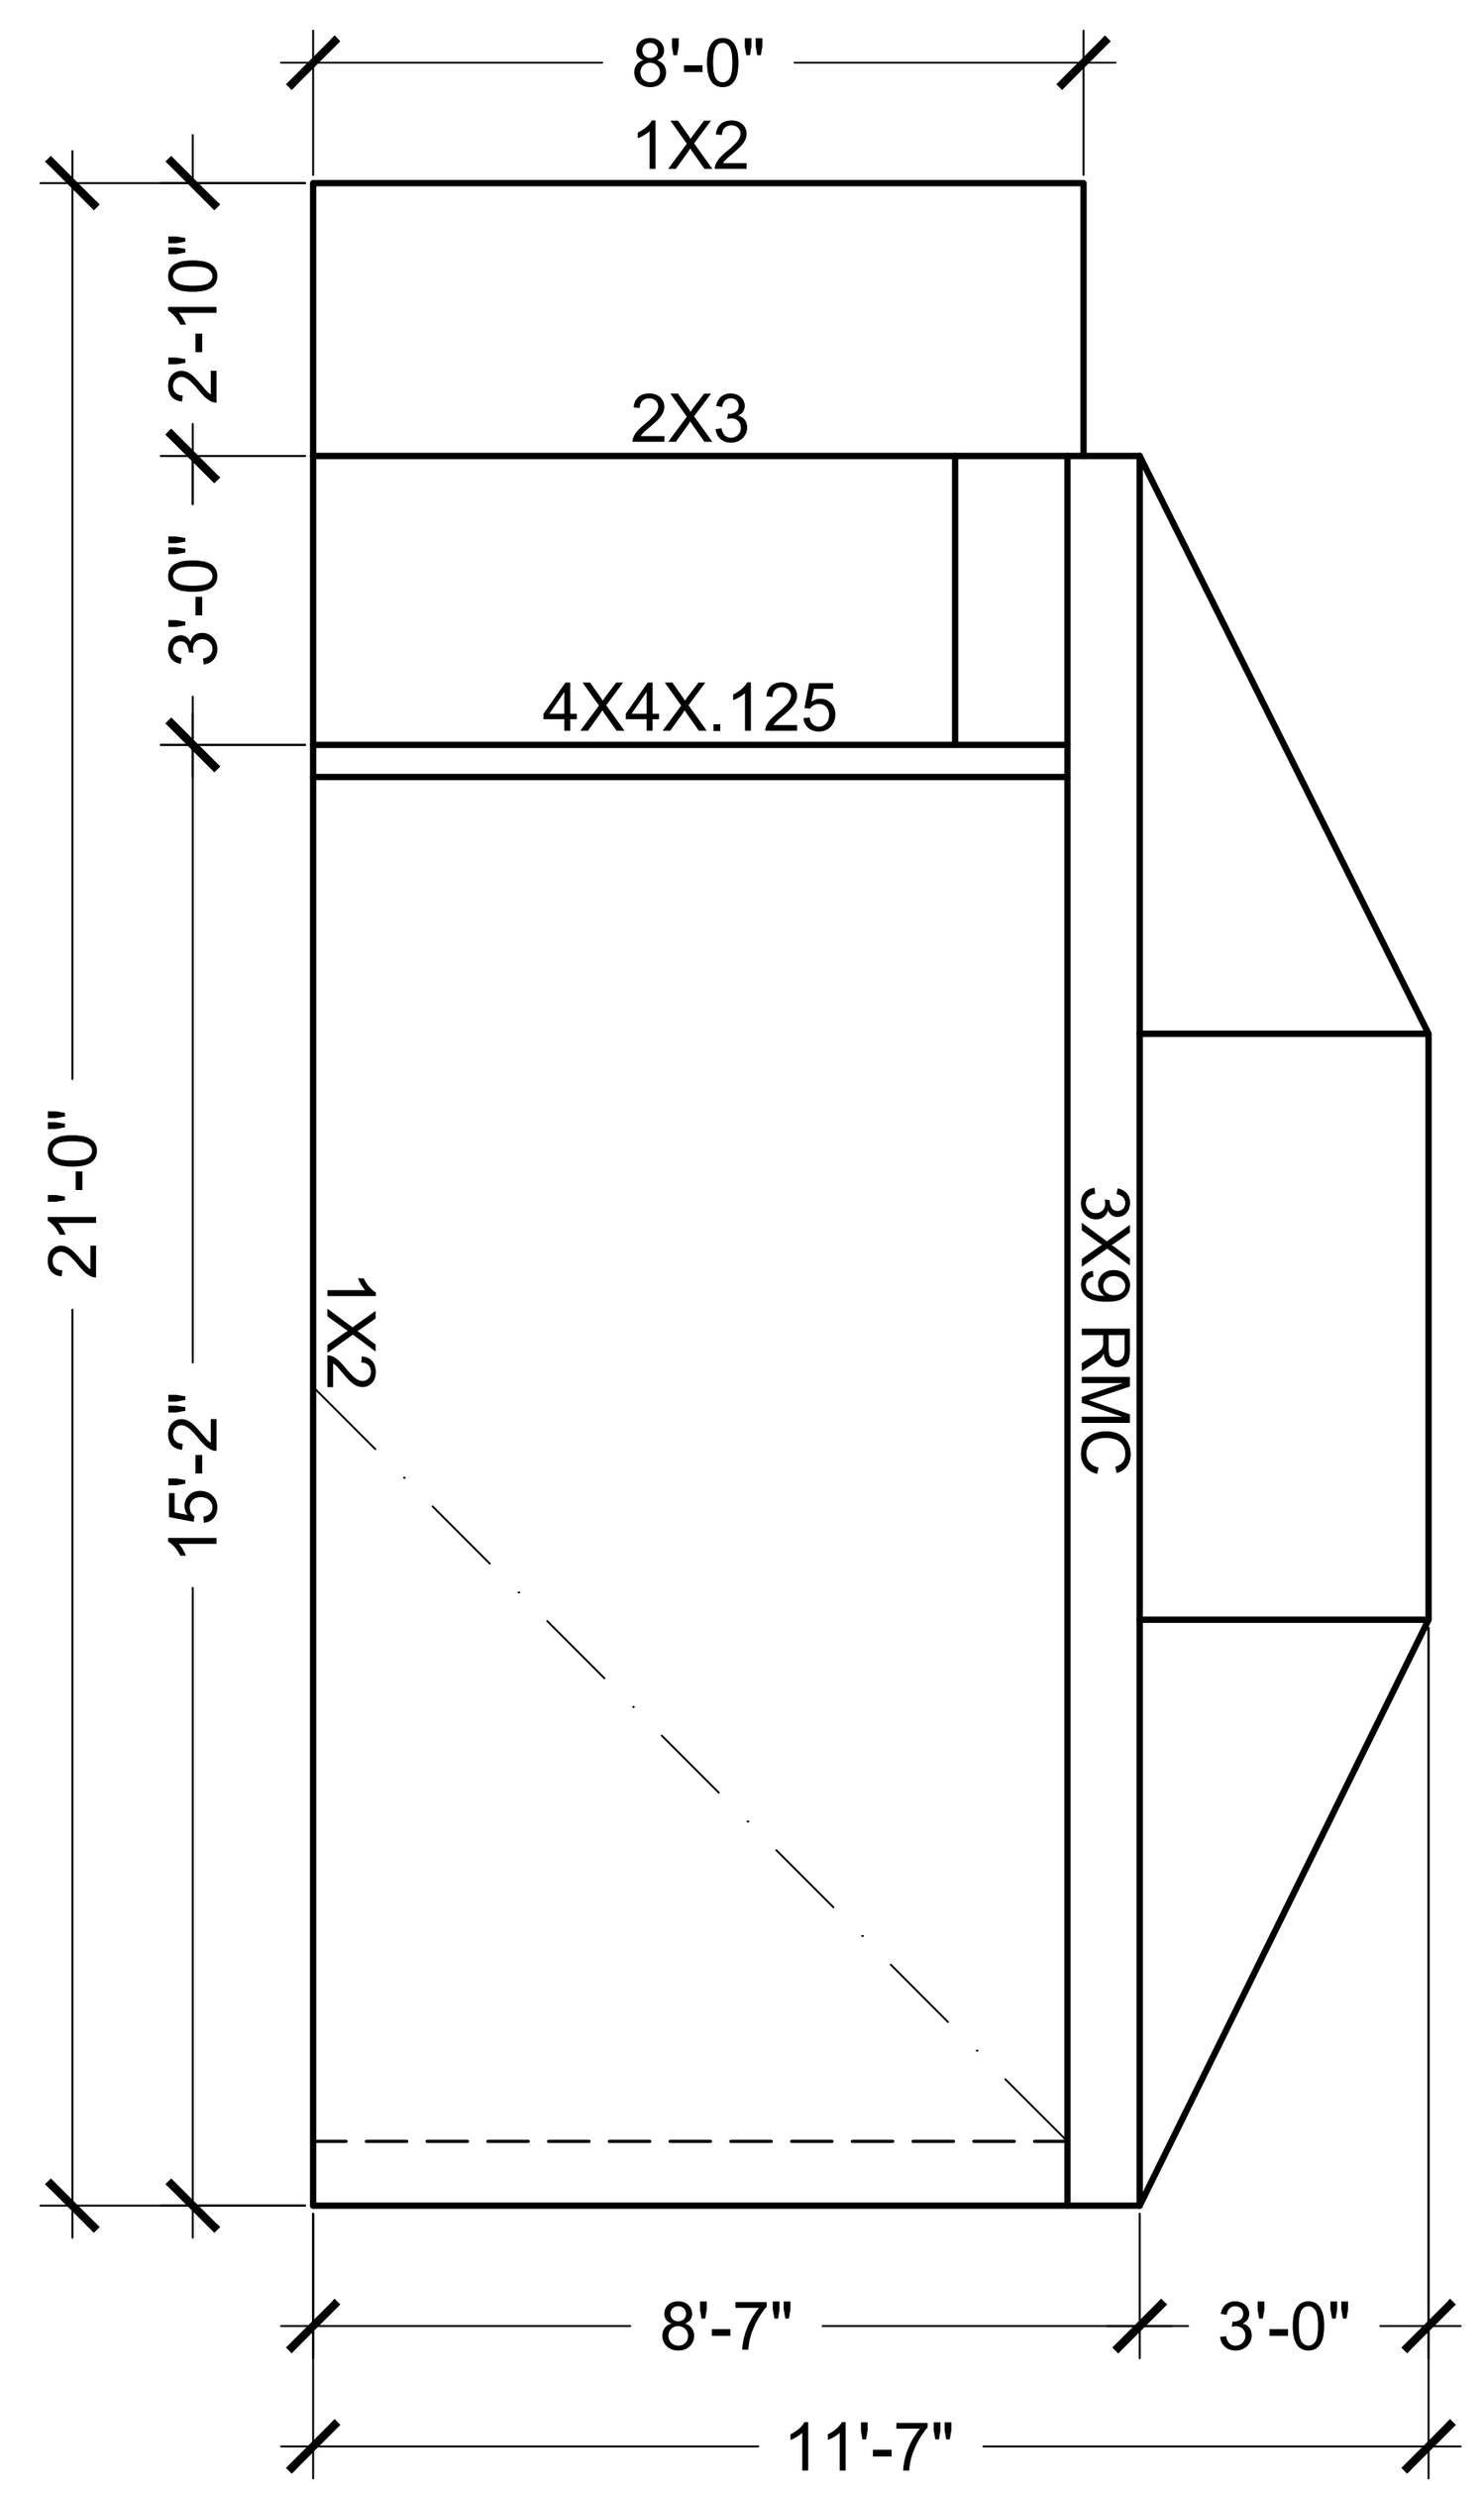

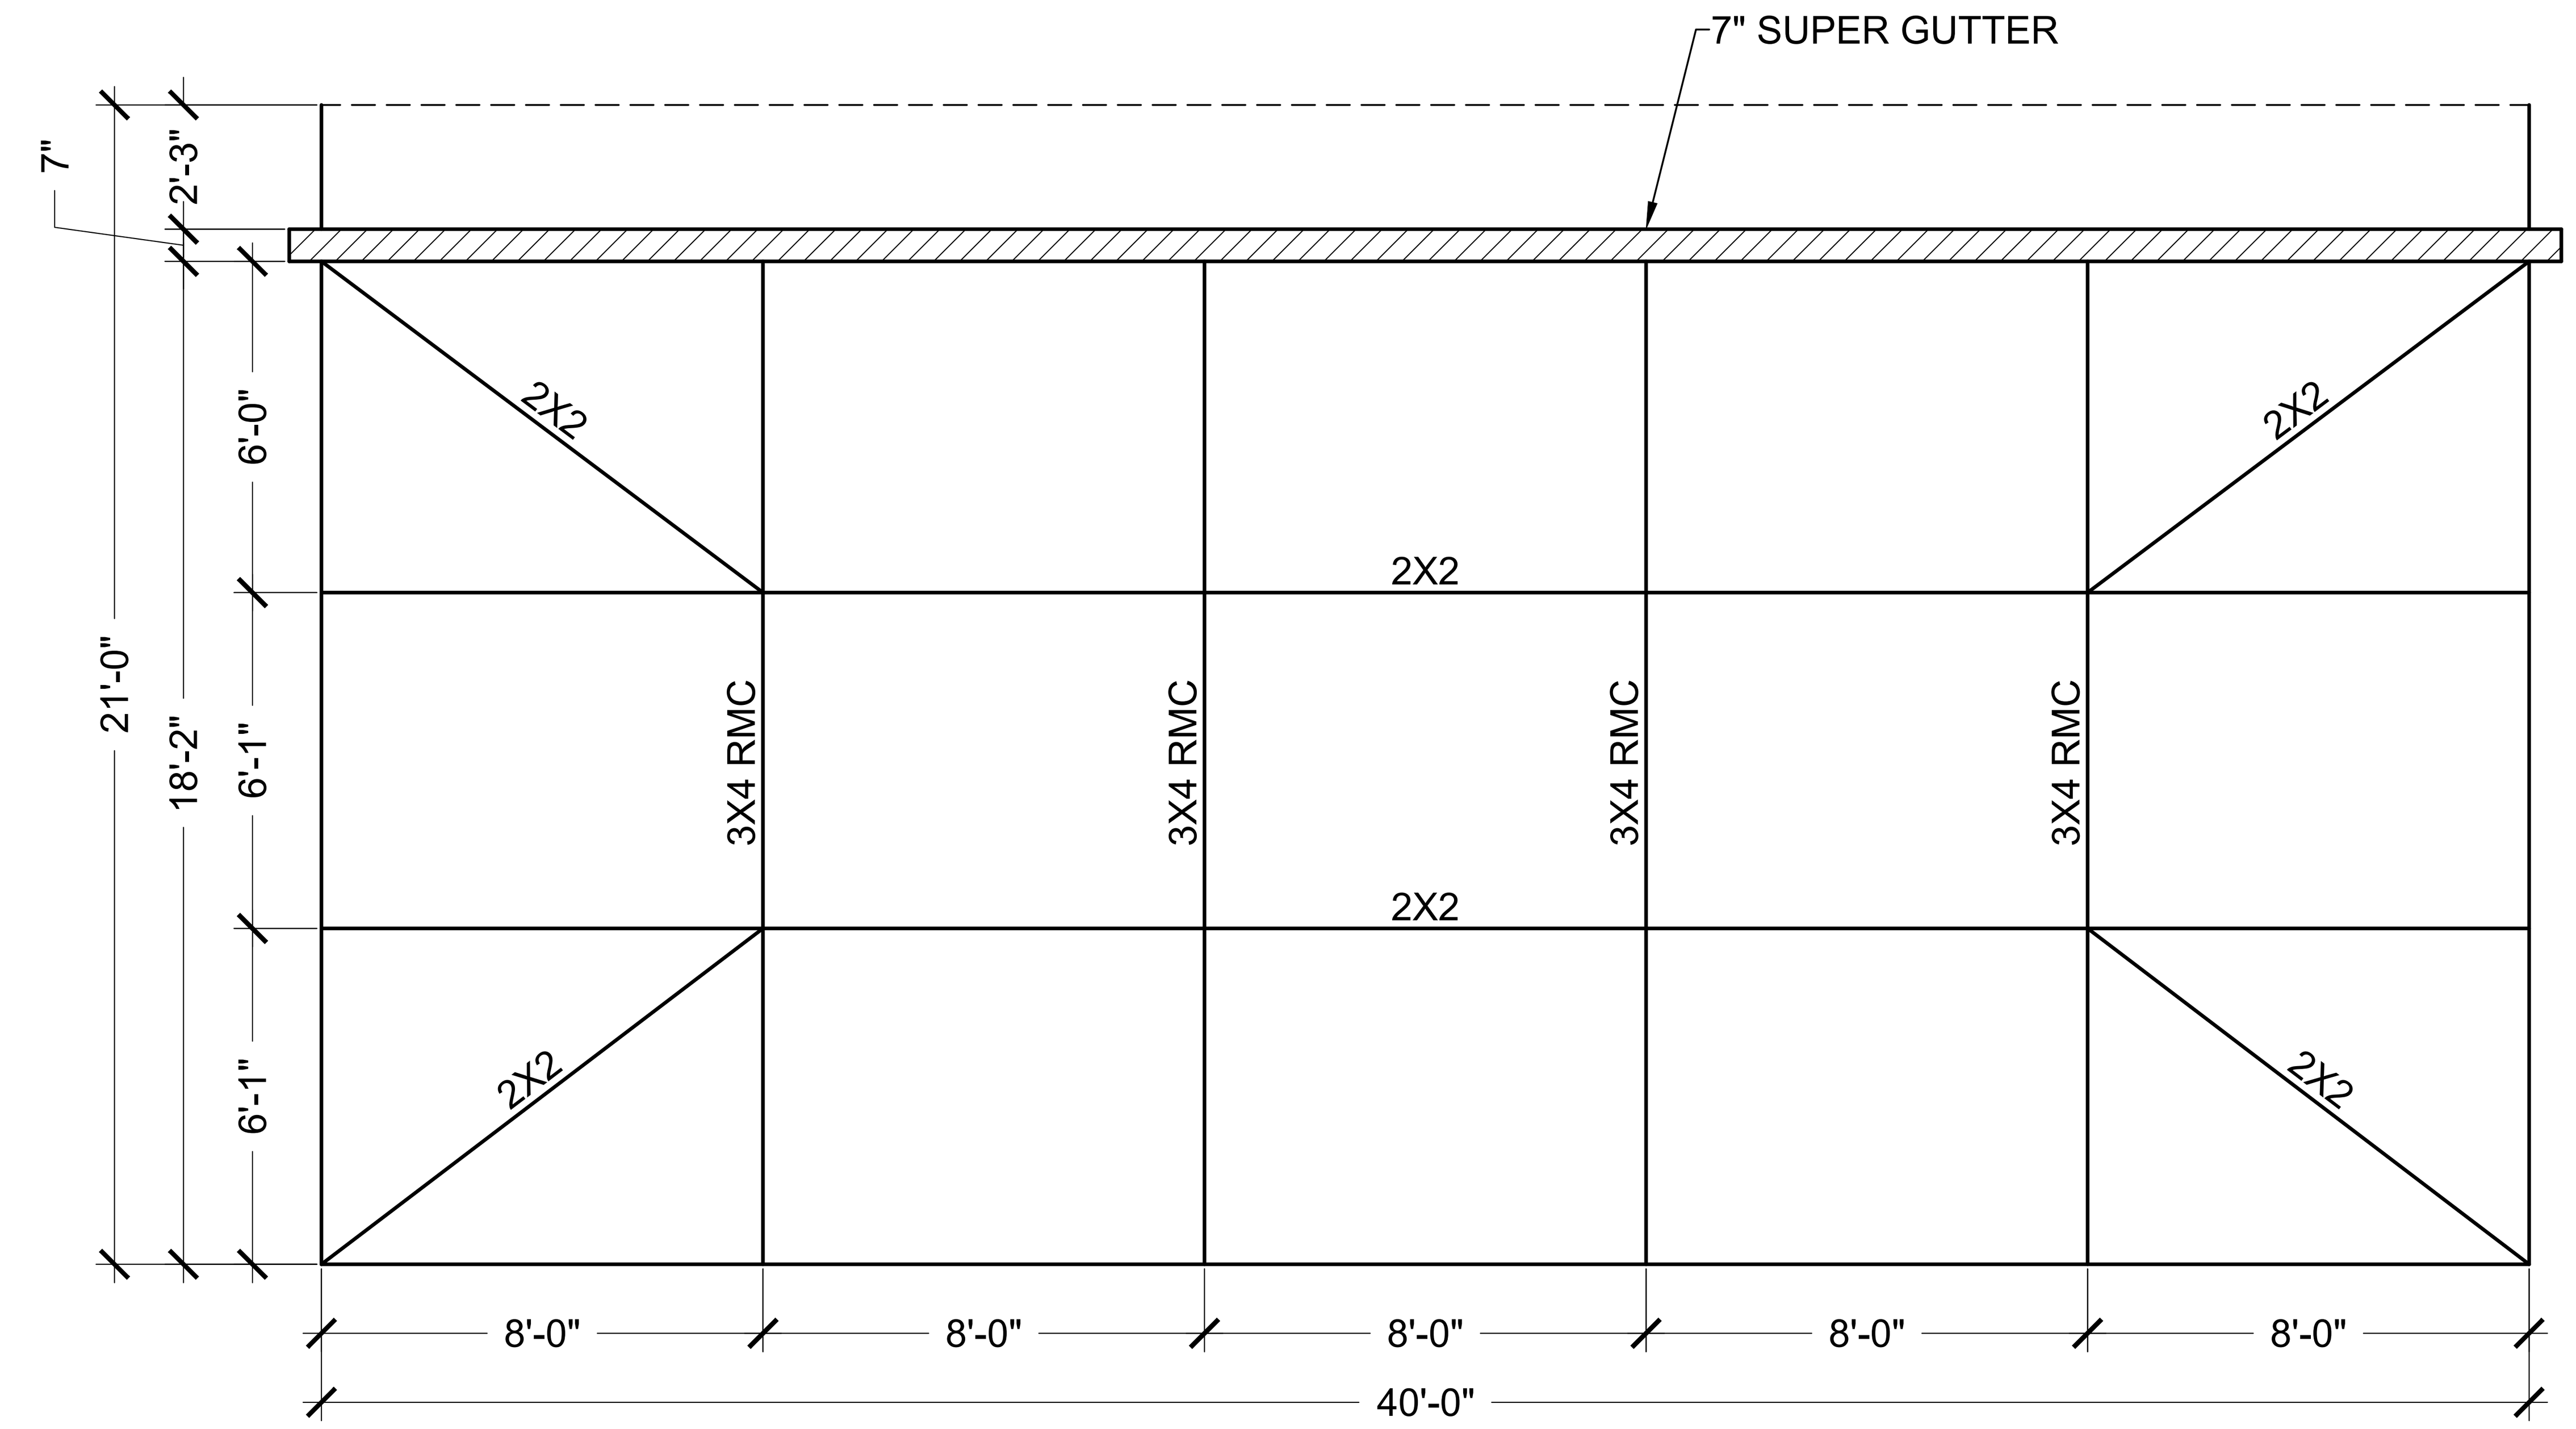

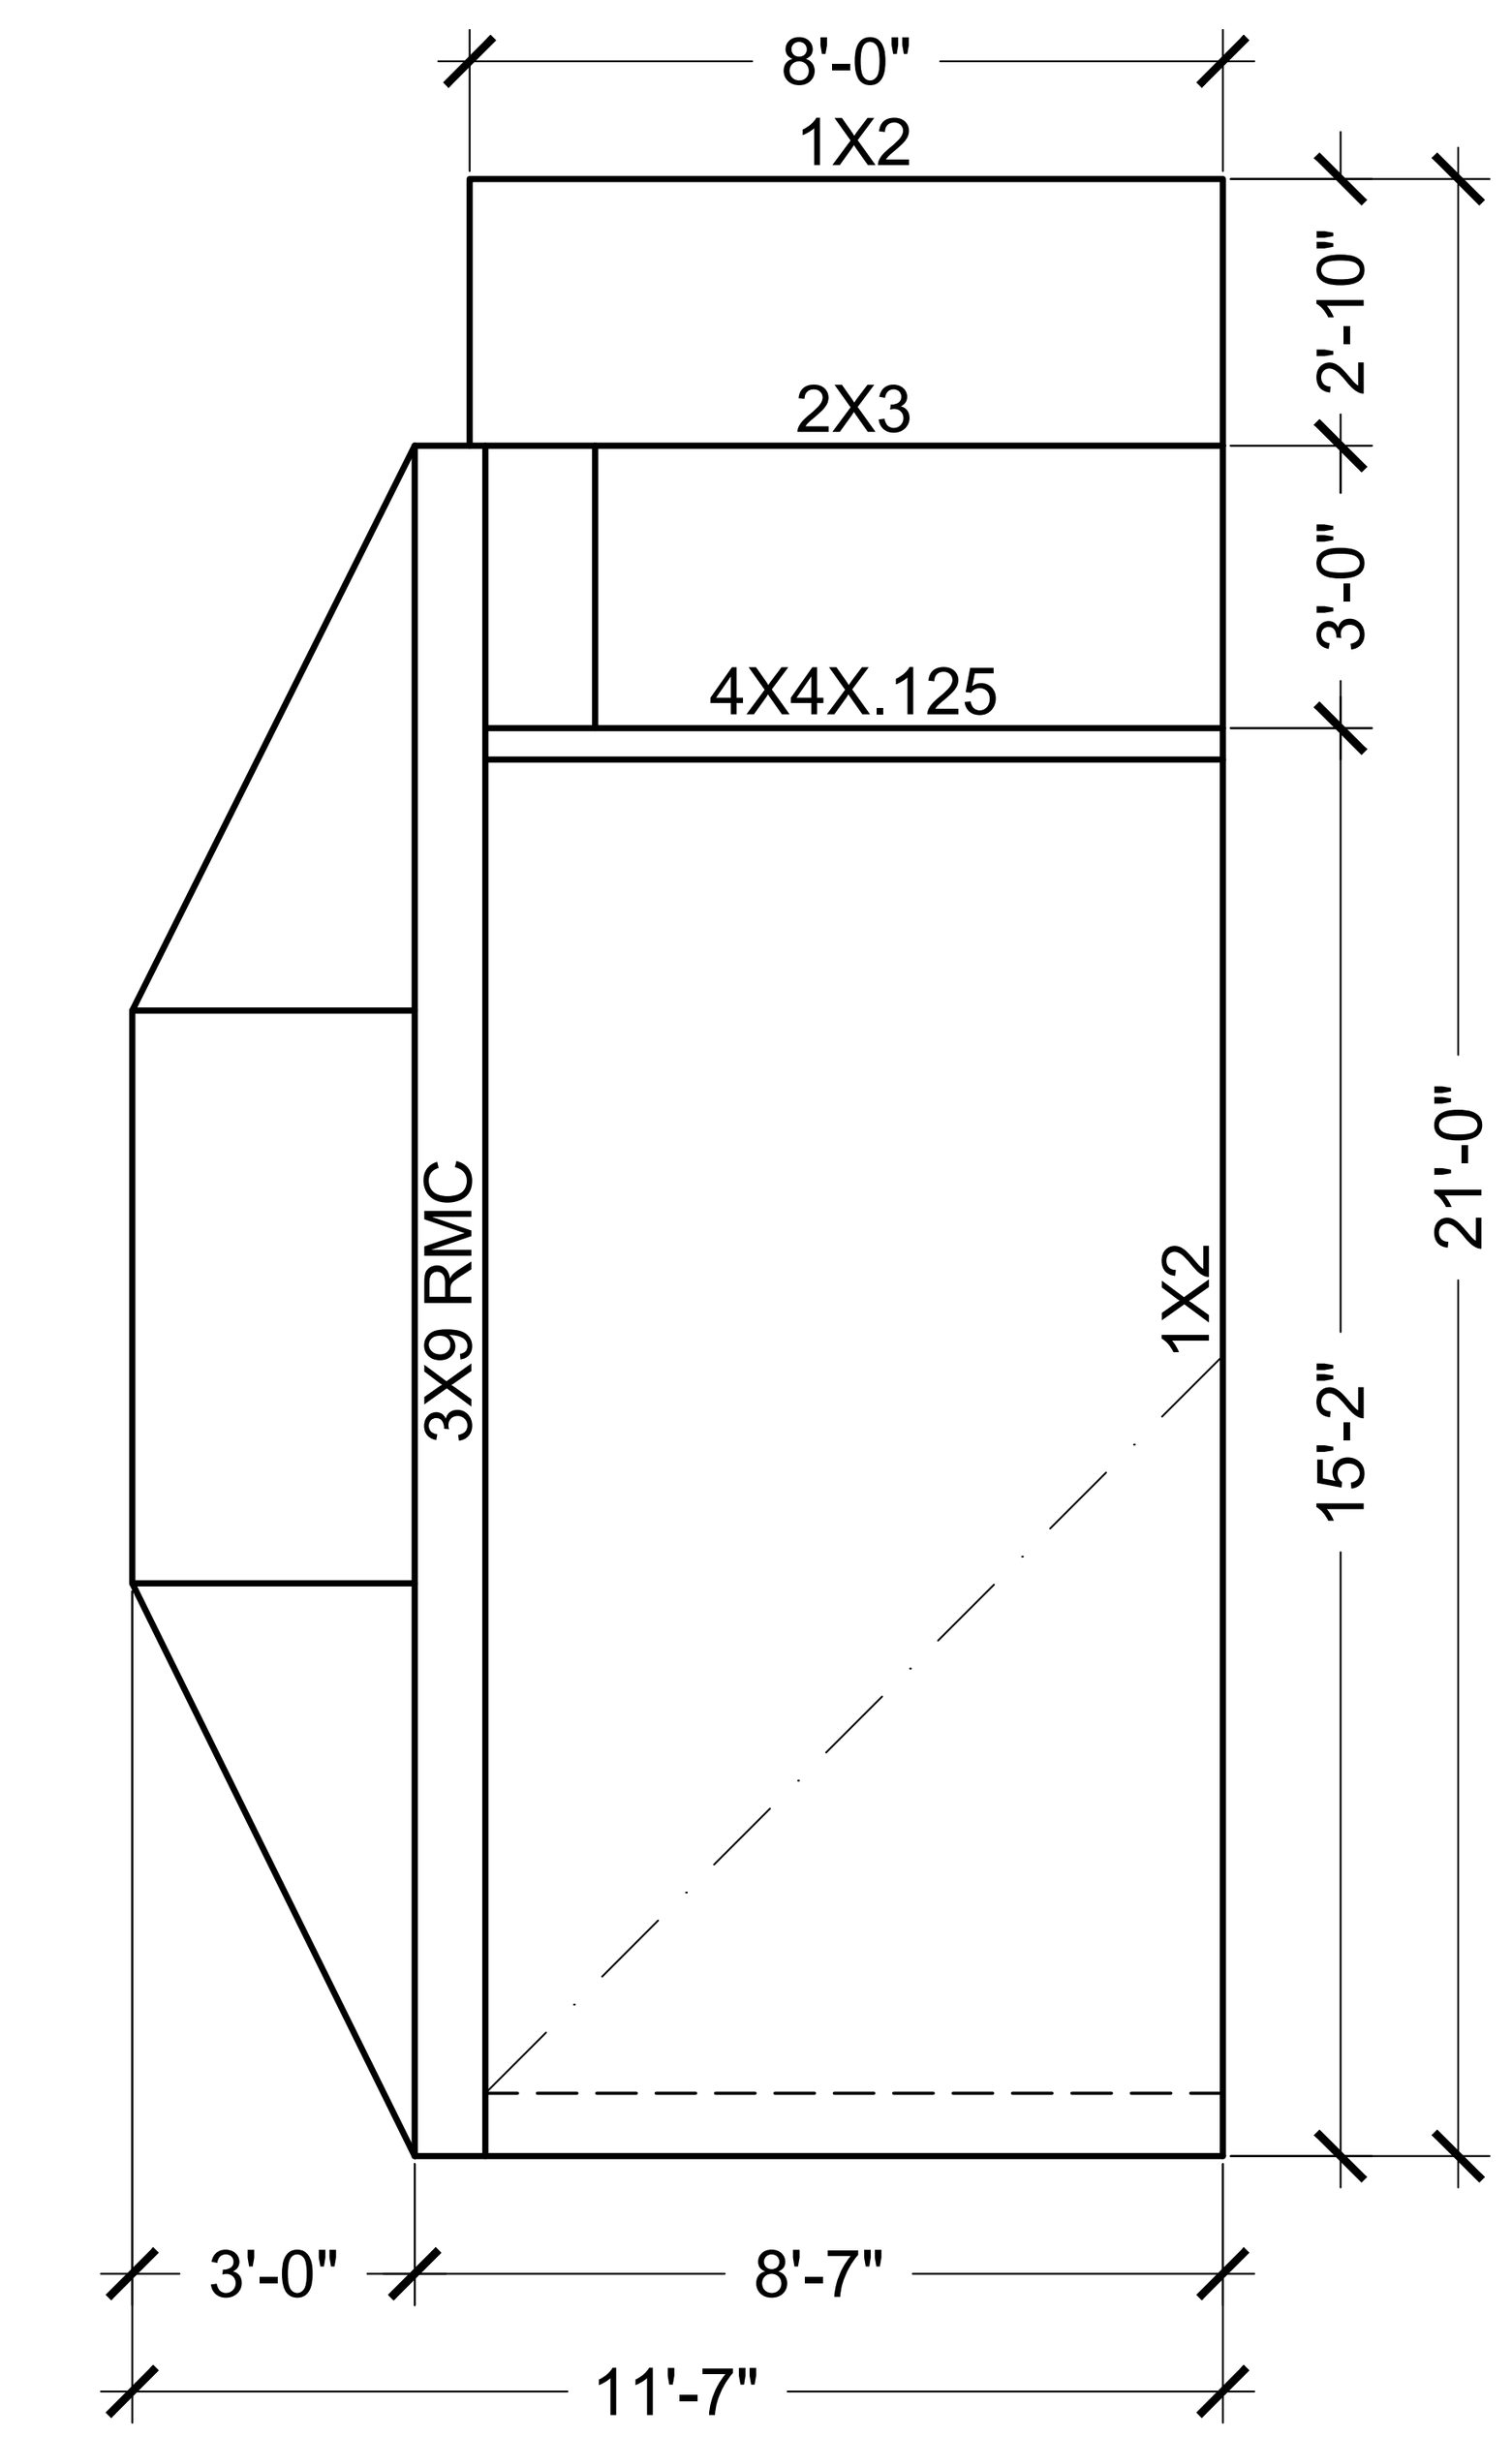

LEGEND:

Indicated cable bracing. See details on sheet 3.

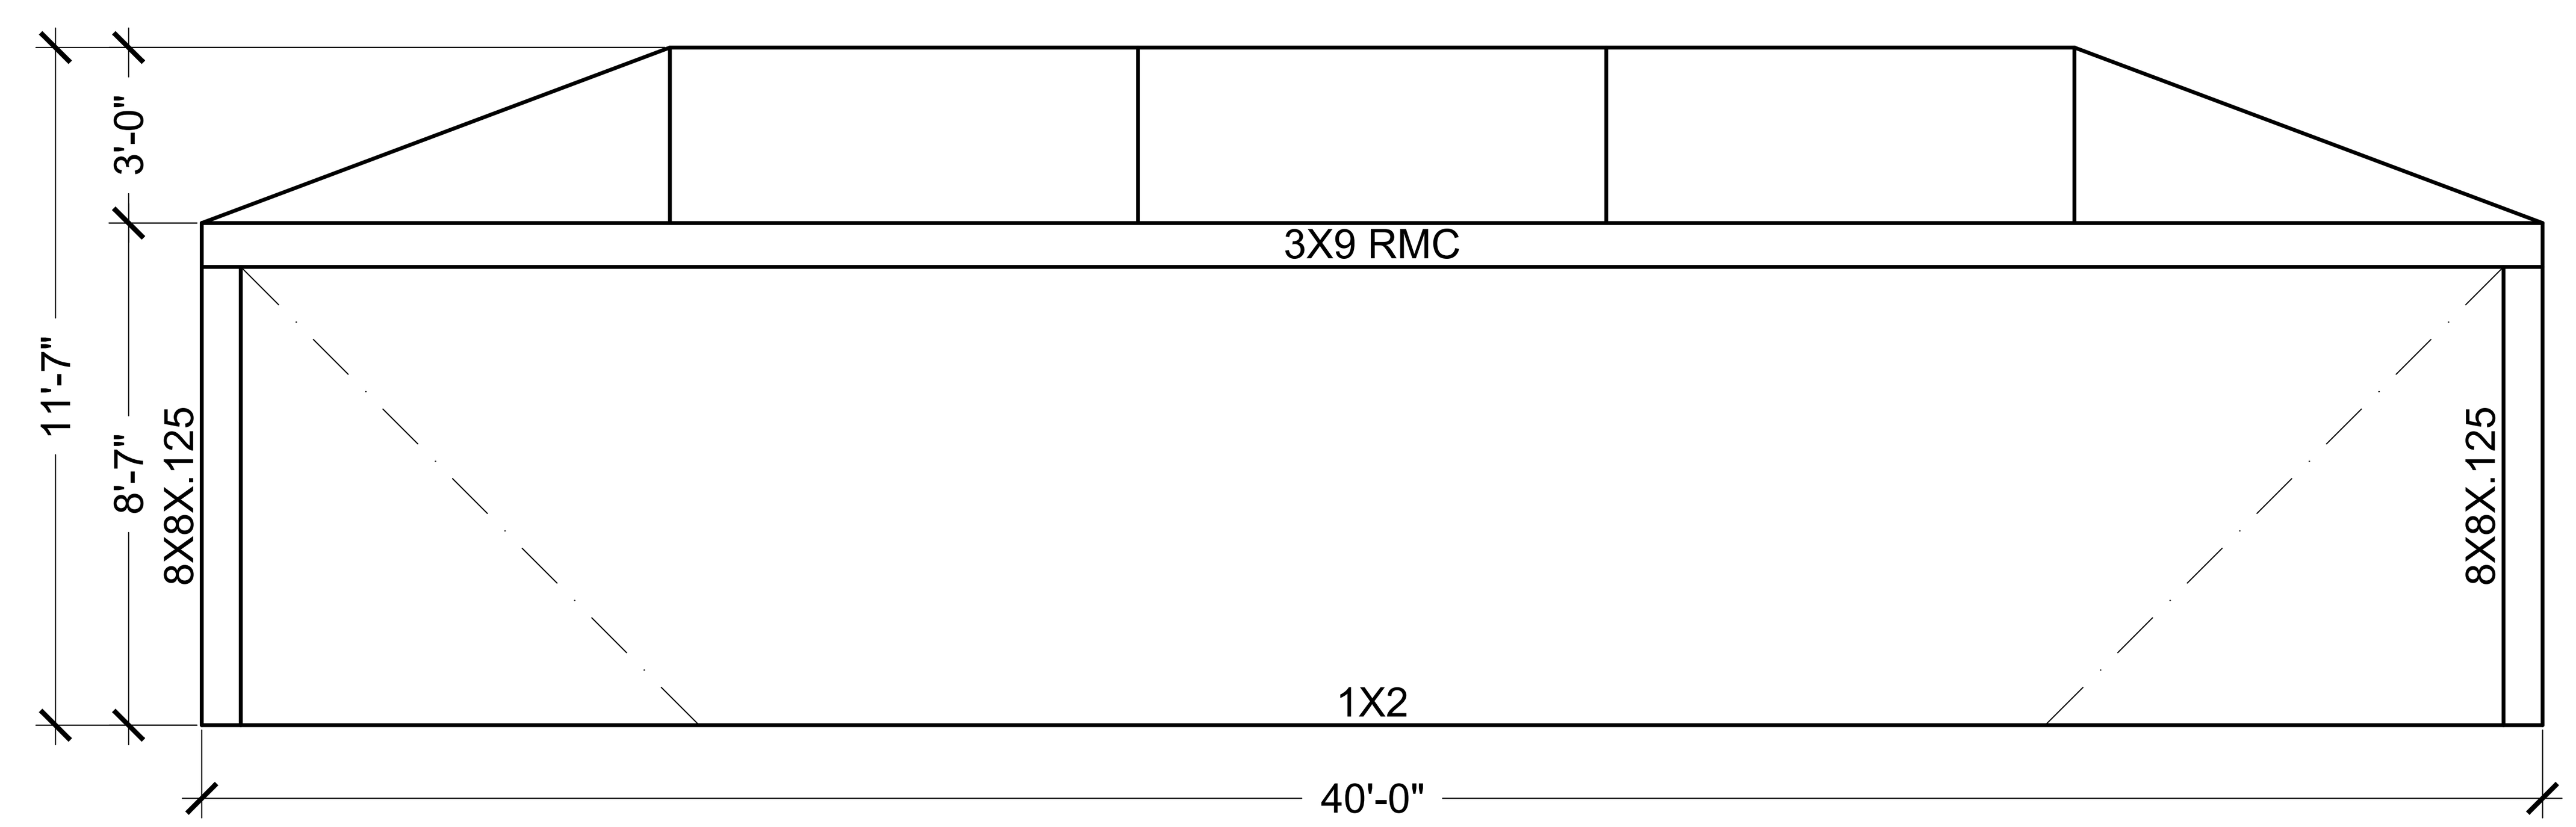

NOTE: Door location and framing are not structural and can be moved, as necessary, per contractor and owner approval.

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	5/28/2026

NOTICE:

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 5/28/2026

SHEET: 2

DRAWING TITLE: STRUCTURAL DESIGN

PROJECT NAME: HODGES, MICHAEL

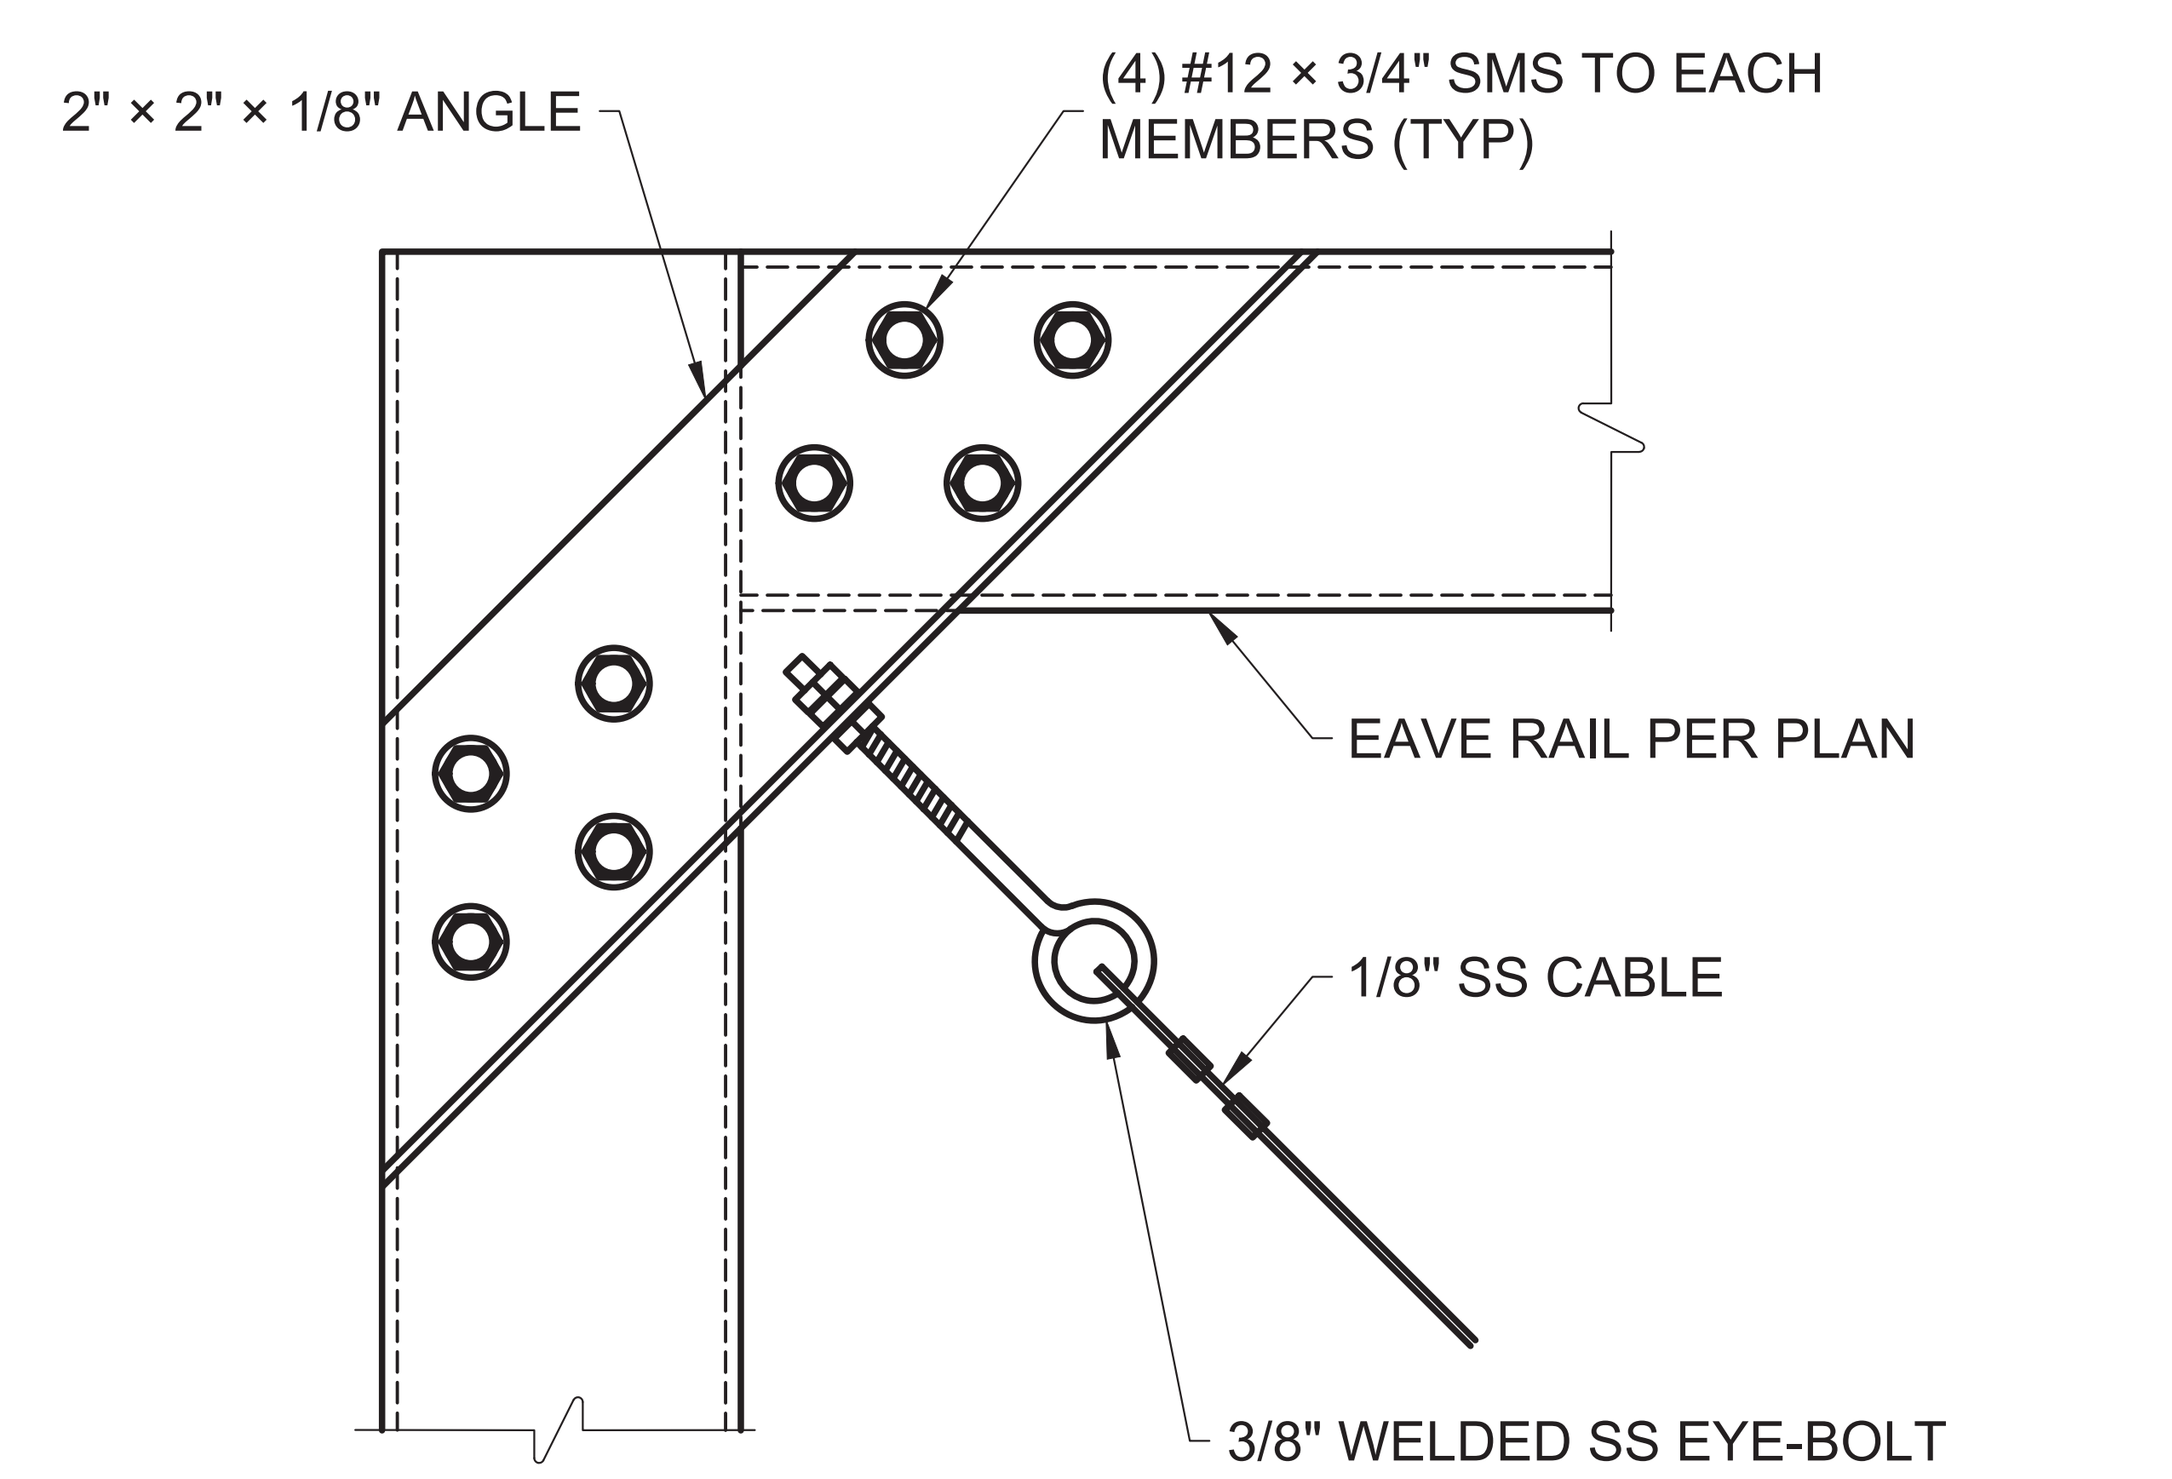

CABLE TO FRAME CONNECTION
SCALE: N.T.S.

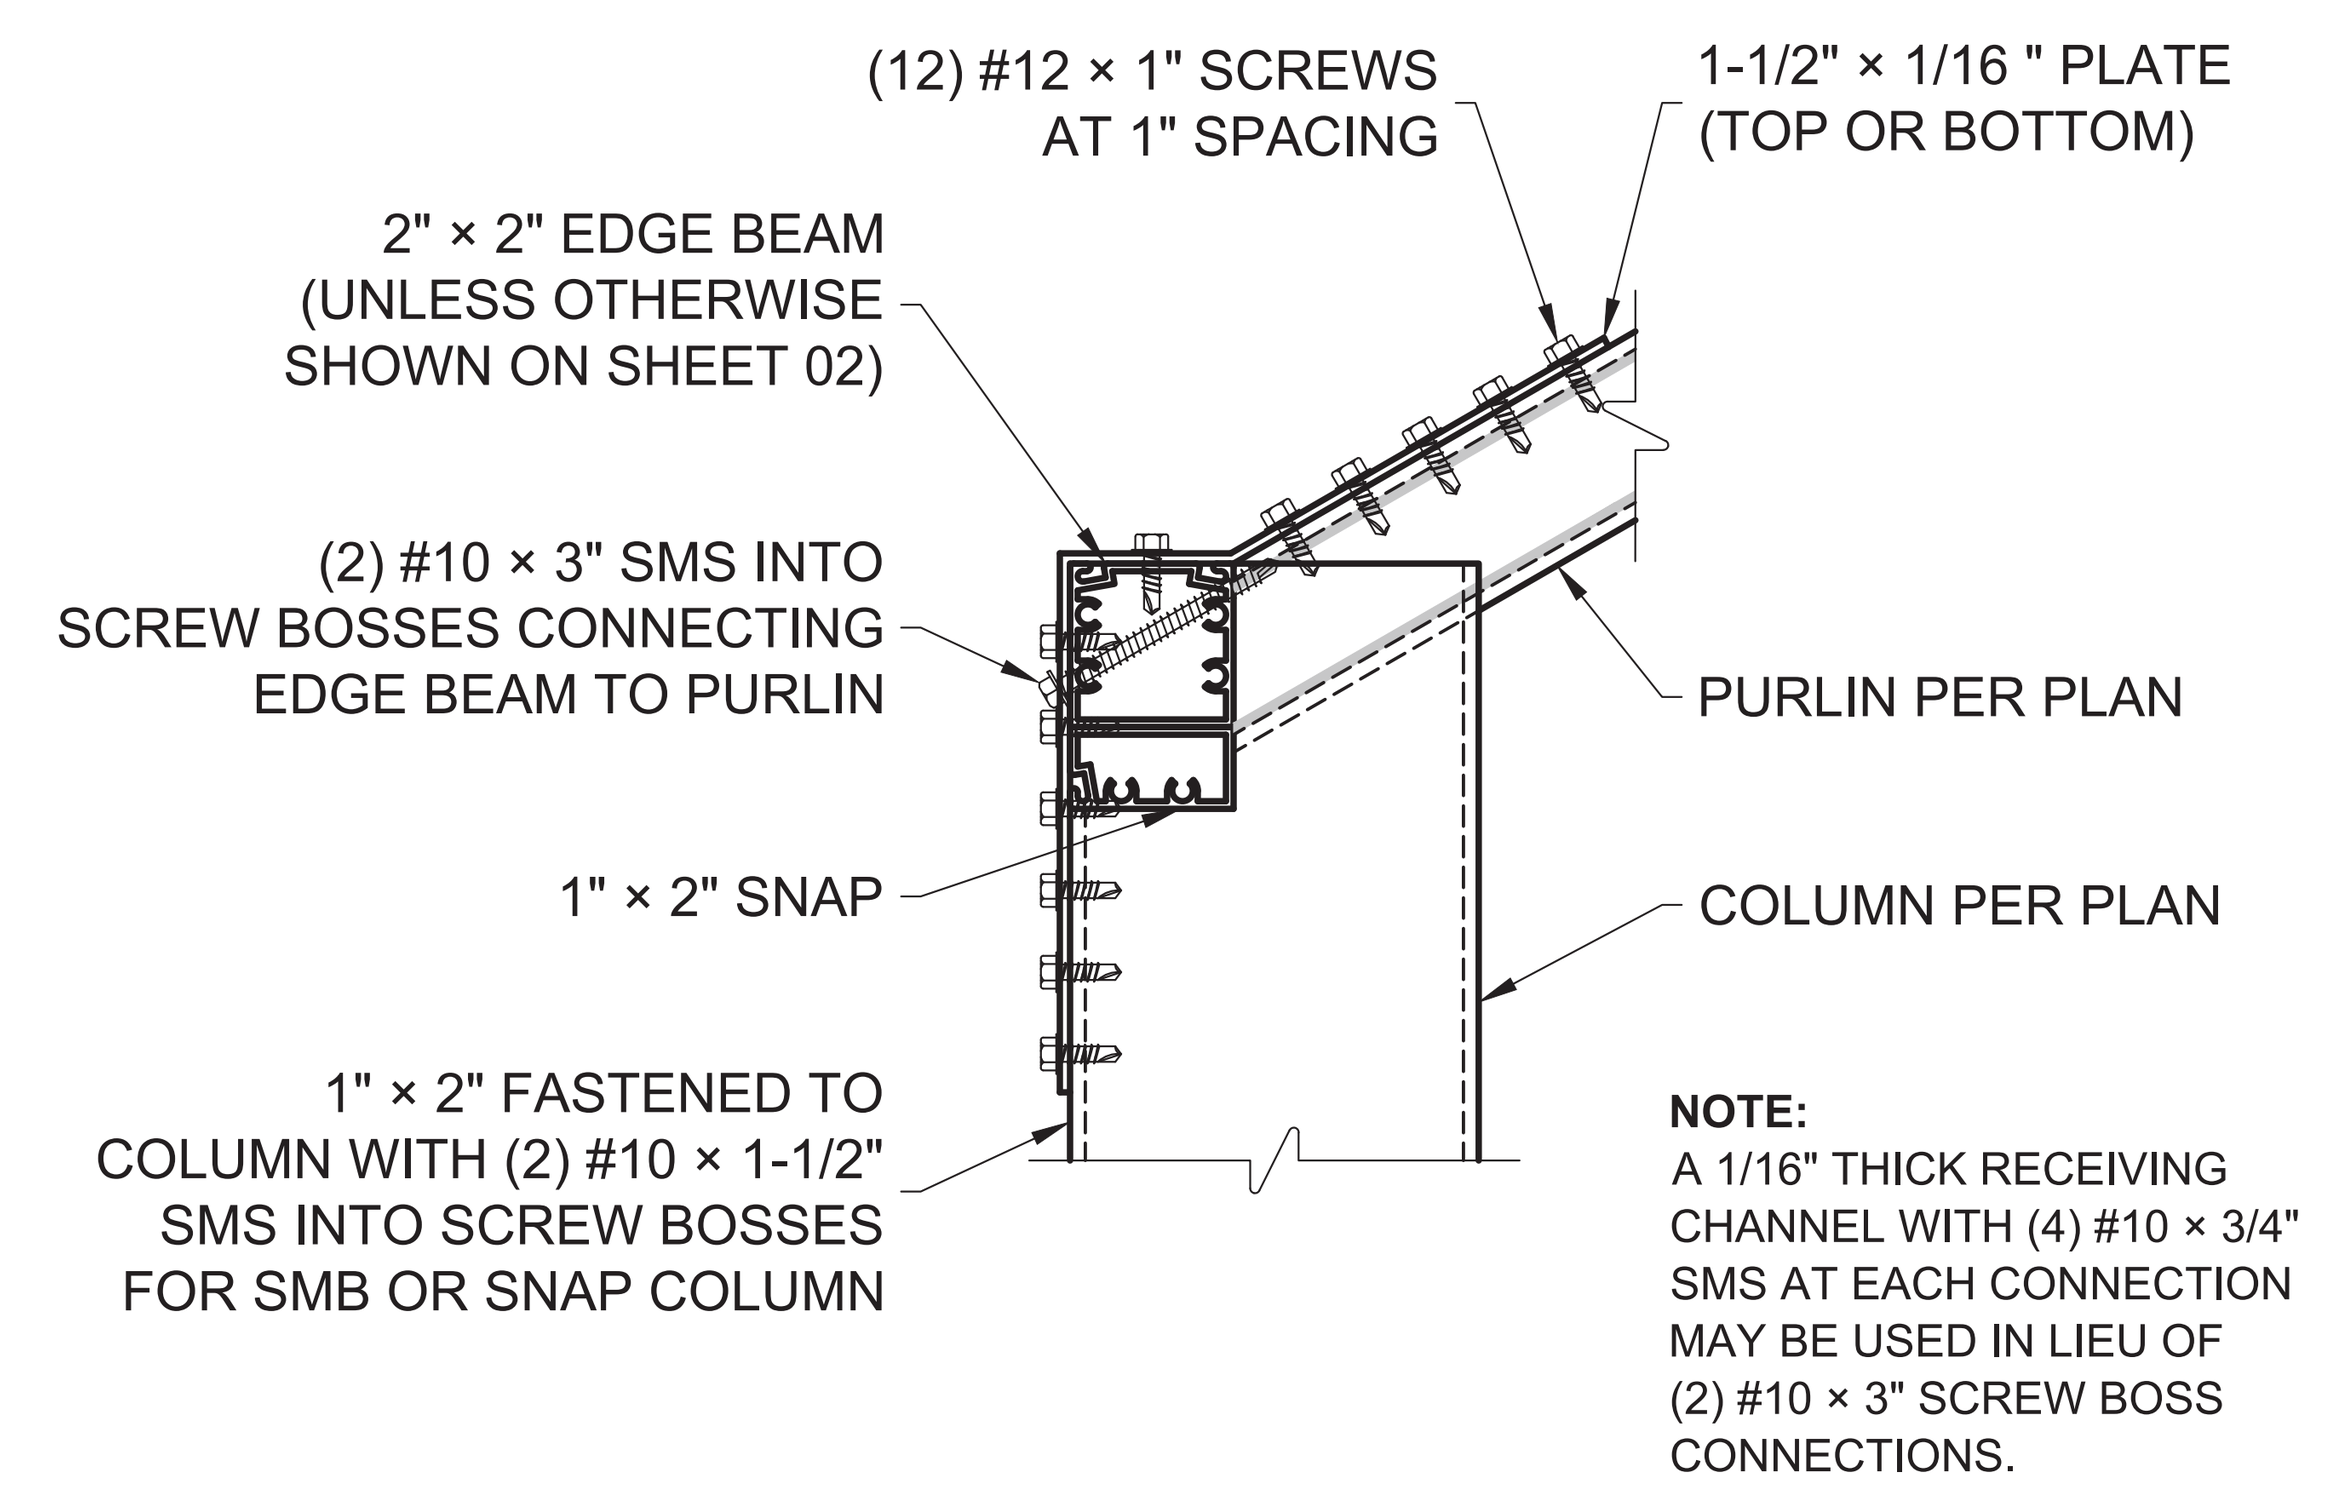

SLOPED PURLIN TO COLUMN CONNECTION
SCALE: N.T.S.

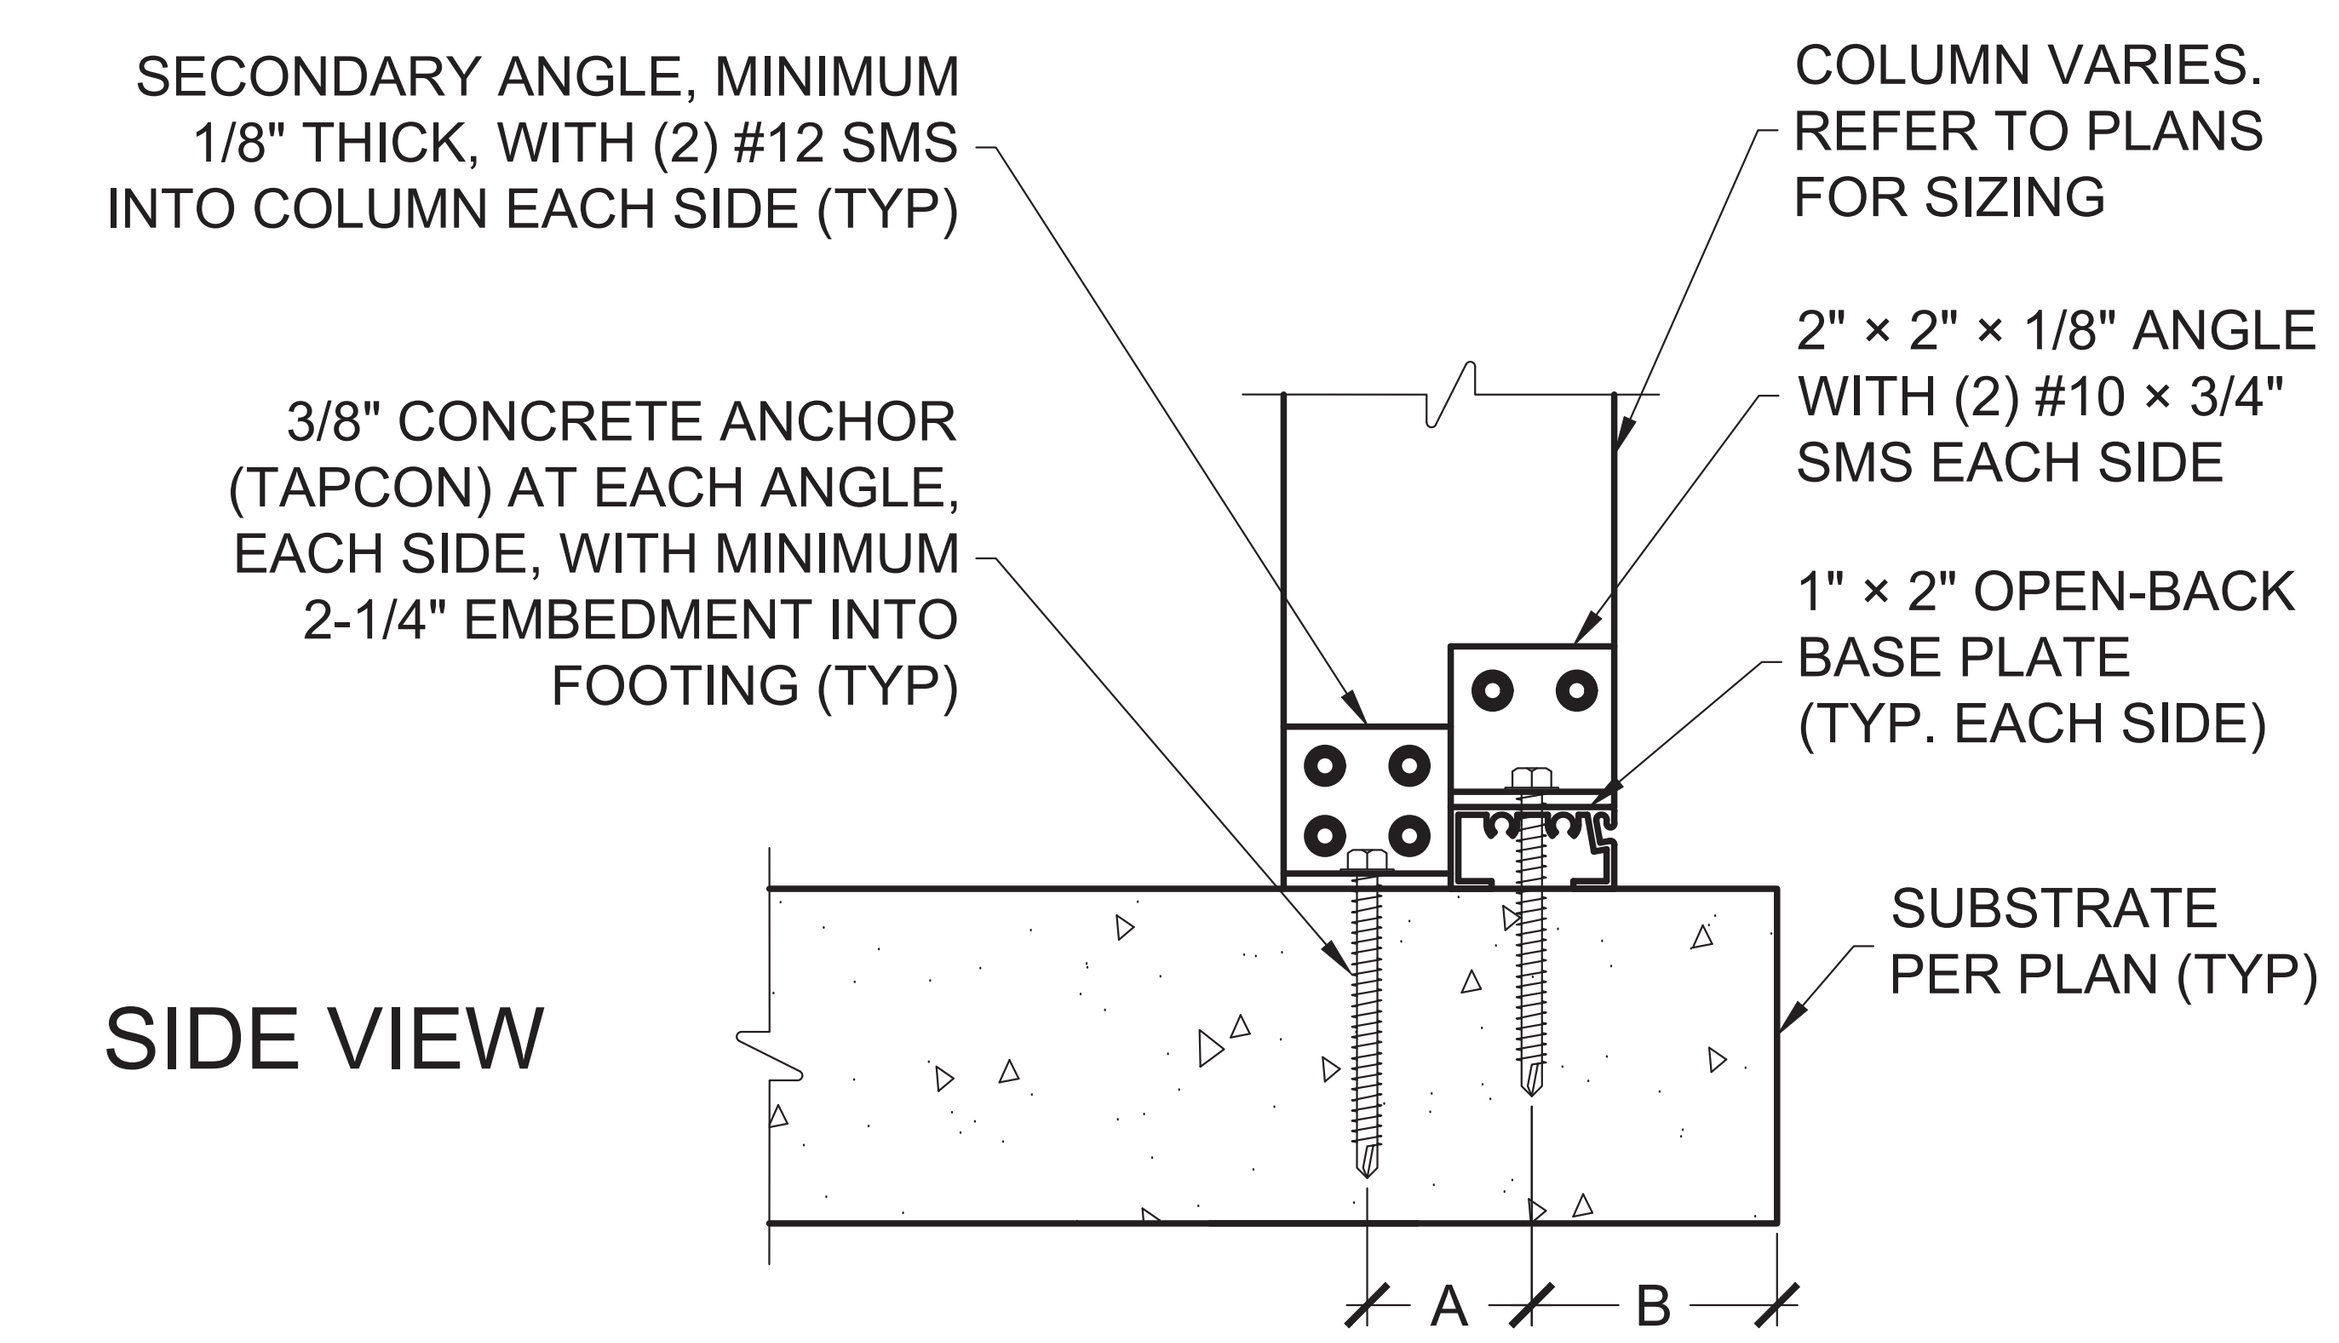

A = 2" MIN SPACING (TYP)
B = 3" MIN CONC. EDGEDISTANCE (TYP)

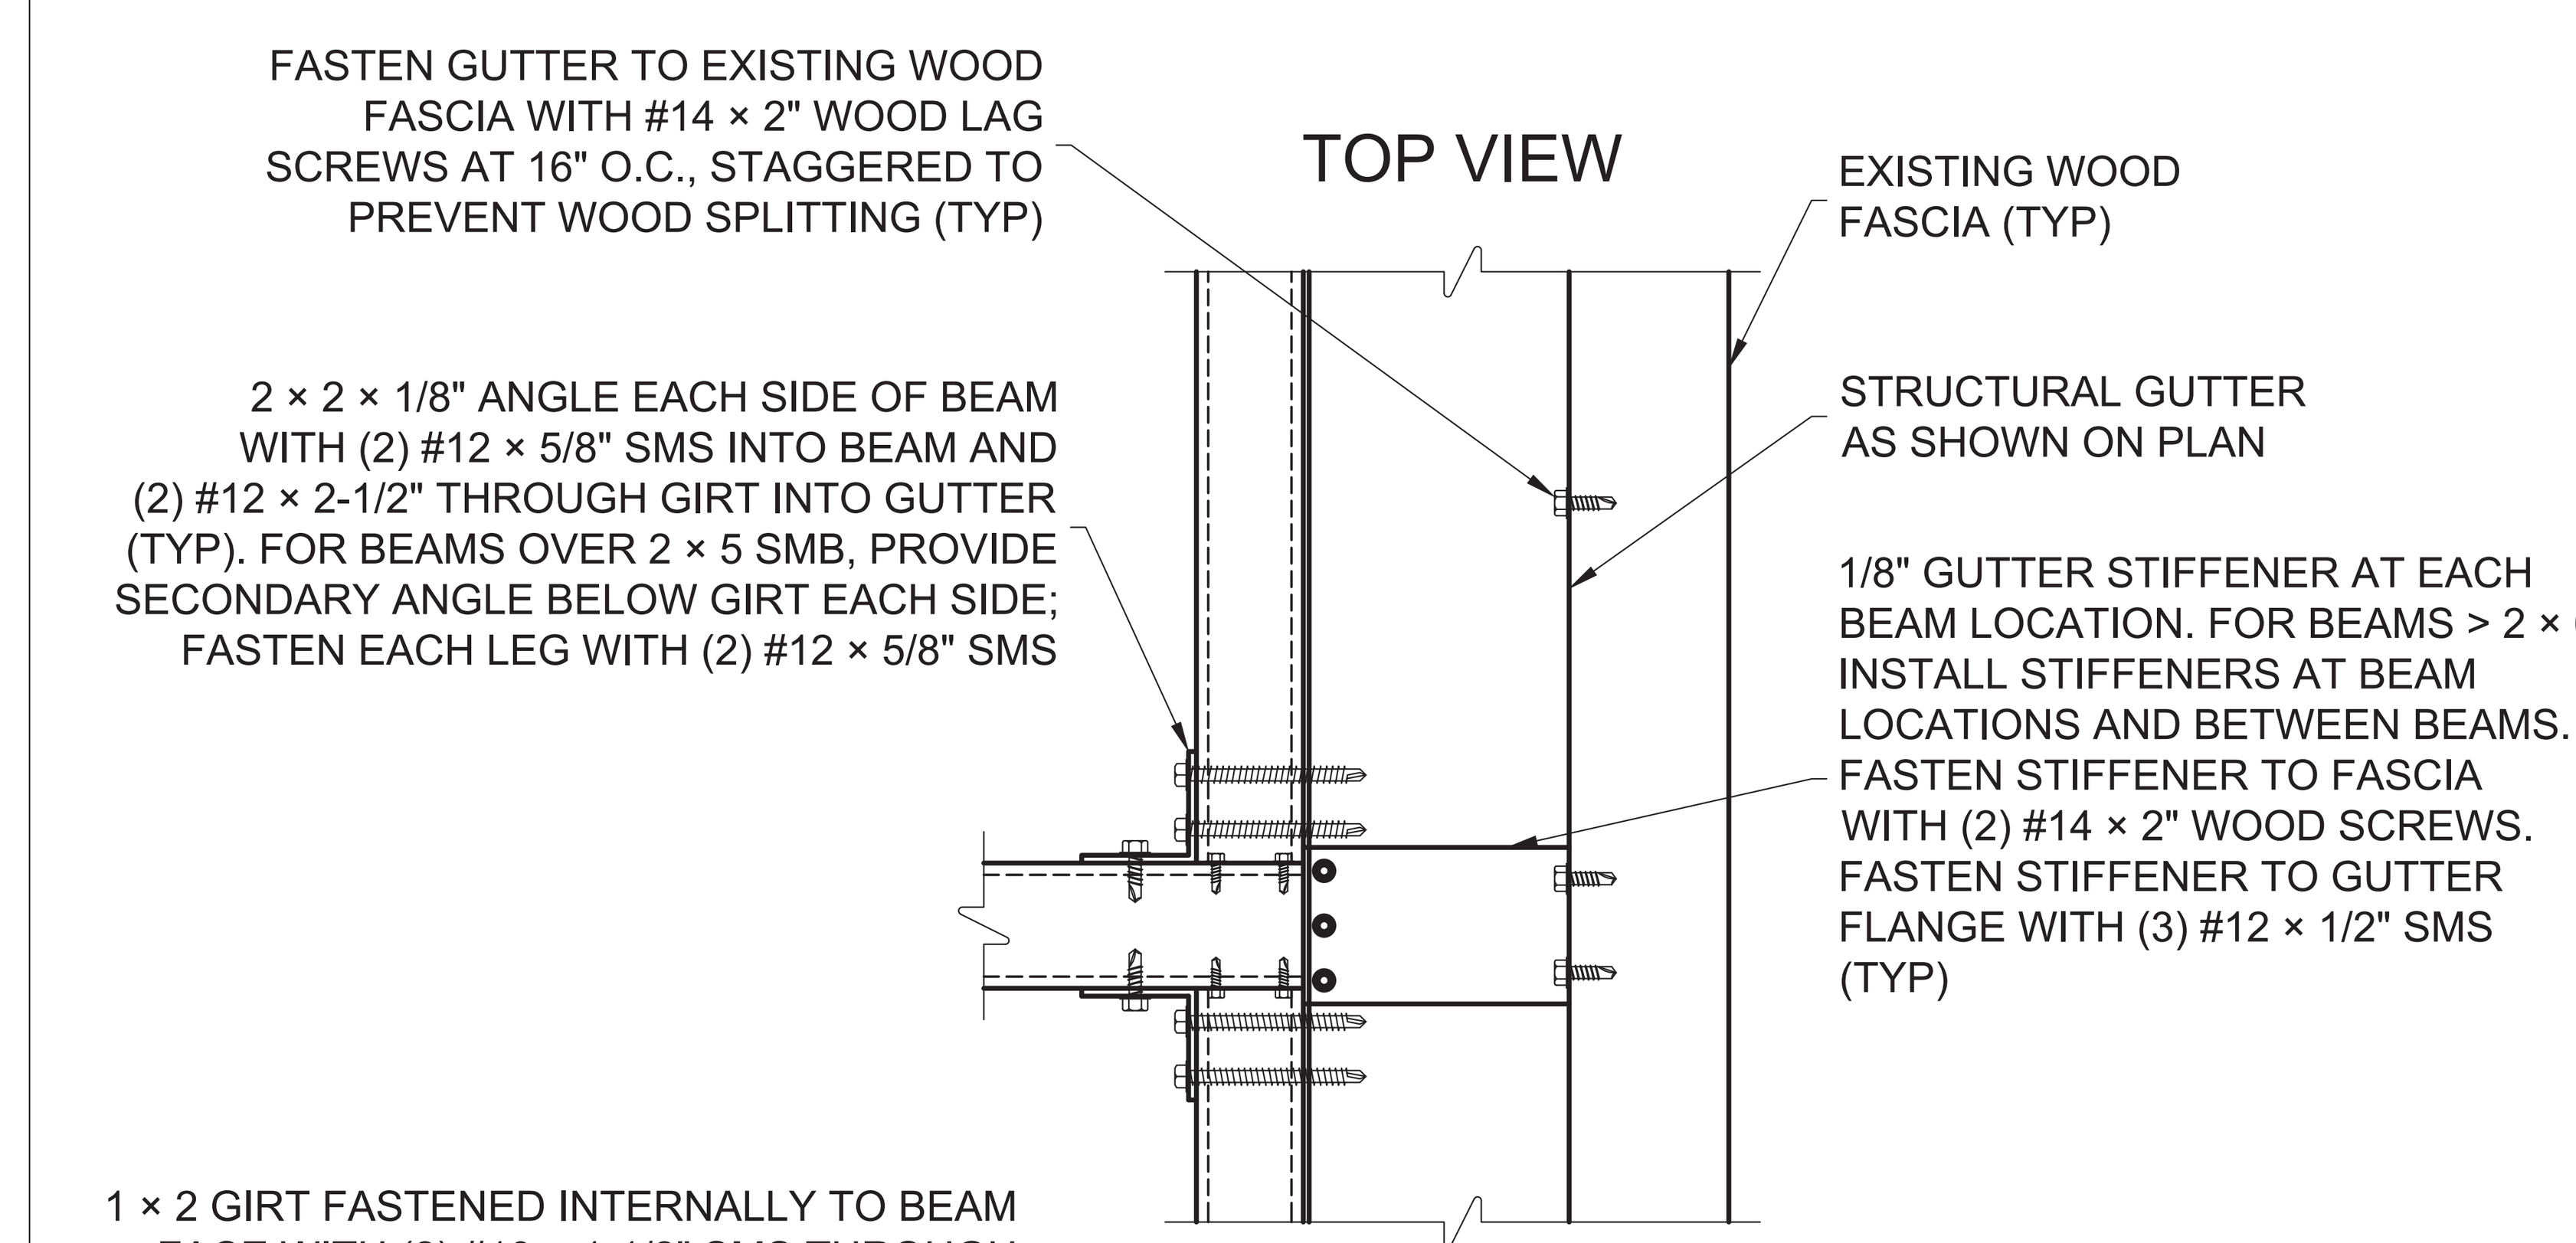

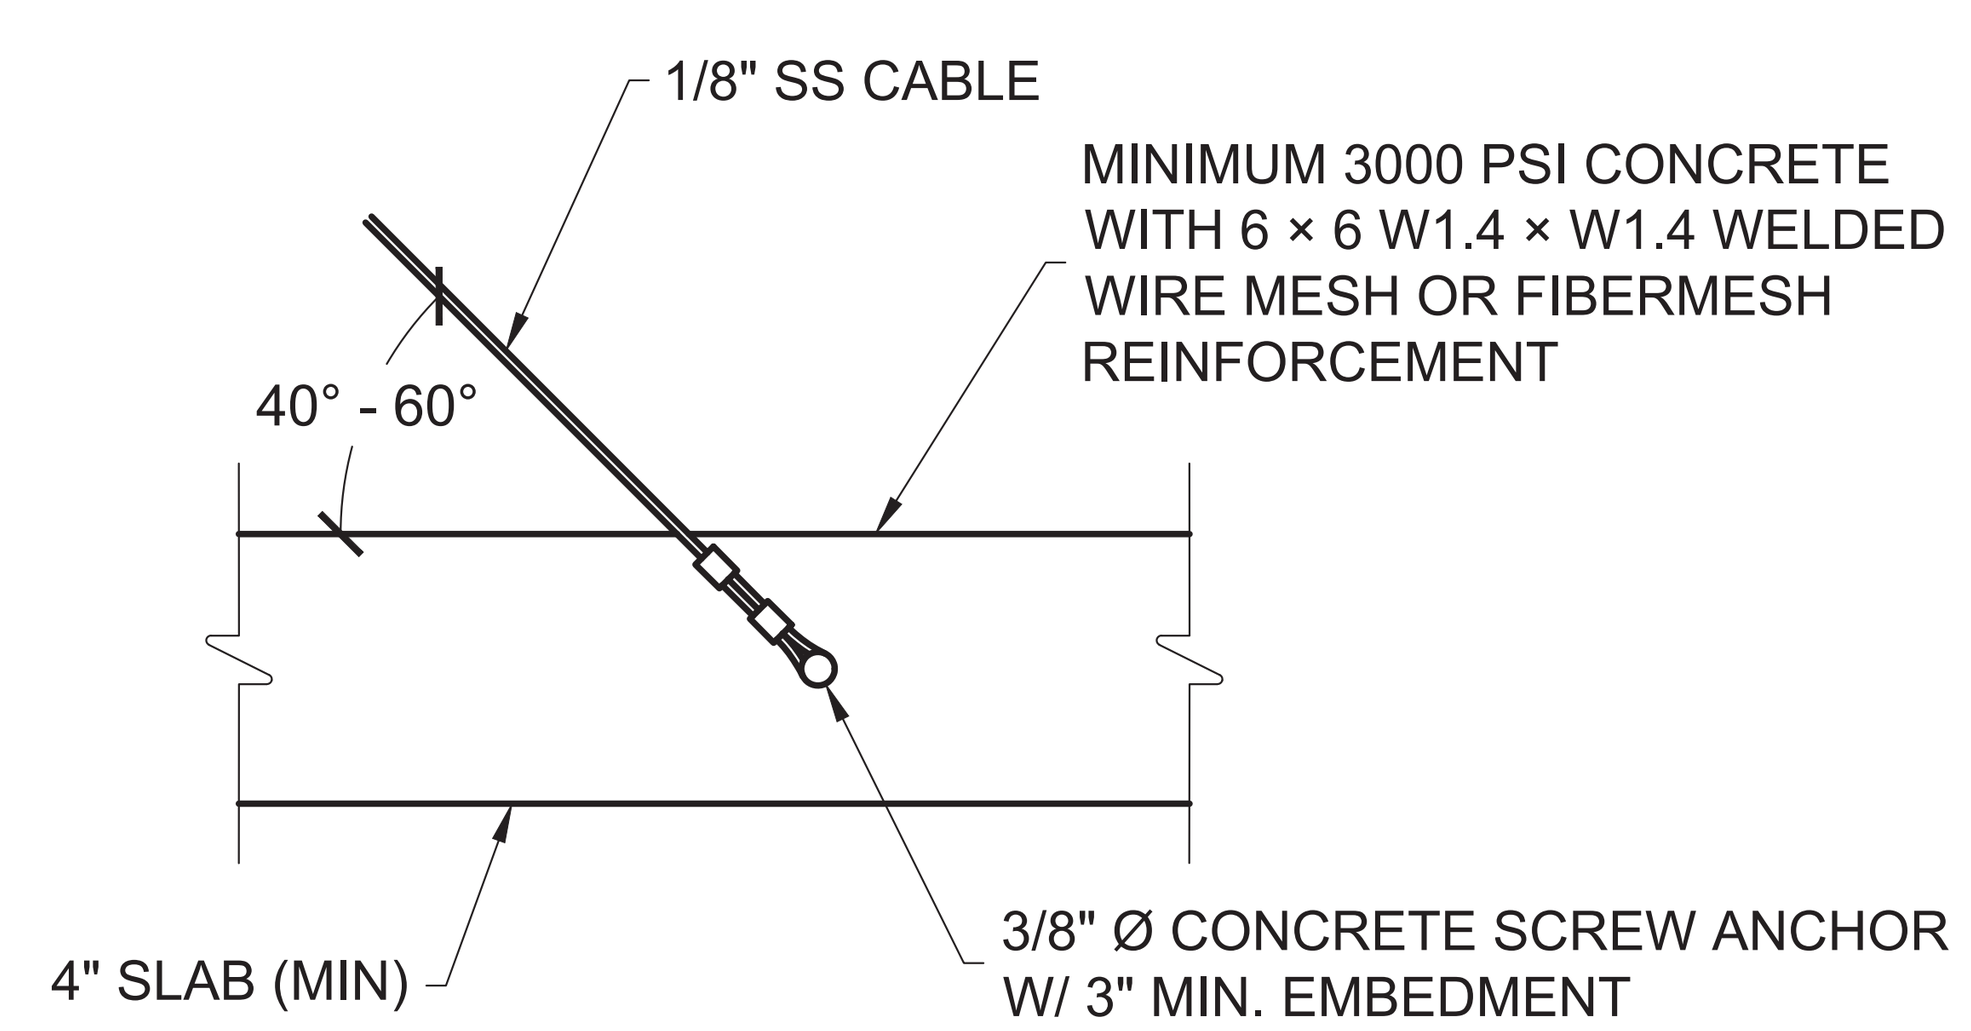

CABLE TO FOUNDATION CONNECTION
SCALE: N.T.S.

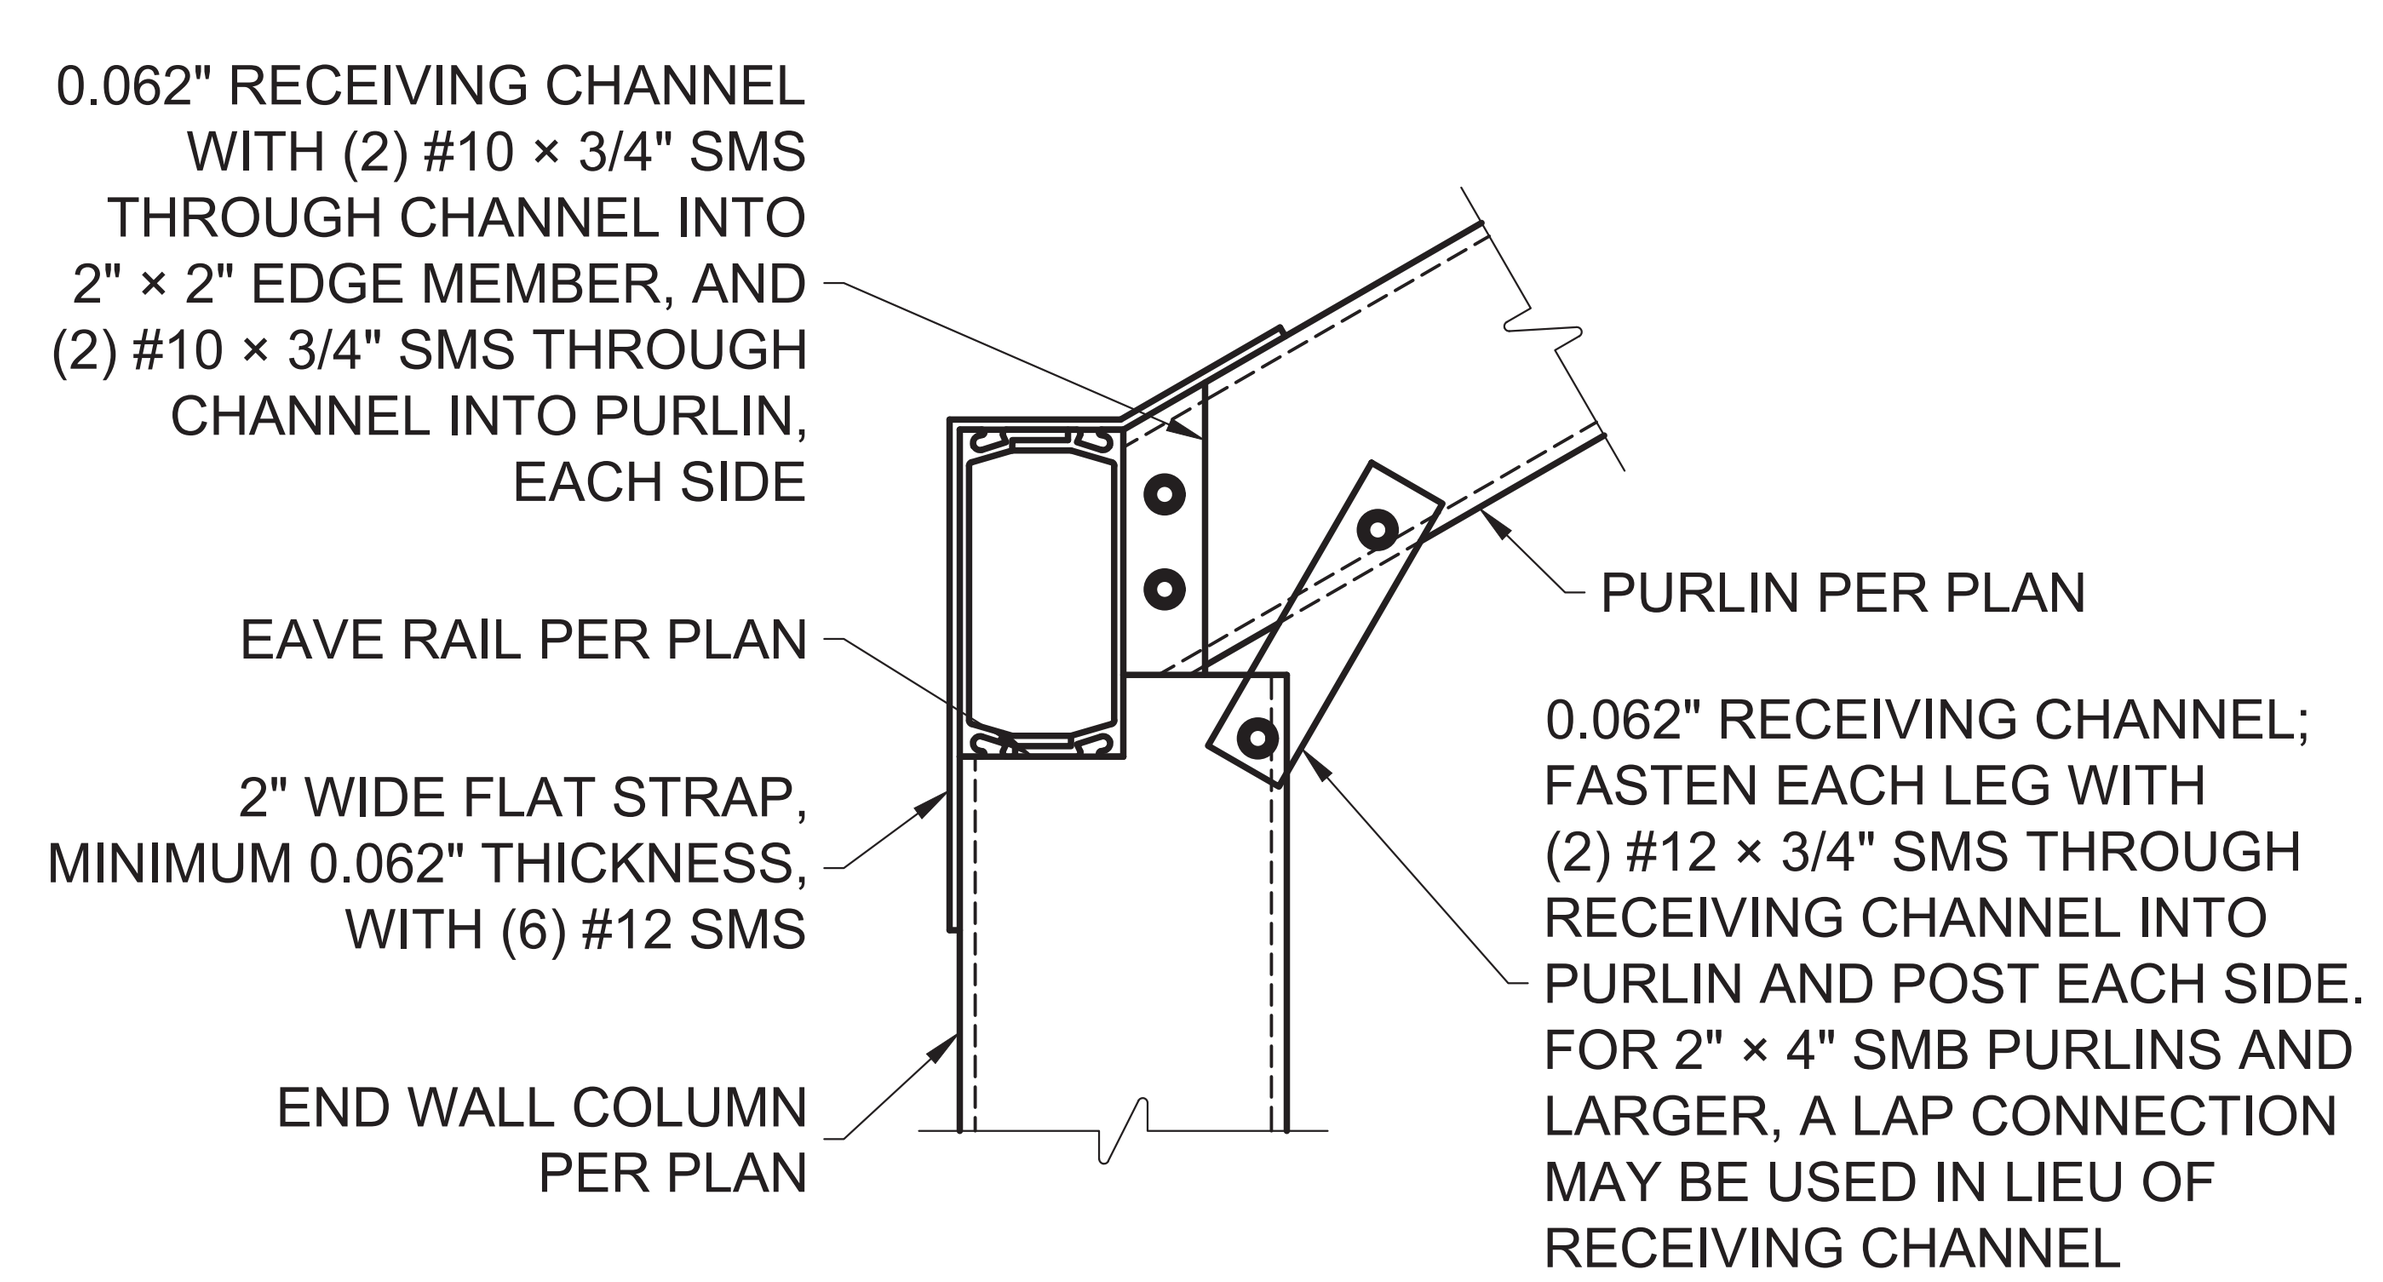

ROOF BRACE CONNECTION
SCALE: N.T.S.

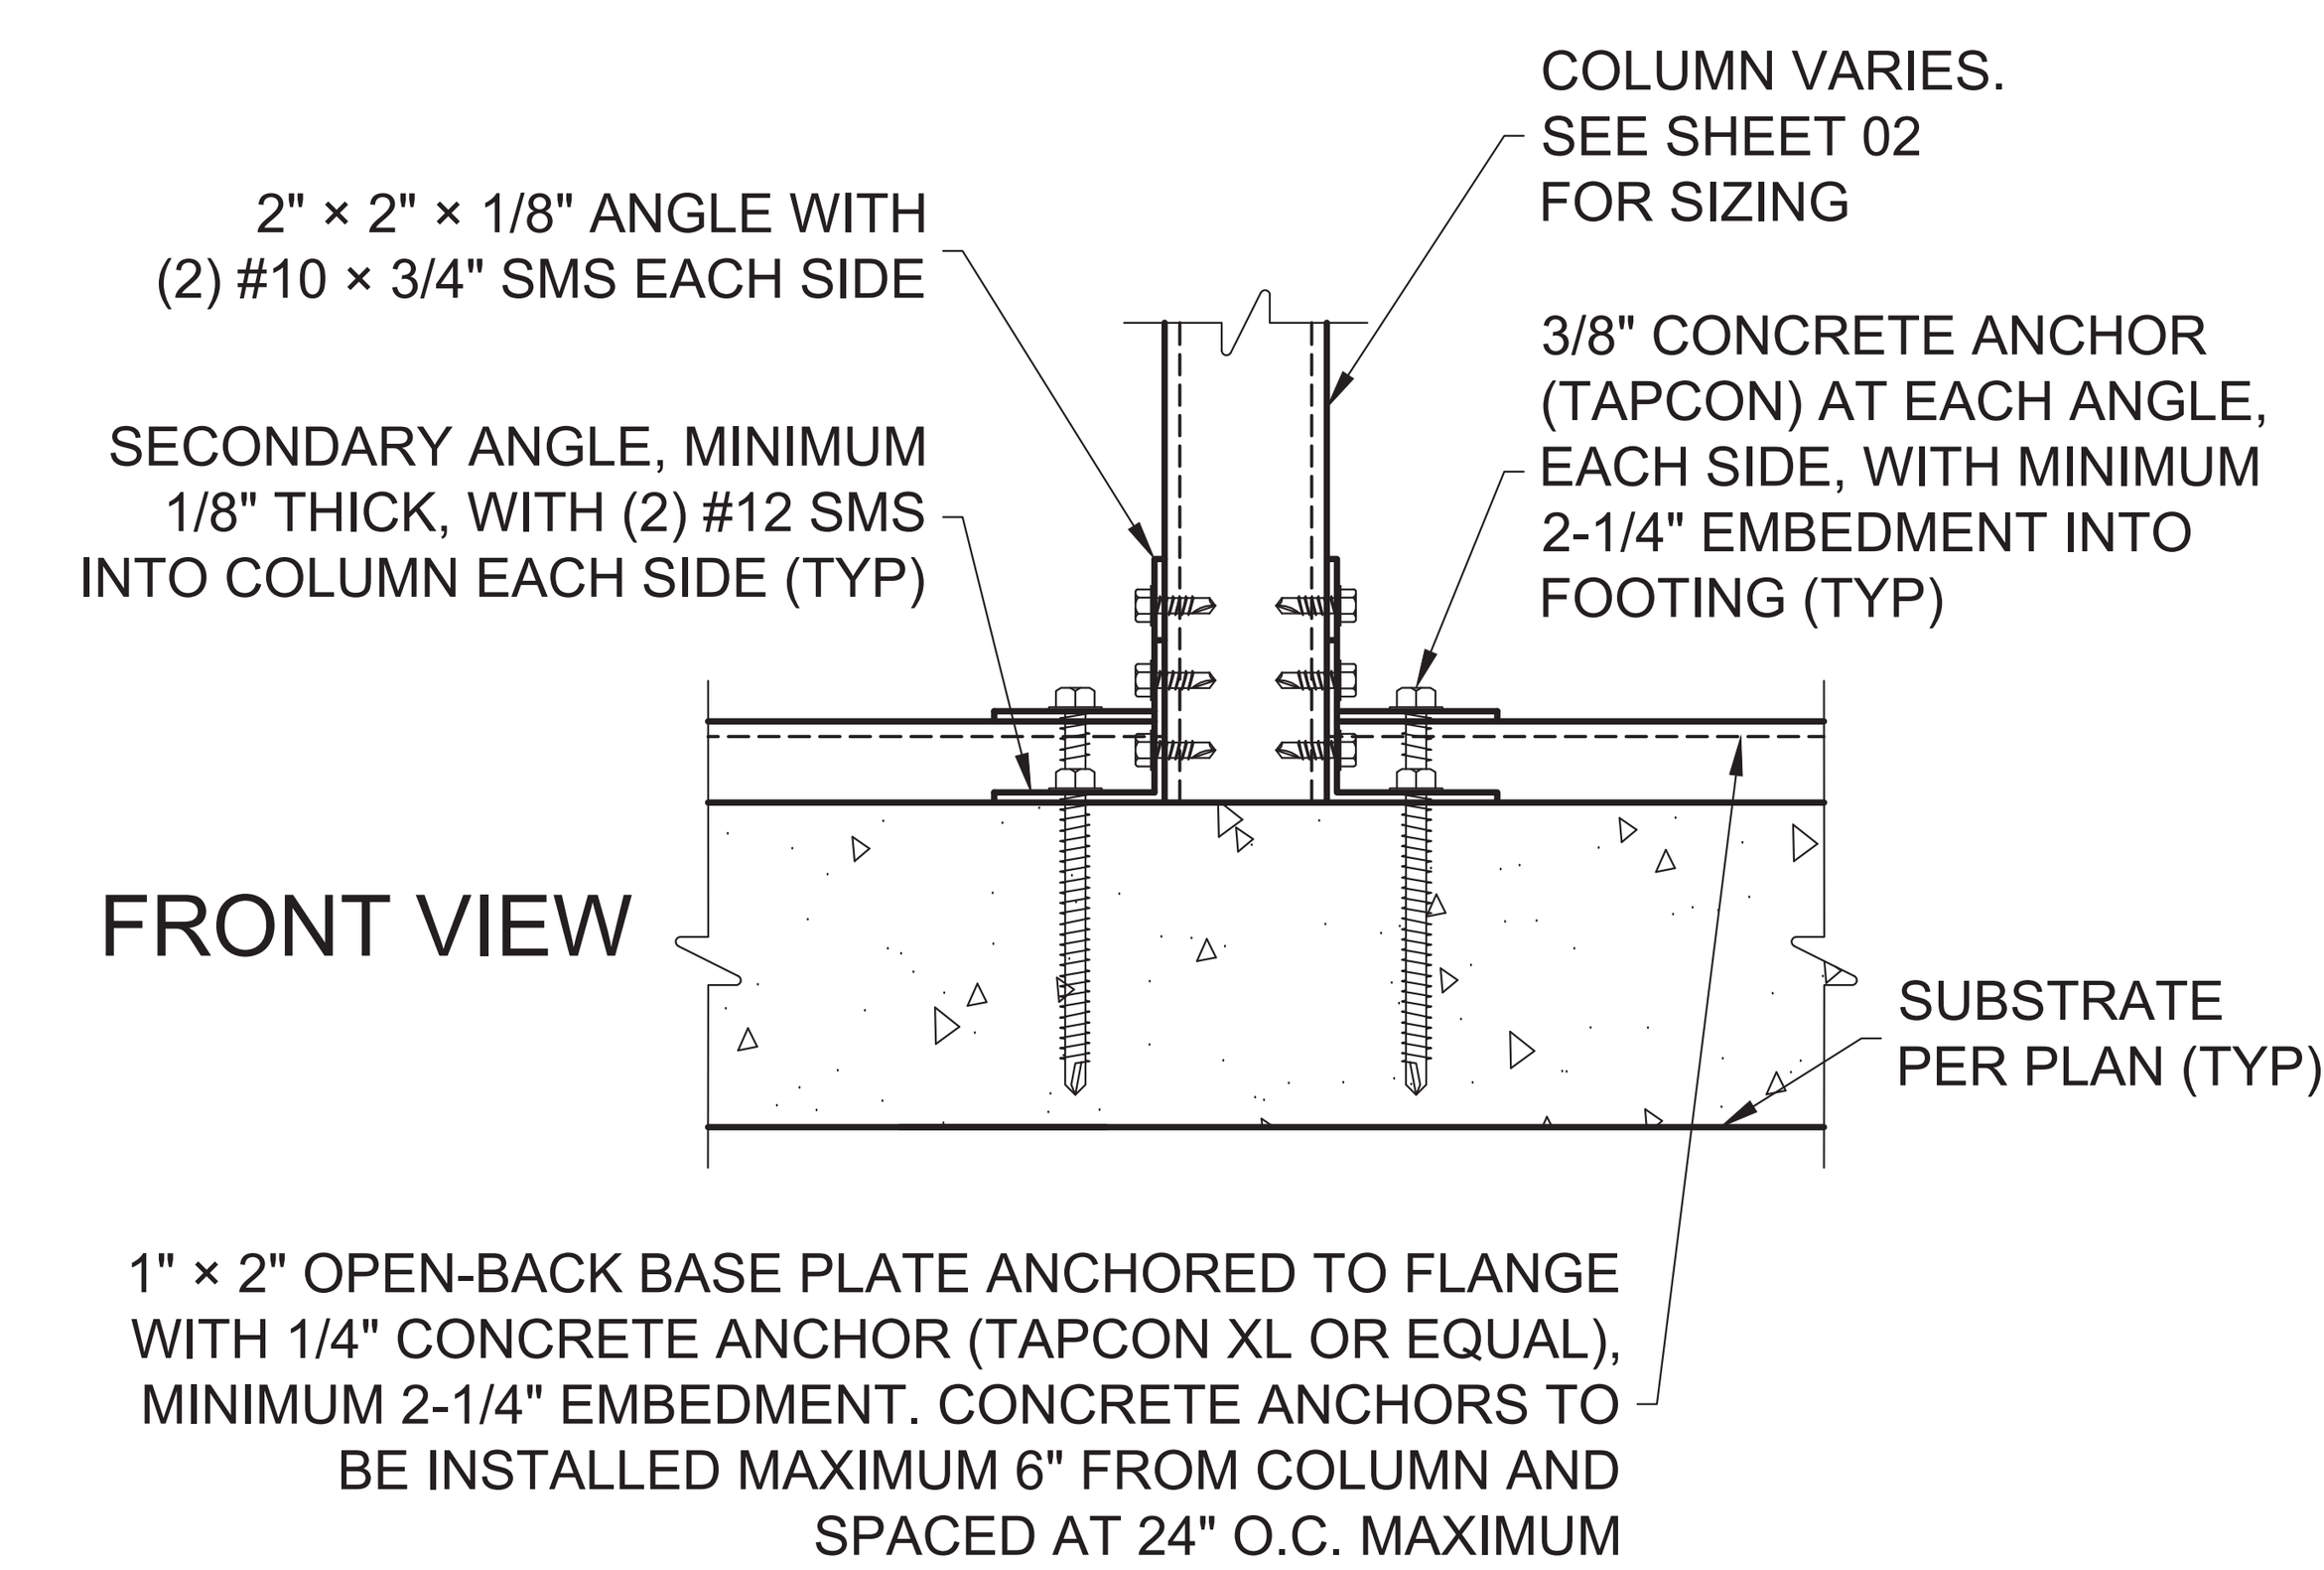

COLUMN TO FND CONNECTION FOR 2 × 4 OR LARGER
SCALE: N.T.S.

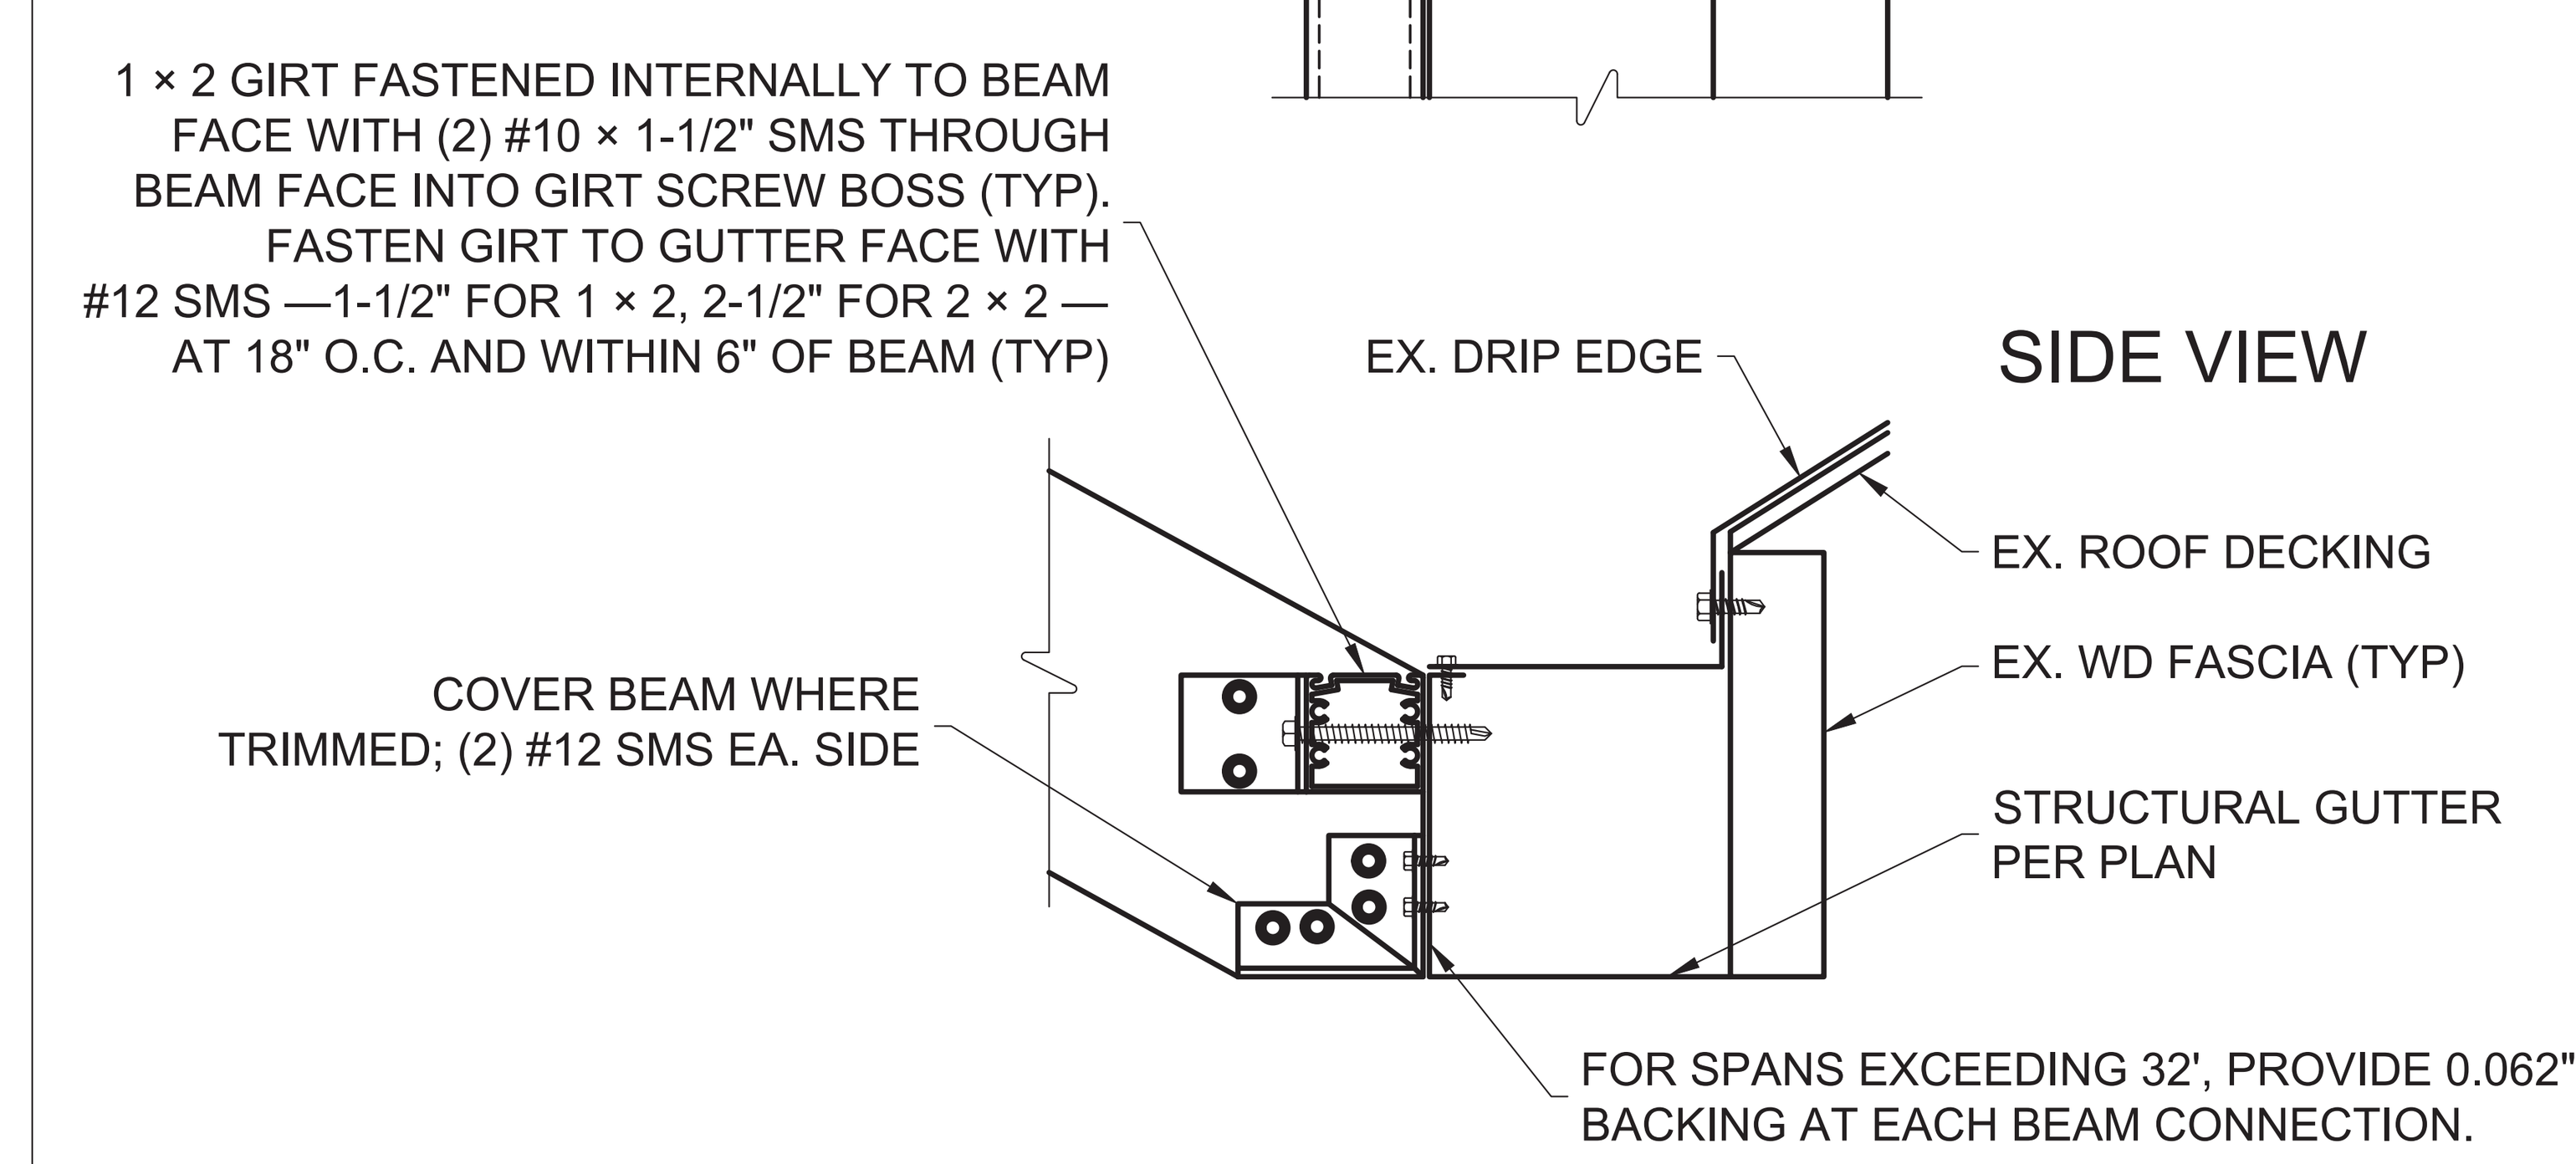

1. FASCIA TO BE FASTENED TO RAFTER TAIL USING (1) 1/4" Ø × 4" LAG SCREW.
2. 7" GUTTER PERMITTED WITH STRAP LENGTH INCREASED BY 2".

BEAM TO GUTTER CONNECTION
SCALE: N.T.S.

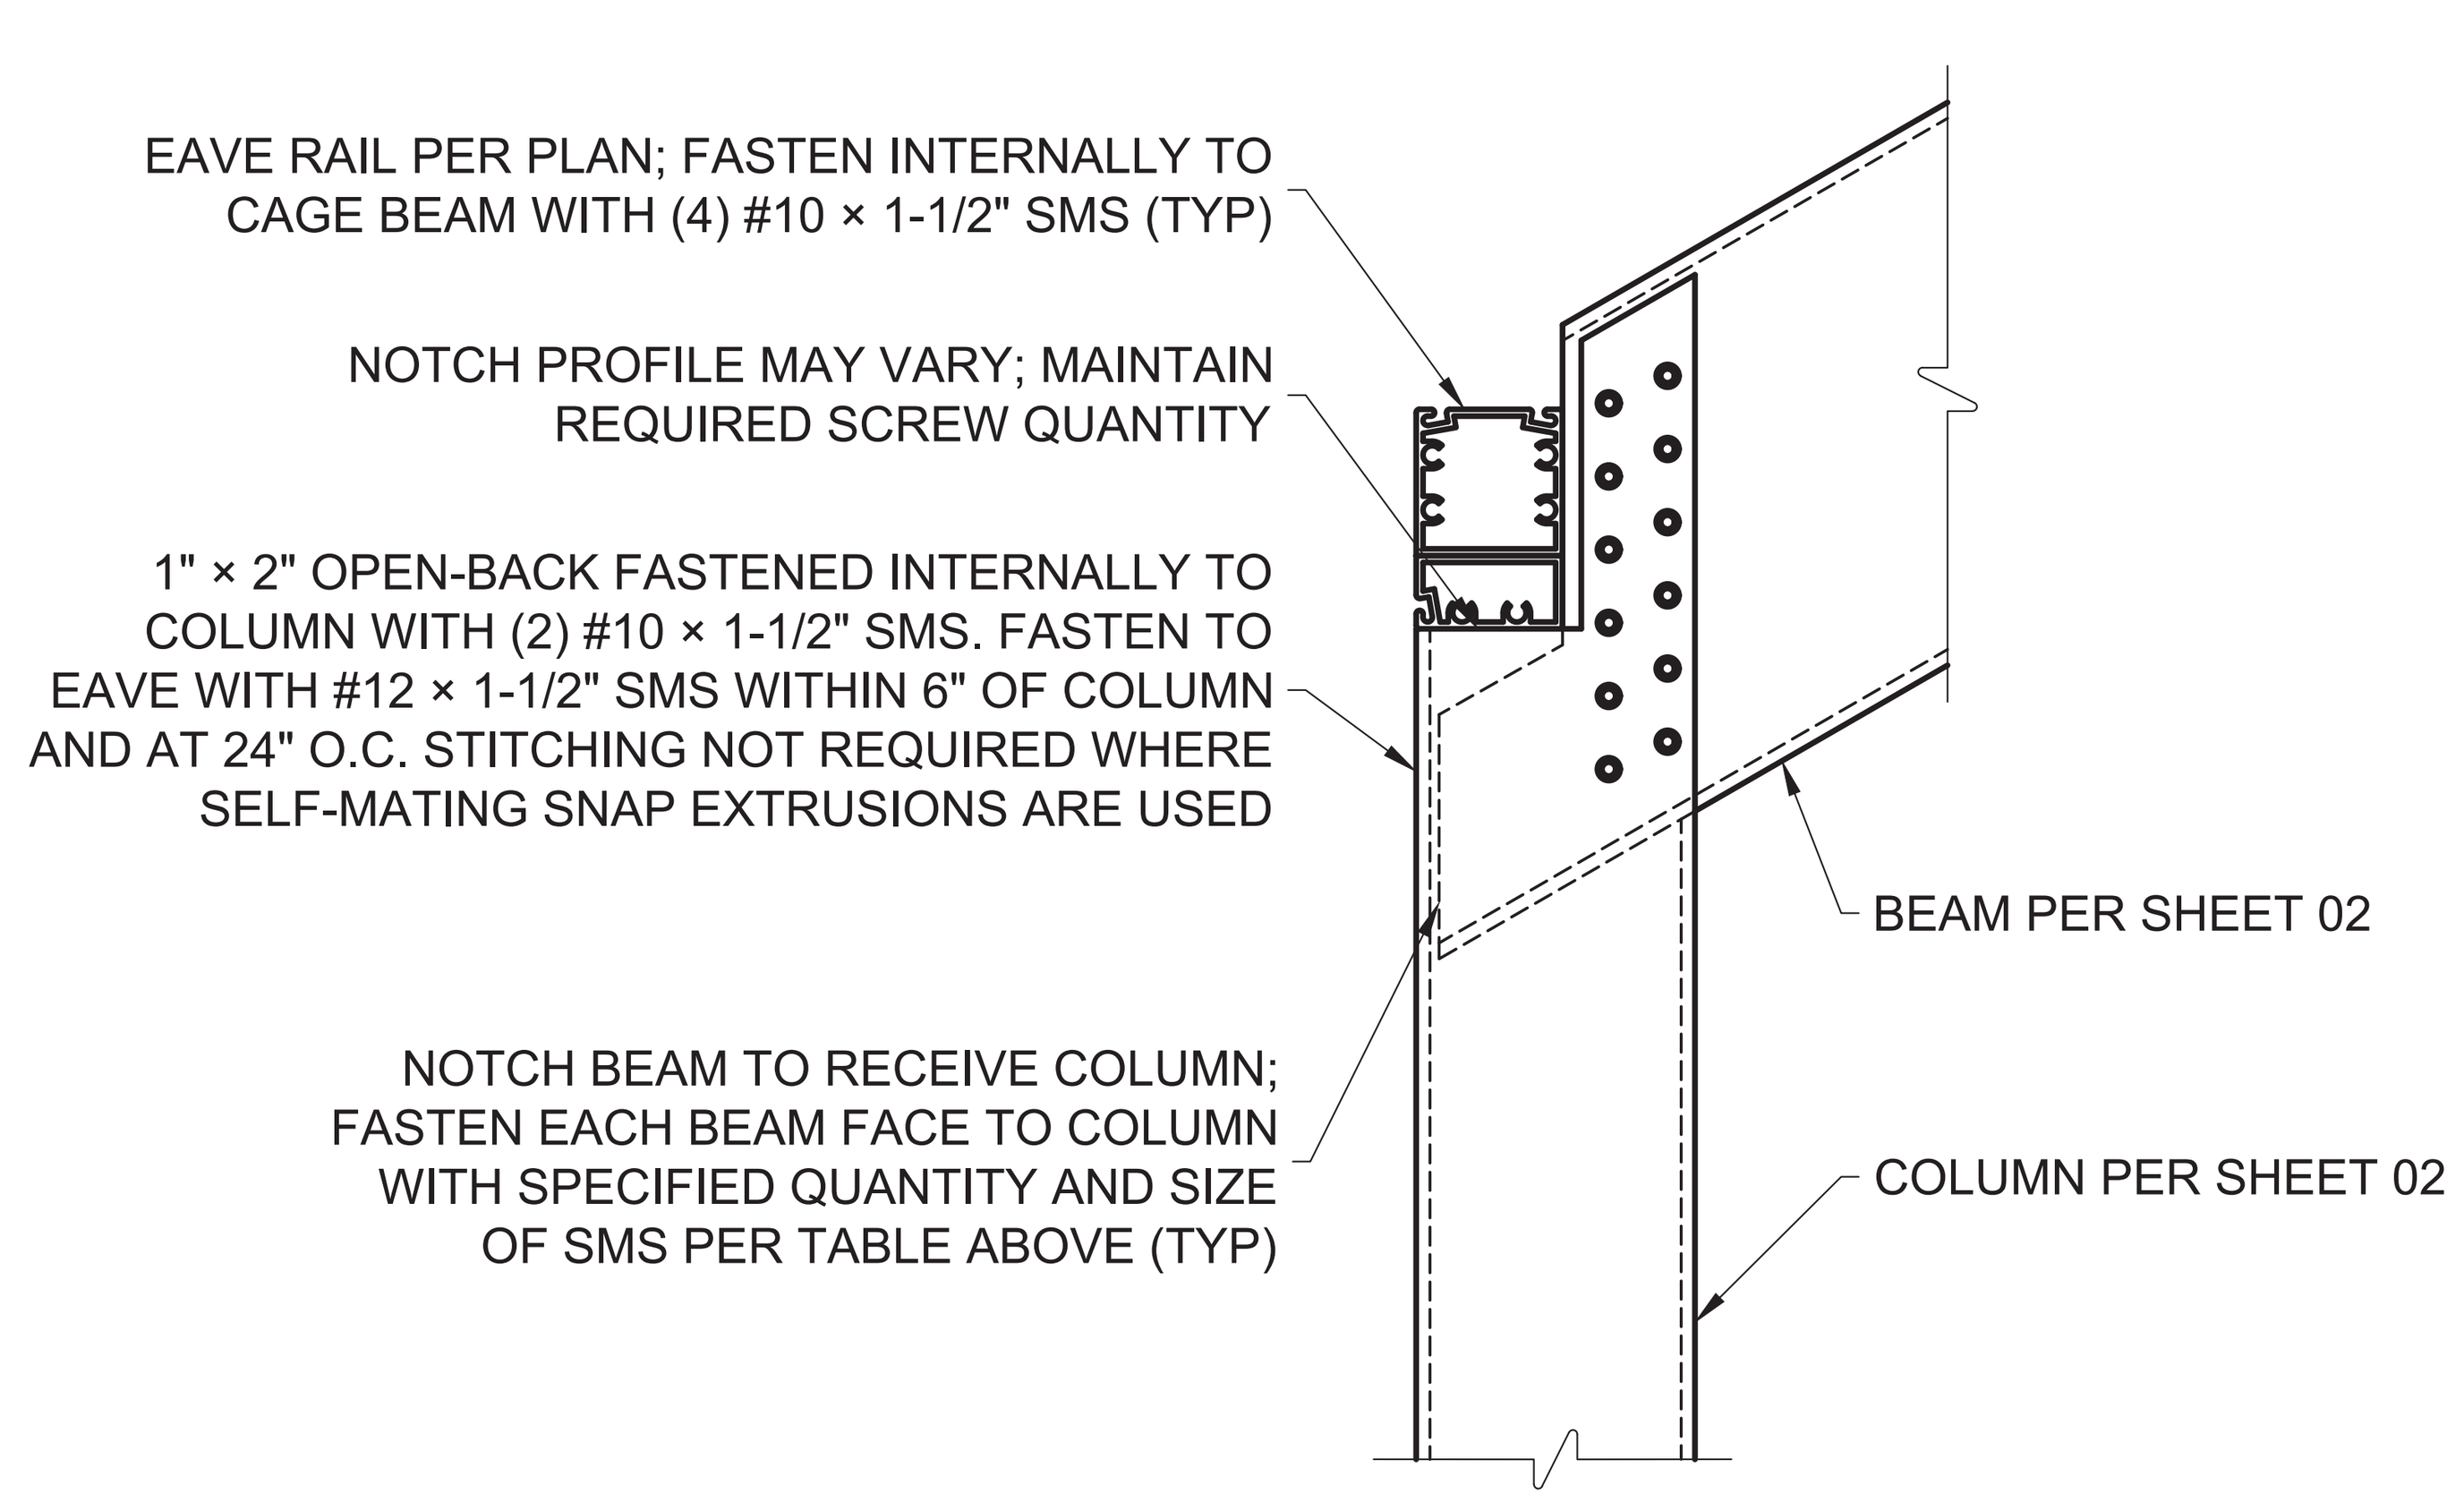

BEAM SIZE	QTY-SIZE SMS/SIDE
2X4 SMB	4 - #10
2X5 SMB	4 - #10
2X6 SMB	4 - #10
2X7 SMB	6 - #10
2X8 SMB	6 - #10
2X9 SMB	6 - #10
2X10 SMB	6 - #10
3X4 RMC	4 - #10
3X5 RMC	4 - #10
3X6 RMC	4 - #10
3X7 RMC	6 - #10
3X8 RMC	6 - #10
3X9 RMC	6 - #10
3X10 RMC	6 - #10
3X11 RMC	6 - #10
4X10 RMC	6 - #10

COLUMN TO BEAM CONNECTION
SCALE: N.T.S.

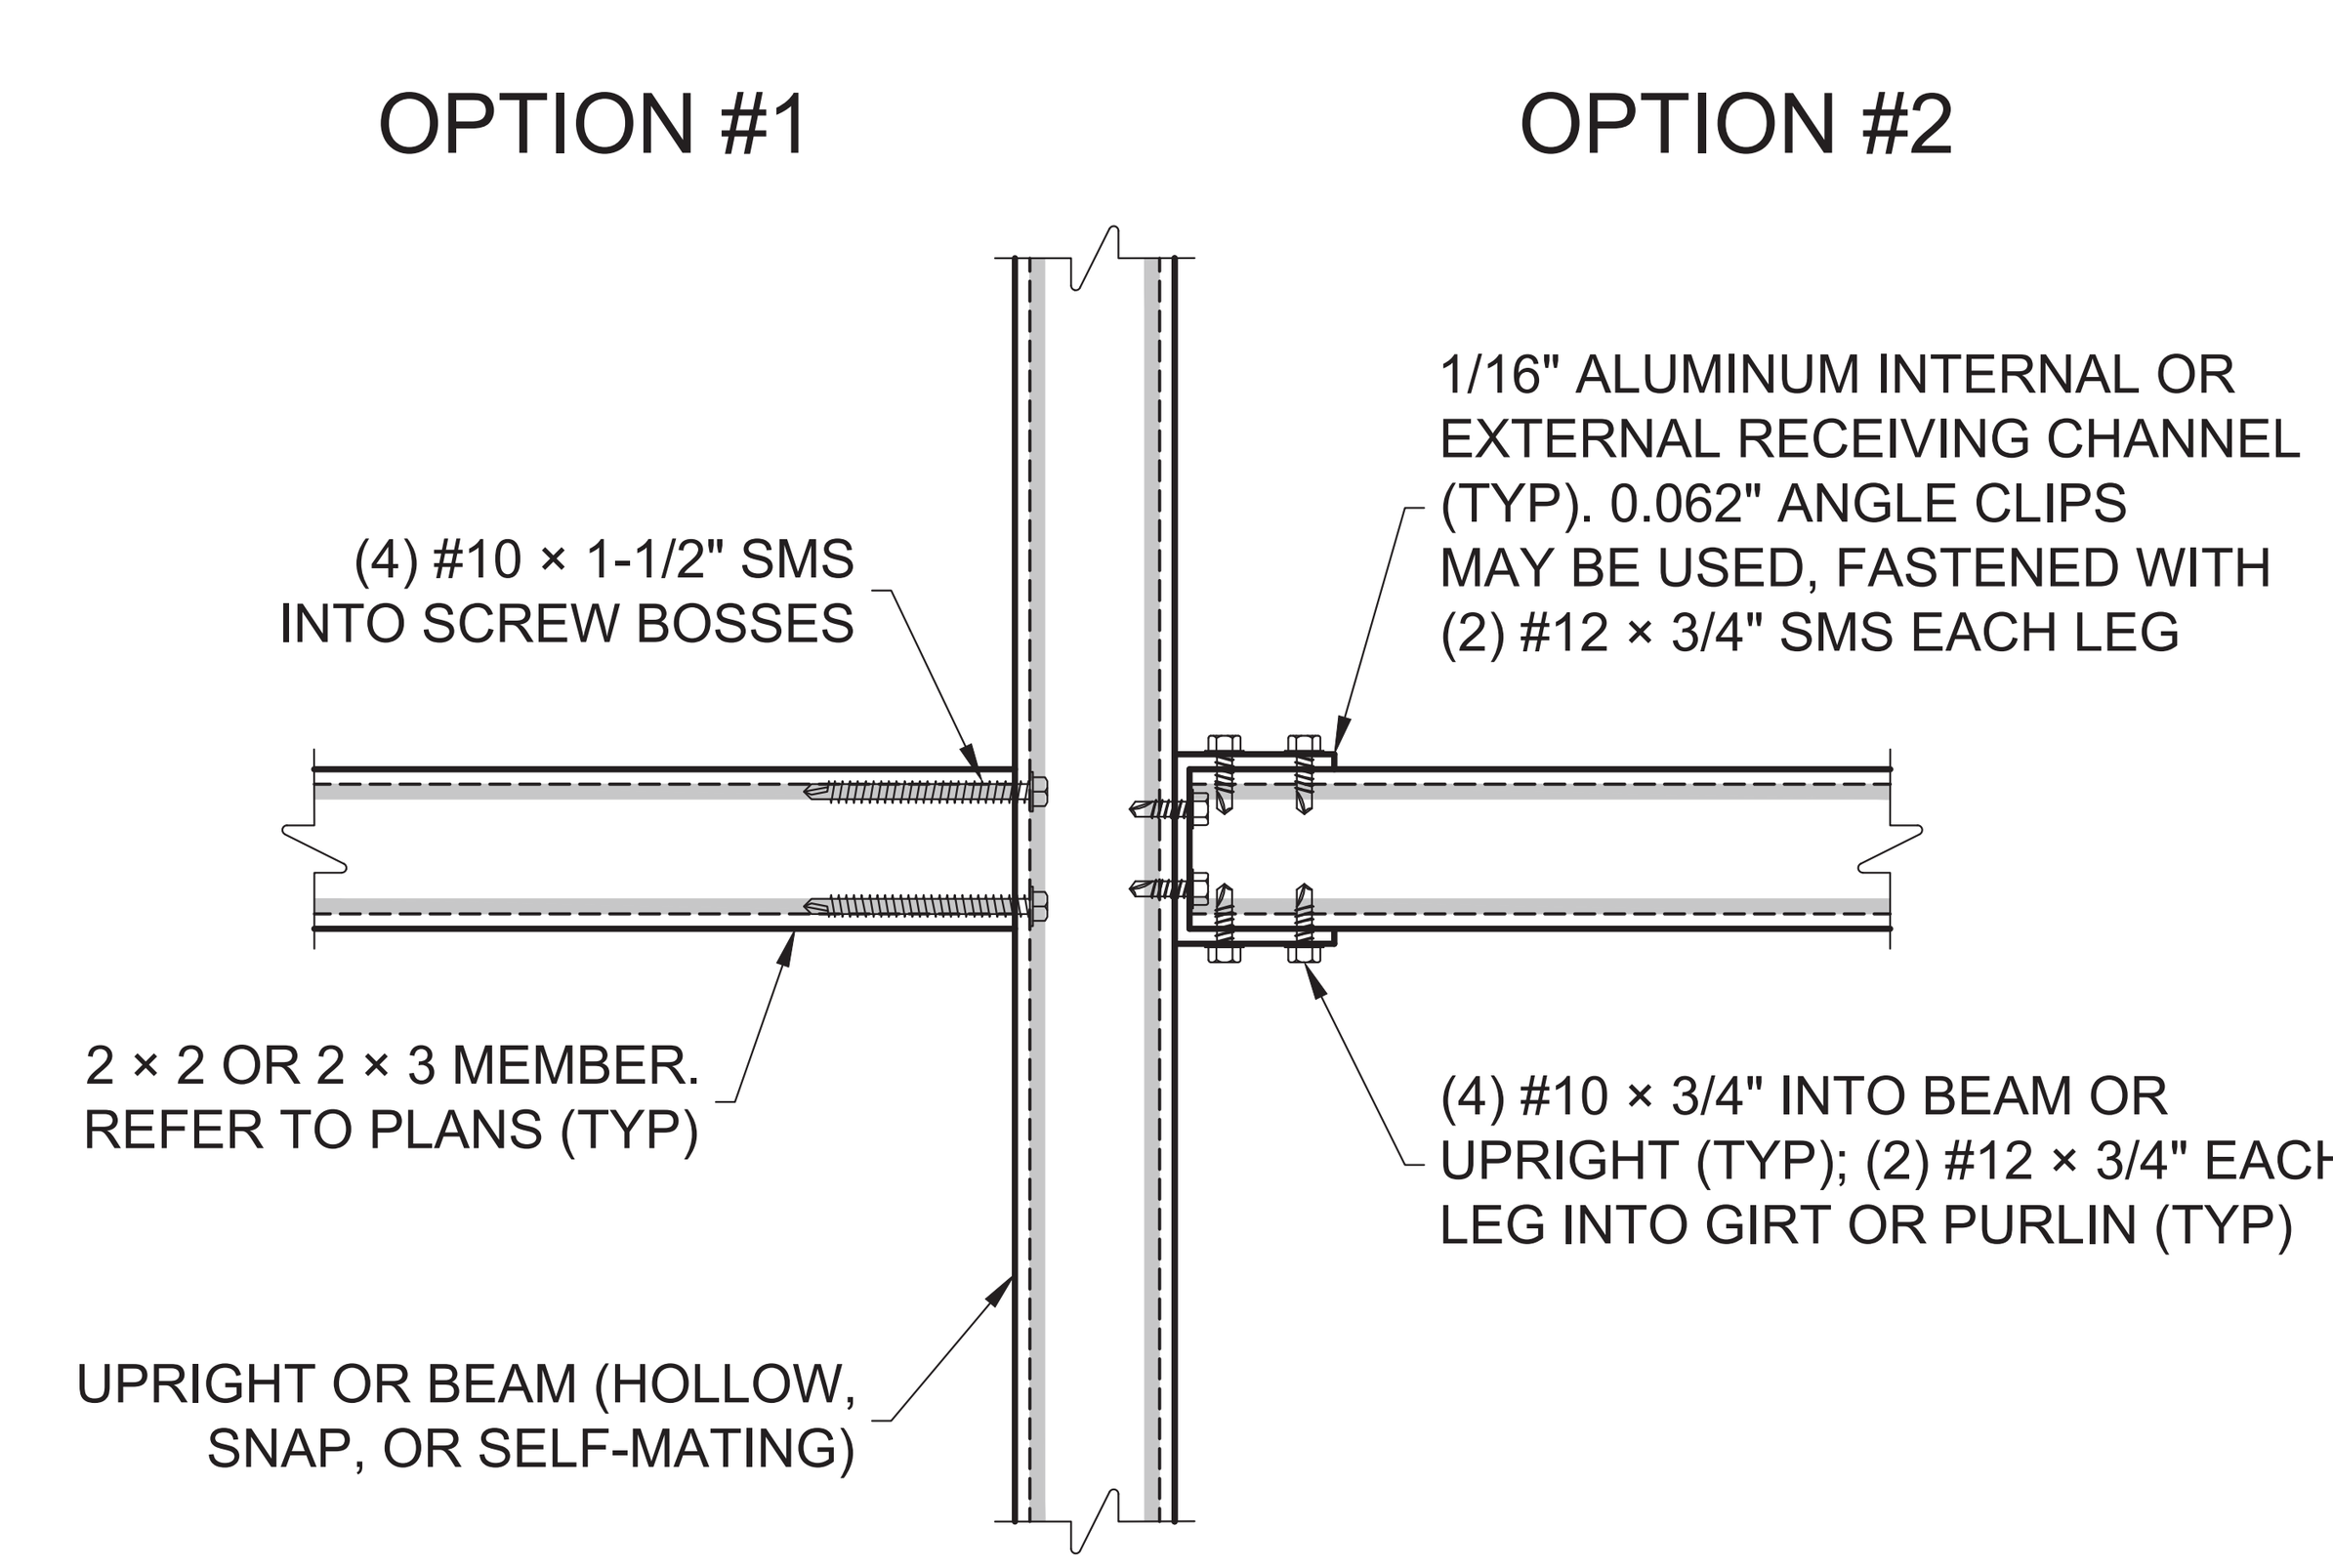

BEAM/POST TO GIRT/PURLIN CONNECTION
SCALE: N.T.S.

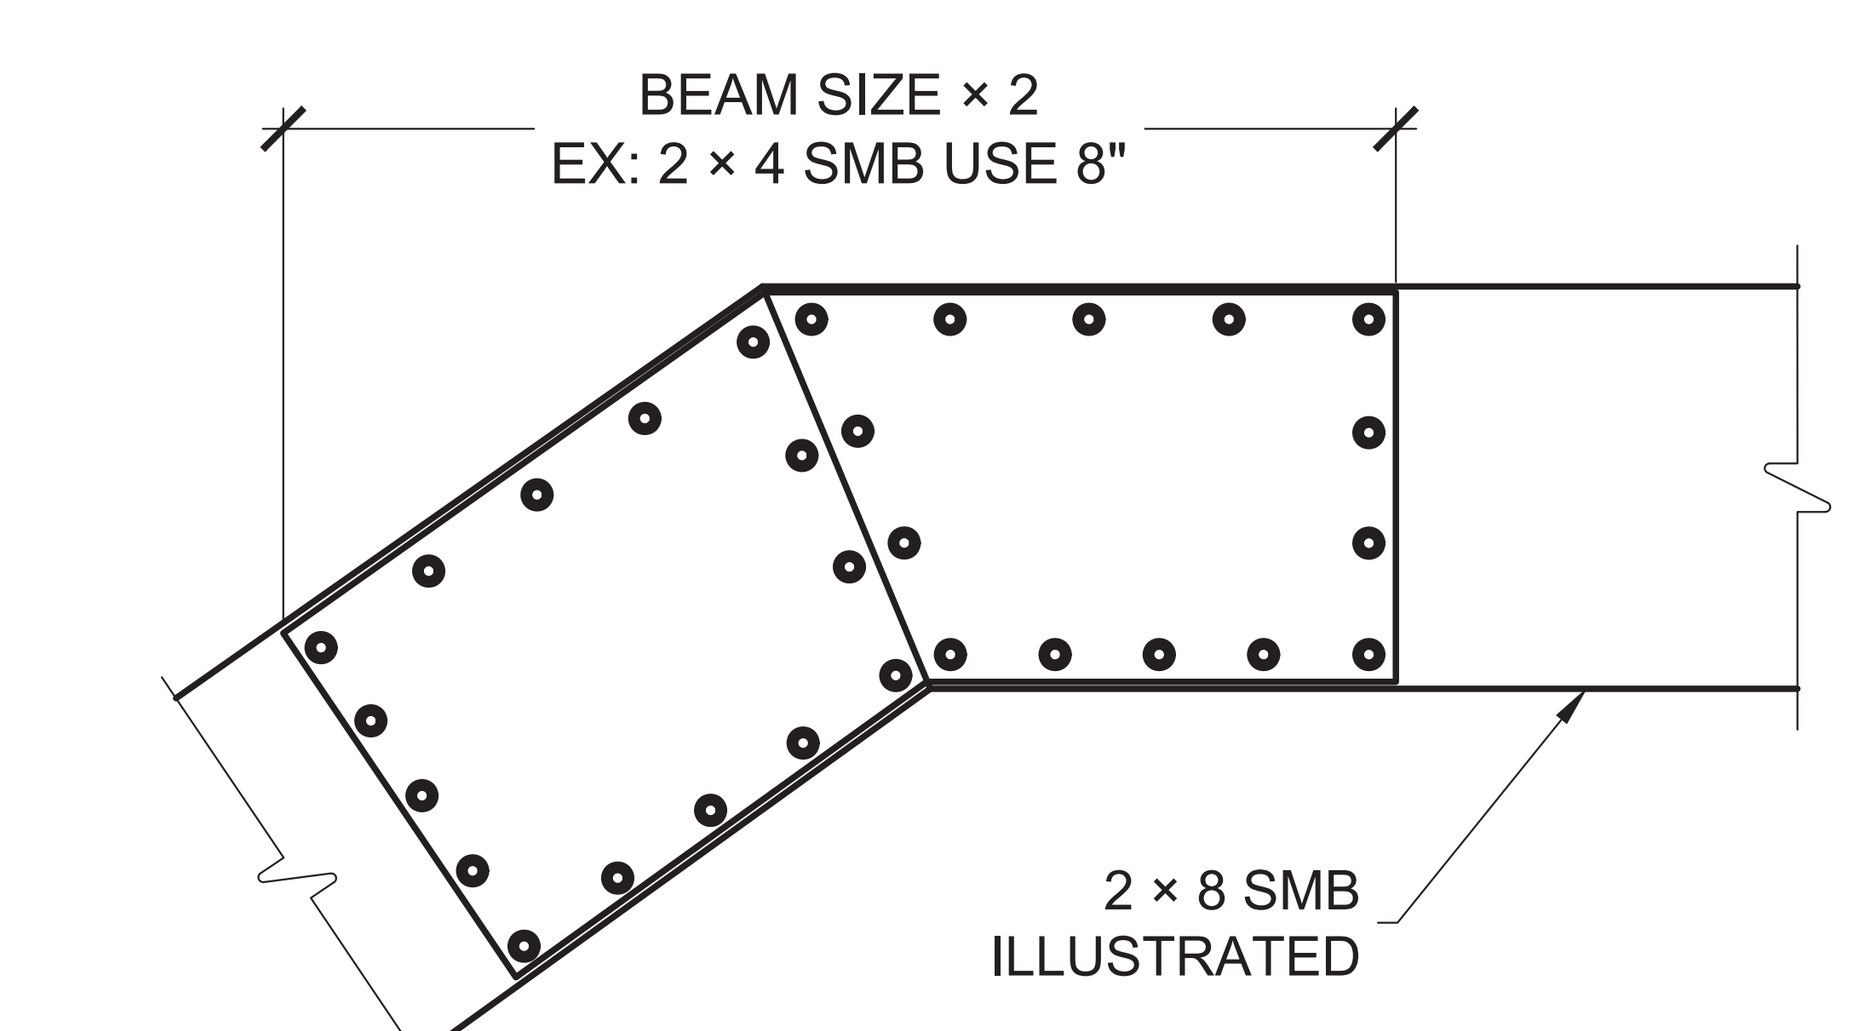



GUSSET CONNECTION
SCALE: N.T.S.

BEAM SIZE	QUANTITY OF #12 SMS PER BEAM FACE/SIDE/TOTAL FOR CONNECTION	QUANTITY OF #14 SMS PER BEAM FACE/SIDE/TOTAL FOR CONNECTION
2X4 SMB	9/18/36	
2X5 SMB	9/18/36	
2X6 SMB	9/18/36	
2X7 SMB	10/20/40	
2X8 SMB		12/24/48
2X9 SMB		12/24/48
2X9H SMB		12/24/48
2X10 SMB		13/26/52
3X4 RMC	9/18/36	
3X5 RMC	9/18/36	
3X6 RMC	9/18/36	
3X7 RMC	10/20/40	
3X8 RMC		12/24/48
3X9 RMC		12/24/48
3X10 RMC		13/26/52
3X11 RMC		13/26/52
4X10 RMC		13/26/52

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	5/28/2026

NOTICE:

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 5/28/2026

SHEET: 3

DRAWING TITLE: DETAILS 1

PROJECT NAME: HODGES, MICHAEL

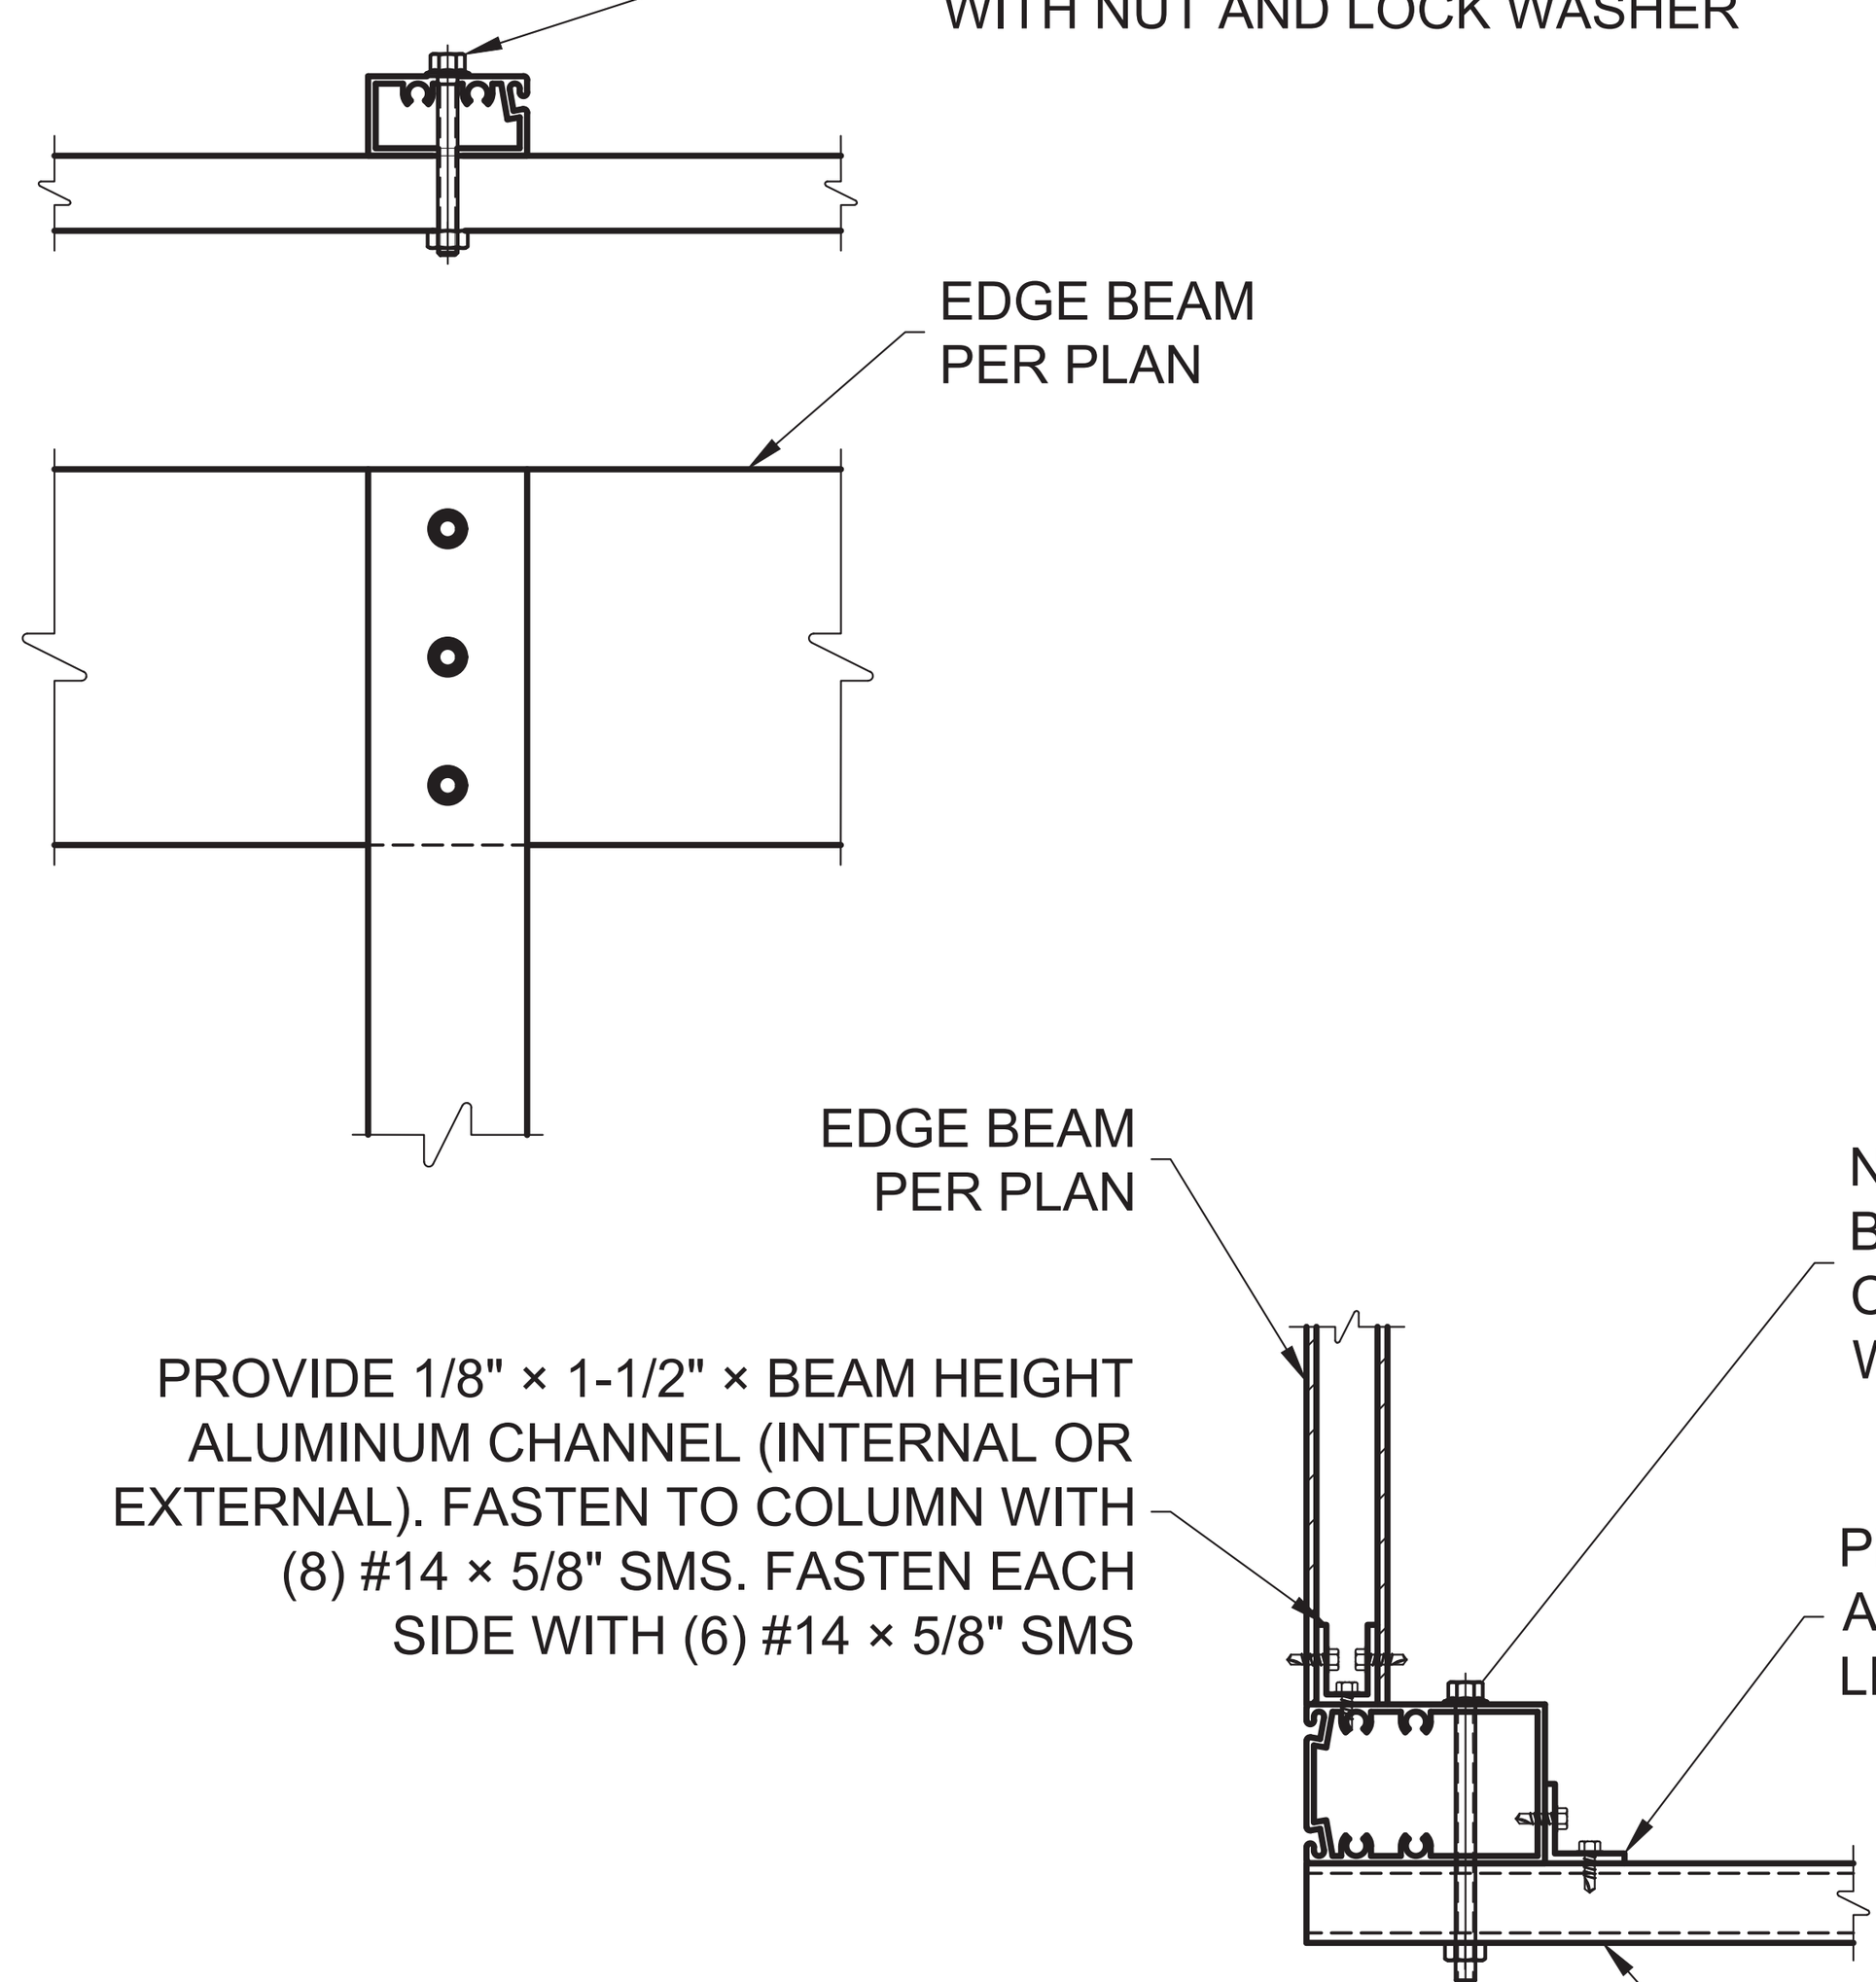

BEAM TO COLUMN CONNECTION
SCALE: N.T.S.

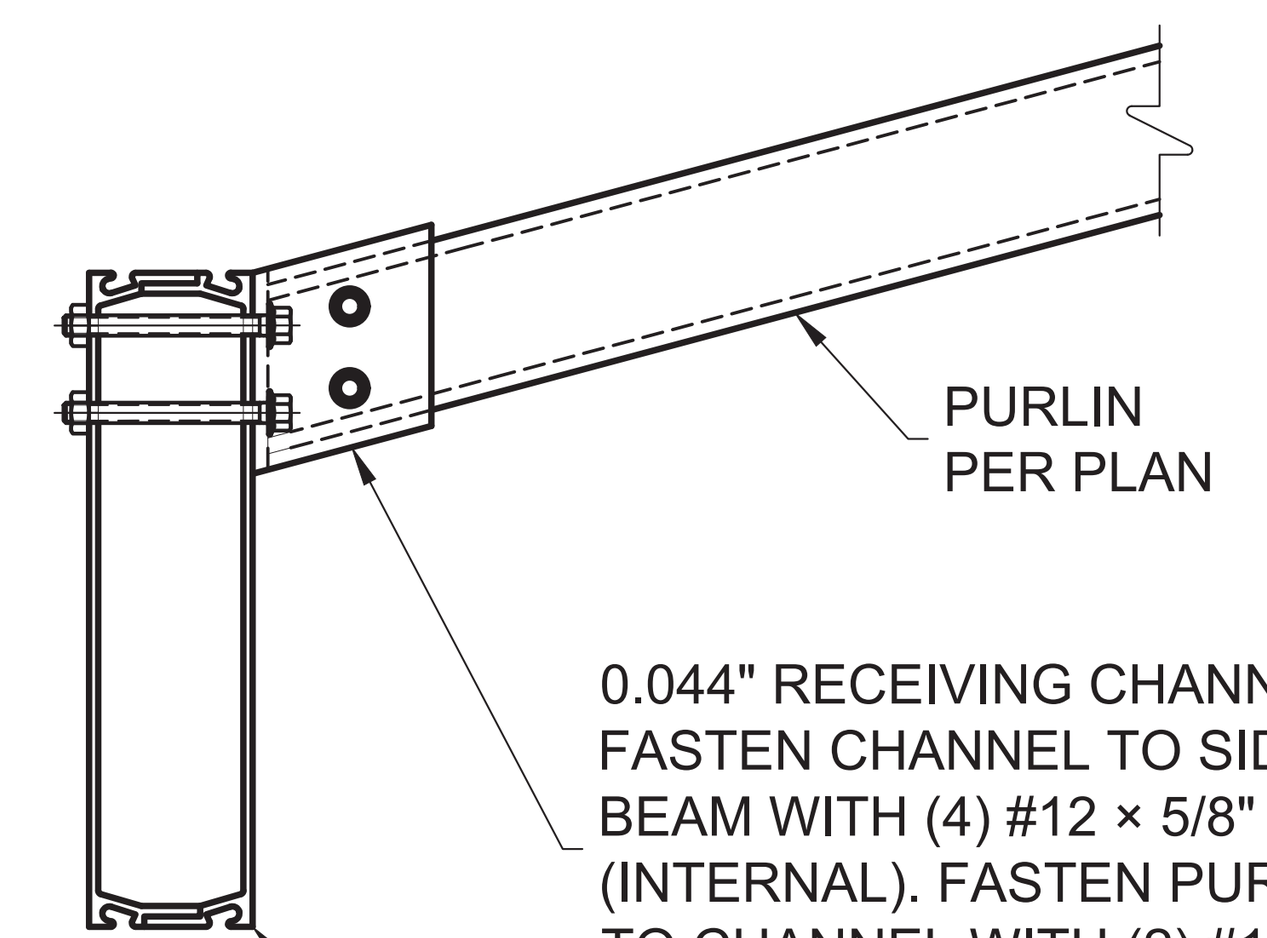

PURLIN TO EDGE BEAM DETAIL
SCALE: N.T.S.

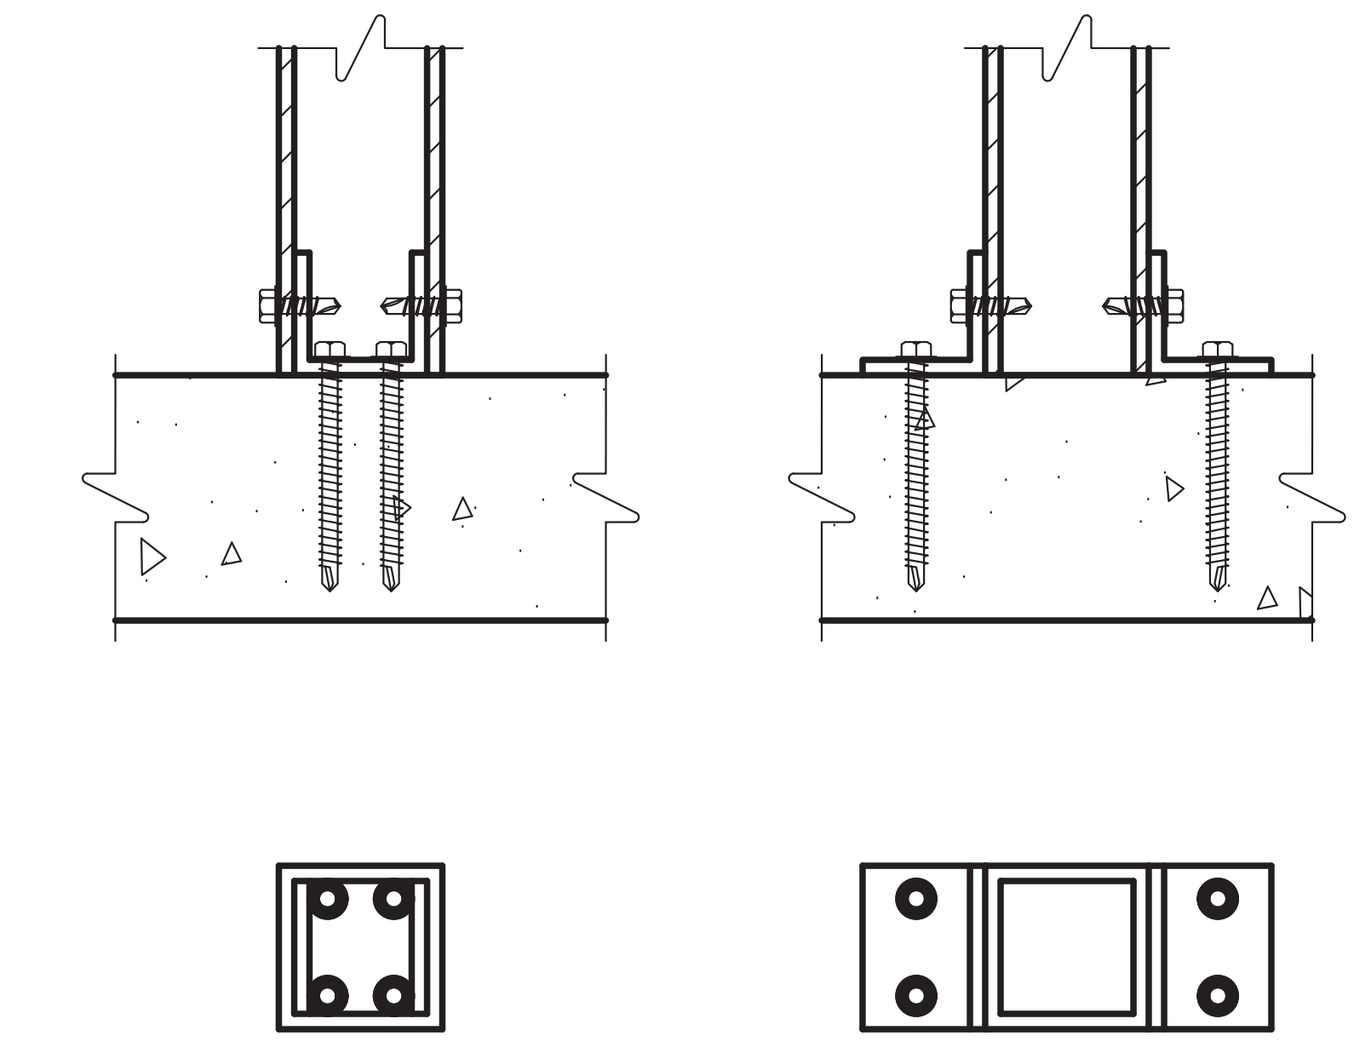

POST BASE CONNECTION
SCALE: N.T.S.

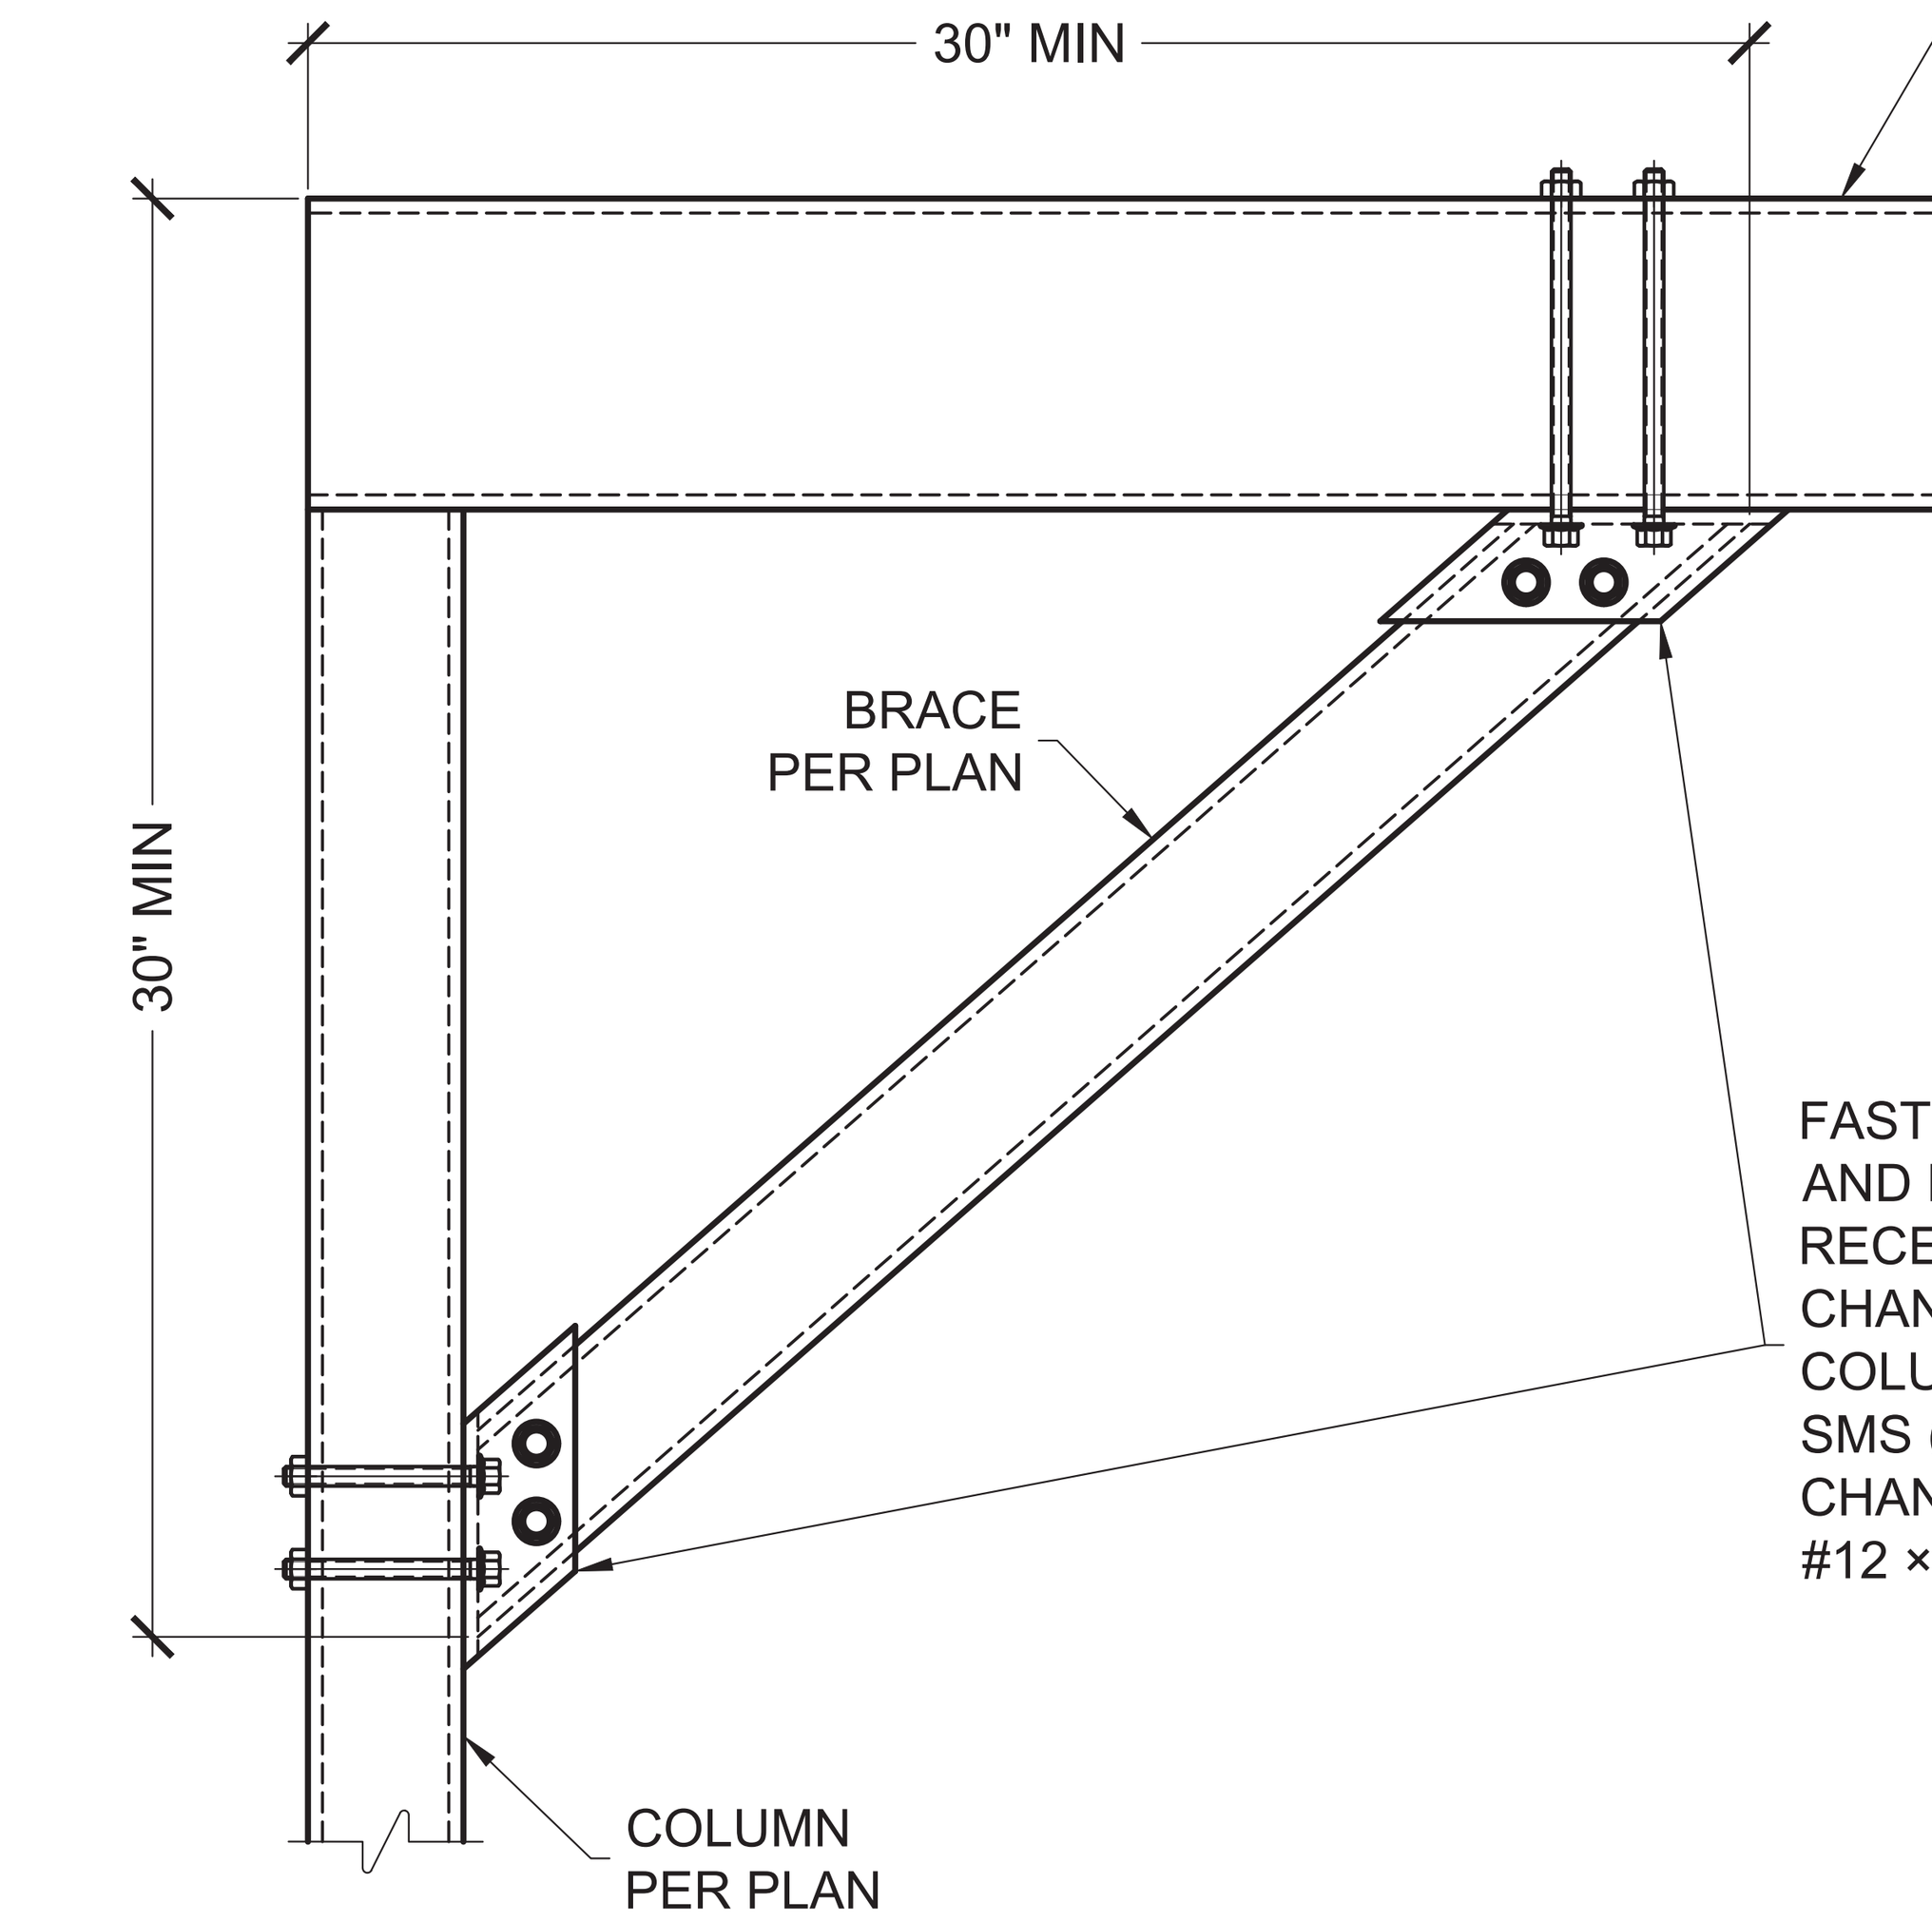

K-BRACE DETAIL
SCALE: N.T.S.

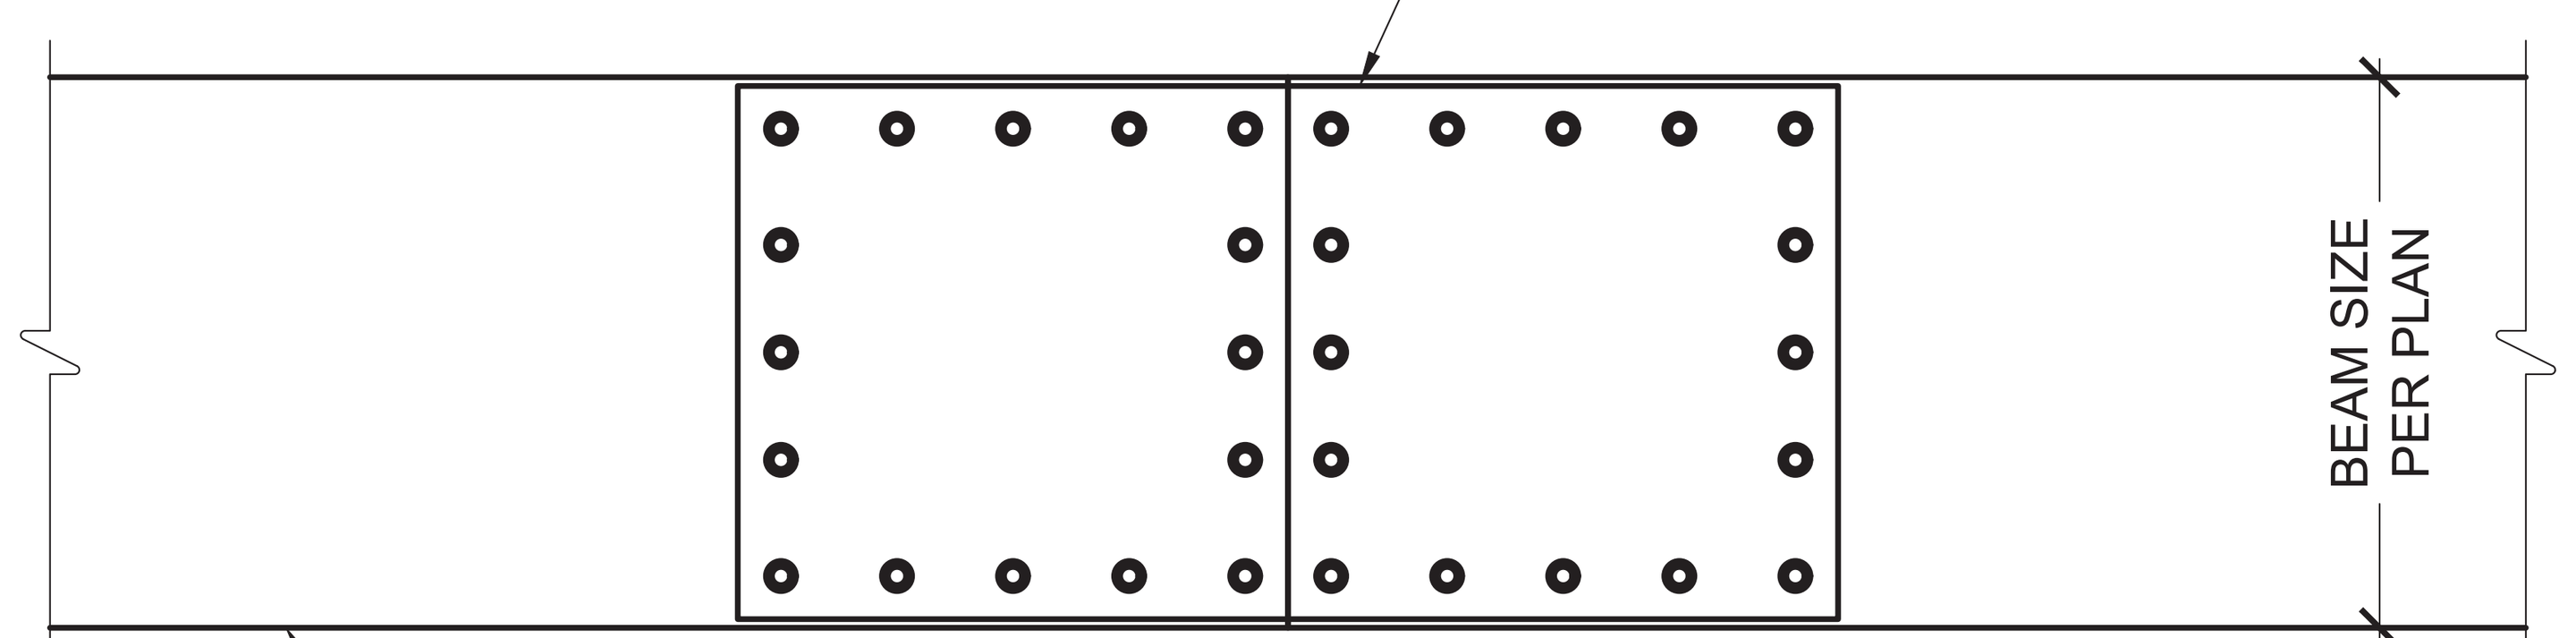

MAINTAIN FASTENER EDGE DISTANCE OF 5/8" AND MINIMUM 3/8" SEPARATION BETWEEN FASTENERS. INSTALL FASTENERS AROUND THE PERIMETER OF THE CONNECTION FIRST, THEN COMPLETE THE REMAINDER IN THE FIELD.

FASTENER QUANTITY TABLE		
BEAM SIZE	FASTENER SIZE	QTY PER FACE/SIDE/TOTAL
2X4 SMB	#12	6 / 12 / 24
2X5 SMB	#12	6 / 12 / 24
2X6 SMB	#12	10 / 20 / 40
2X7 SMB	#12	12 / 24 / 48
2X8 SMB	#14	12 / 24 / 48
2X9 SMB	#14	18 / 36 / 72
2X10 SMB	#14	18 / 36 / 72
3X4 RMC	#12	6 / 12 / 24
3X5 RMC	#12	6 / 12 / 24
3X6 RMC	#12	10 / 20 / 40
3X7 RMC	#12	12 / 24 / 48
3X8 RMC	#14	12 / 24 / 48
3X9 RMC	#14	18 / 36 / 72
3X10 RMC	#14	18 / 36 / 72
3X11 RMC	#14	18 / 36 / 72
4X10 RMC	#14	18 / 36 / 72

1. BEAM SPLICE LENGTH TO BE 2 × BEAM HEIGHT.
2. LOCATE BEAM SPLICE AT 1/3 POINTS, STAGGERED AT EACH END OF BEAM.
3. PROVIDE MINIMUM 1° CAMBER IN BEAM TO REDUCE SELF-WEIGHT DEFLECTION.

BEAM SPLICE DETAIL
SCALE: N.T.S.

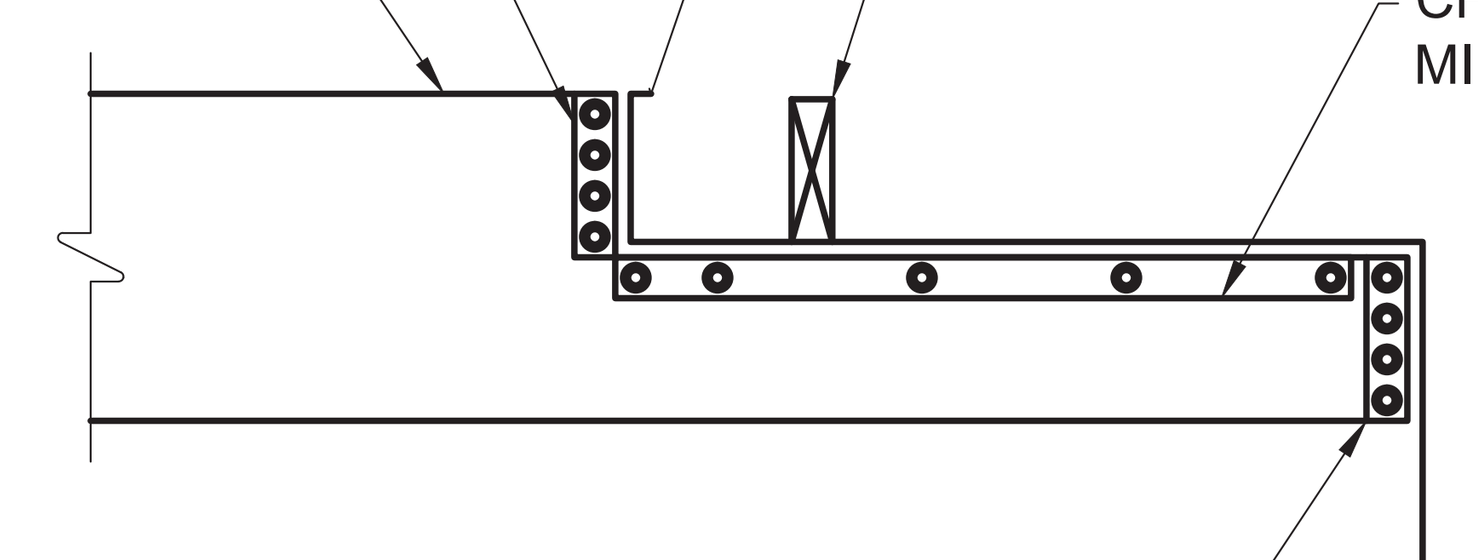

1. FASCIA TO BE FASTENED TO RAFTER TAIL USING (1) 1/4" Ø × 4" LAG SCREW.
2. A 7" GUTTER MAY BE USED, PROVIDED STRAP LENGTH IS INCREASED BY 2".

BEAM UNDER OVERHANG DETAIL
SCALE: N.T.S.

TOP VIEW

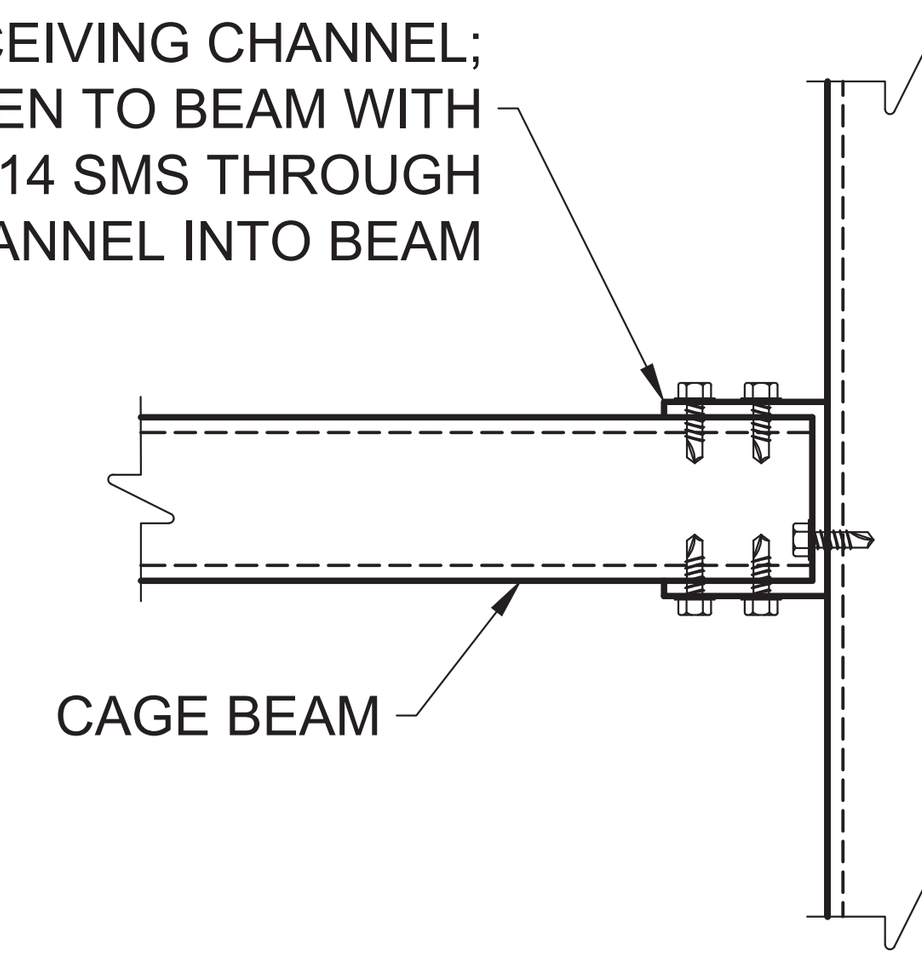

SIDE VIEW

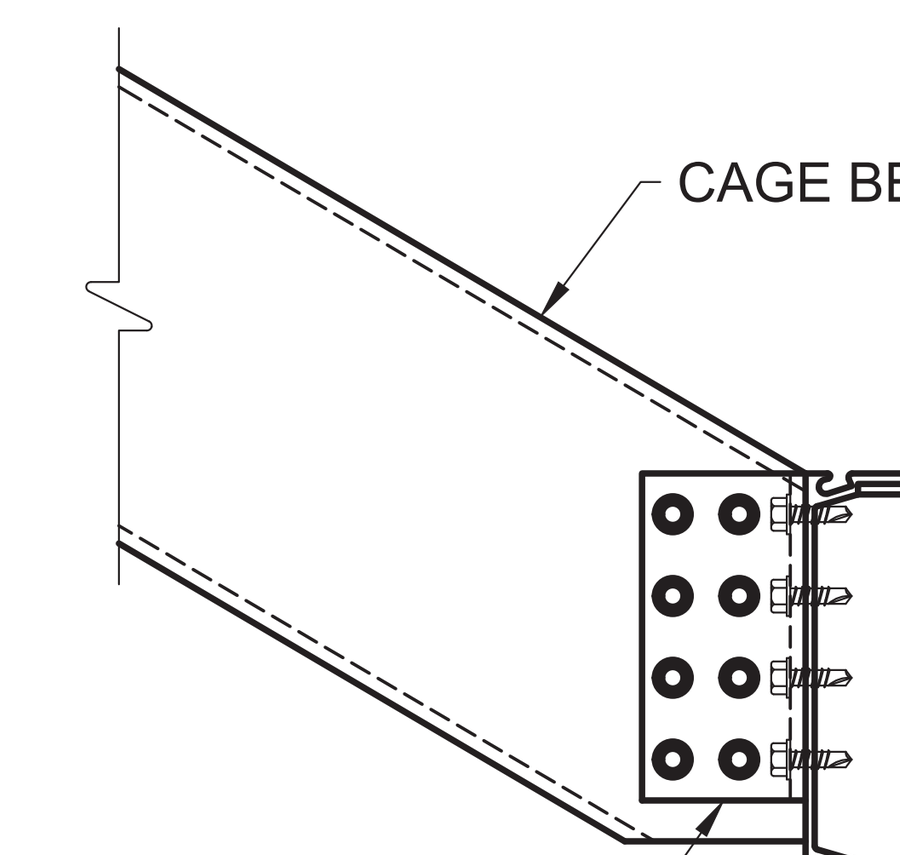

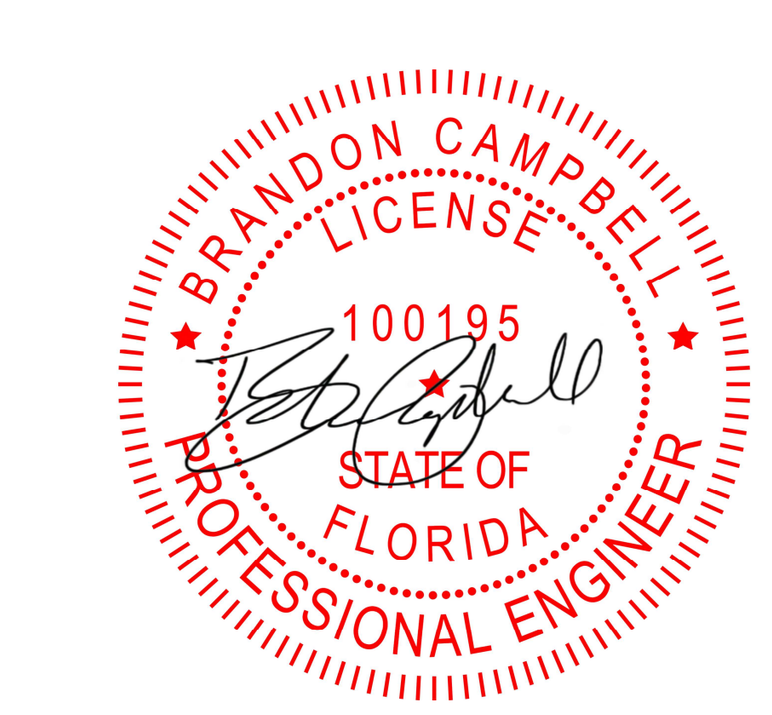

BEAM TO EDGE BEAM DETAIL
SCALE: N.T.S.

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	5/28/2026

NOTICE:

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 5/28/2026

SHEET: 4

DRAWING TITLE: DETAILS CONT.

PROJECT NAME: HODGES, MICHAEL

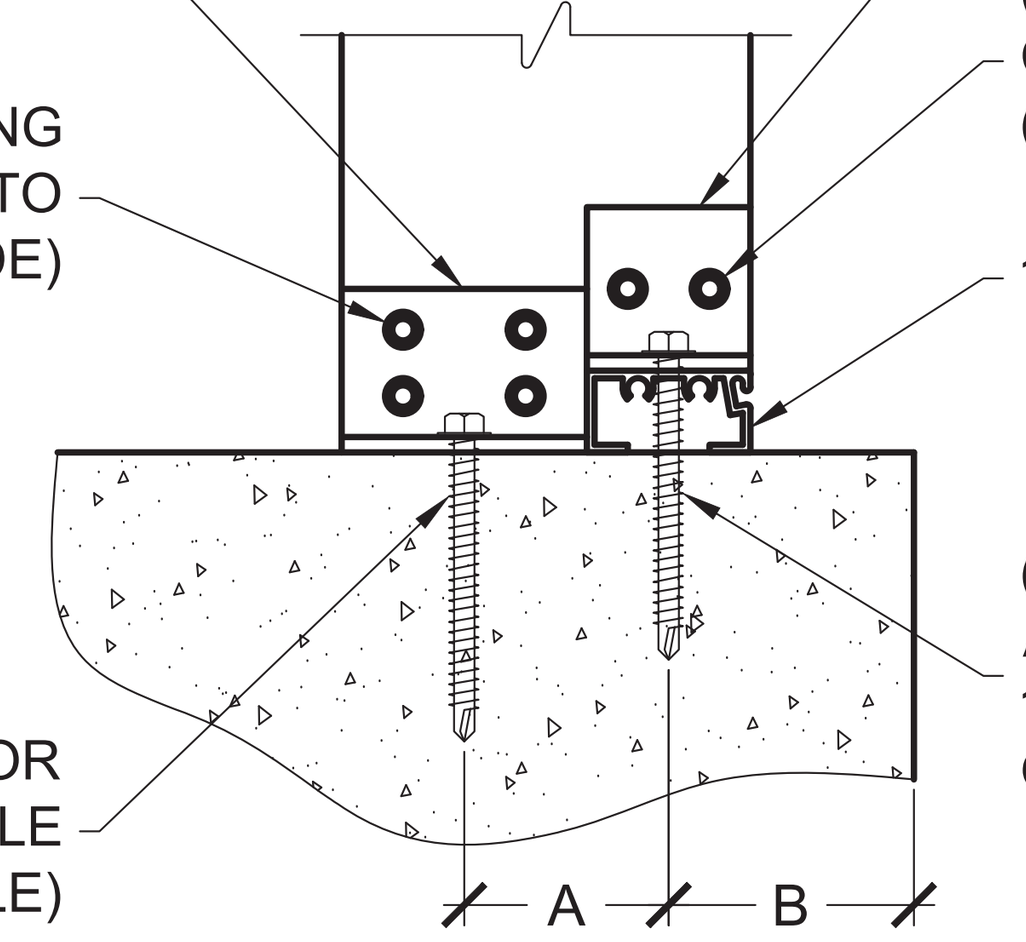

A = ANCHOR MIN SPACING (TYP) (SEE TABLE)
B = 3" MIN CONC. EDGEDISTANCE (TYP)

NOTES:
1. NUMBER OF ANCHORS "B" IS EACH SIDE INTO THE SECONDARY ANGLE AND DOES NOT INCLUDE THE ANCHOR INTO THE 1 × 2.
2. MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
3. CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON THOSE LISTED ON S-1, D. FASTENERS, OTHER BRAND & TYPE SHALL BE APPROVED BY ENGINEER.
4. 2 × 3 W/ 1 × 2 CORNER POST SHALL REQUIRE SAME BASE CONNECTIONS AS 2 × 4 SHOWN IN TABLE.
5. IF FOR AN IN-FILL, TOP OF COLUMN CONNECTION SIMILAR IF CONCRETE LINTEL.
6. IF WOOD LINTEL/DECK, DOUBLE LEDGE REQUIRED (MIN. 3-5 8") MAY SUBSTITUTE LAG SCREW FOR LDT FOR BOTH PRIMARY & SECONDARY ANGLES.
7. 2 × 2 × .045 DOOR JAMB MEMBER SHALL CONNECT SIMILAR TO 2 × 3 MEMBER.

COLUMN SIZE	1/4" AND 3/8" Ø CONCRETE SCREW ANCHOR	
	"B"	MINIMUM SPACING
2X3 - 1/4"	0	0"
2X4 - 1/4"	1	3"
2X5 - 1/4"	1	3"
2X6 - 3/8"	1	4"
2X7 - 3/8"	1	5"
2X8 - 3/8"	2	3"
2X9 - 3/8"	2	4"
2X10 - 3/8"	2	4.5"
3X4 - 1/4"	1	3"
3X5 - 1/4"	1	3"
3X6 - 3/8"	1	4"
3X7 - 3/8"	1	5"
3X8 - 3/8"	2	3"
3X9 - 3/8"	2	4"
3X10 - 3/8"	2	4.5"
3X11 - 3/8"	2	4.5"
4X10 - 3/8"	2	4.5"

2" × 3" OR LARGER UPRIGHT TO CONCRETE W/WO PAVER
SCALE: N.T.S.

OPTION #1 OPTION #2

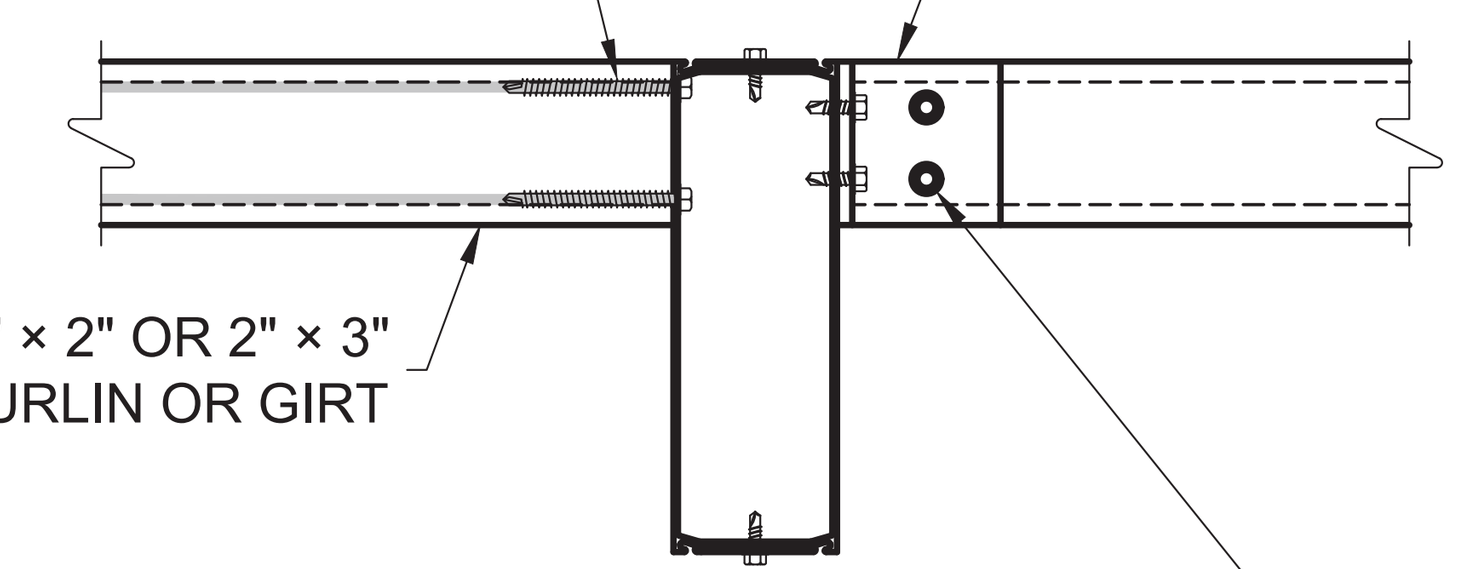

FOR RECEIVING CHANNEL: TOTAL (8) SCREWS
(2) #10 × 3/4" SMS (TYP) INTO GIRT/PURLIN &
(4) #10 × 3/4" SMS (TYP) INTO UPRIGHT/BEAM
FOR ANGLE: TOTAL (8) SCREWS
(2) #10 × 3/4" SMS (TYP) @ EA. LEG

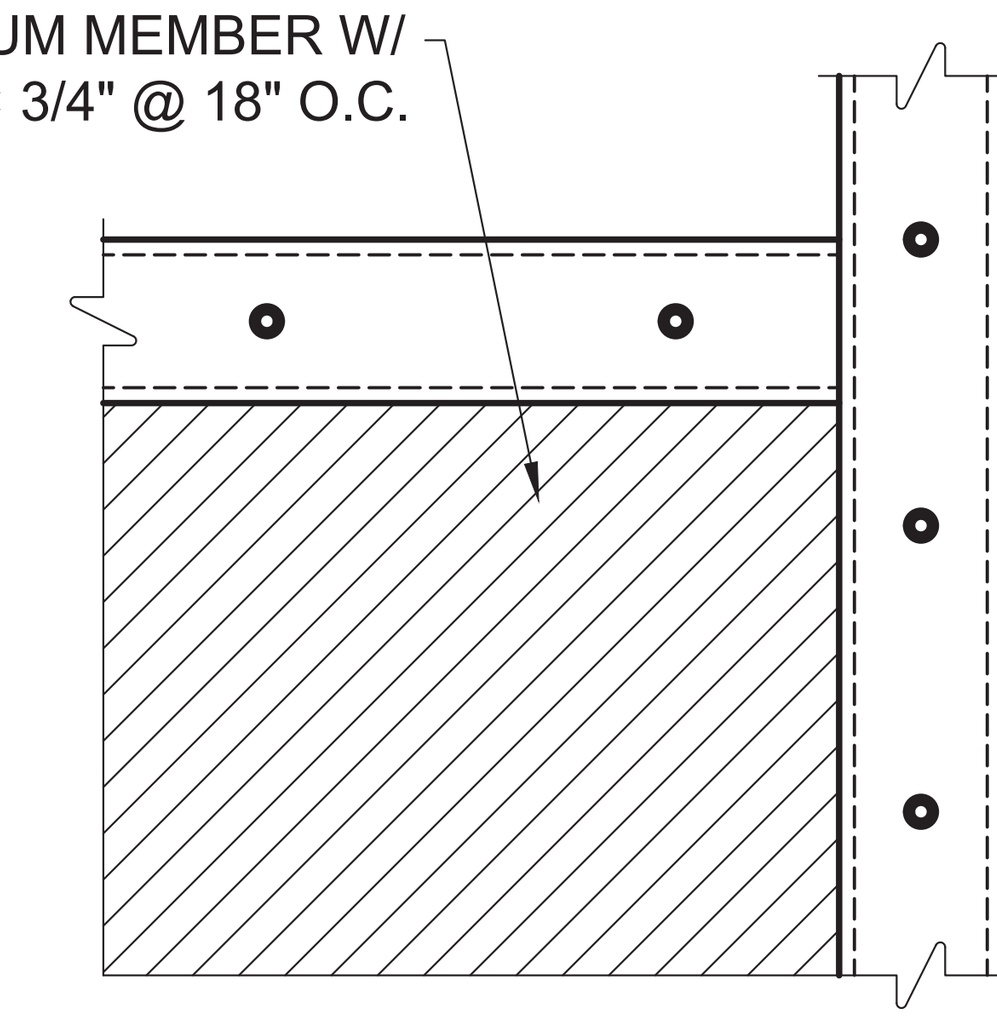

NOTES:
KICK PLATE TO BE APPLIED TO UPRIGHT CHAIRRAIL OR GIRT IF APPLICABLE

PURLIN OR GIRT TO BEAM OR POST DETAIL
SCALE: N.T.S.

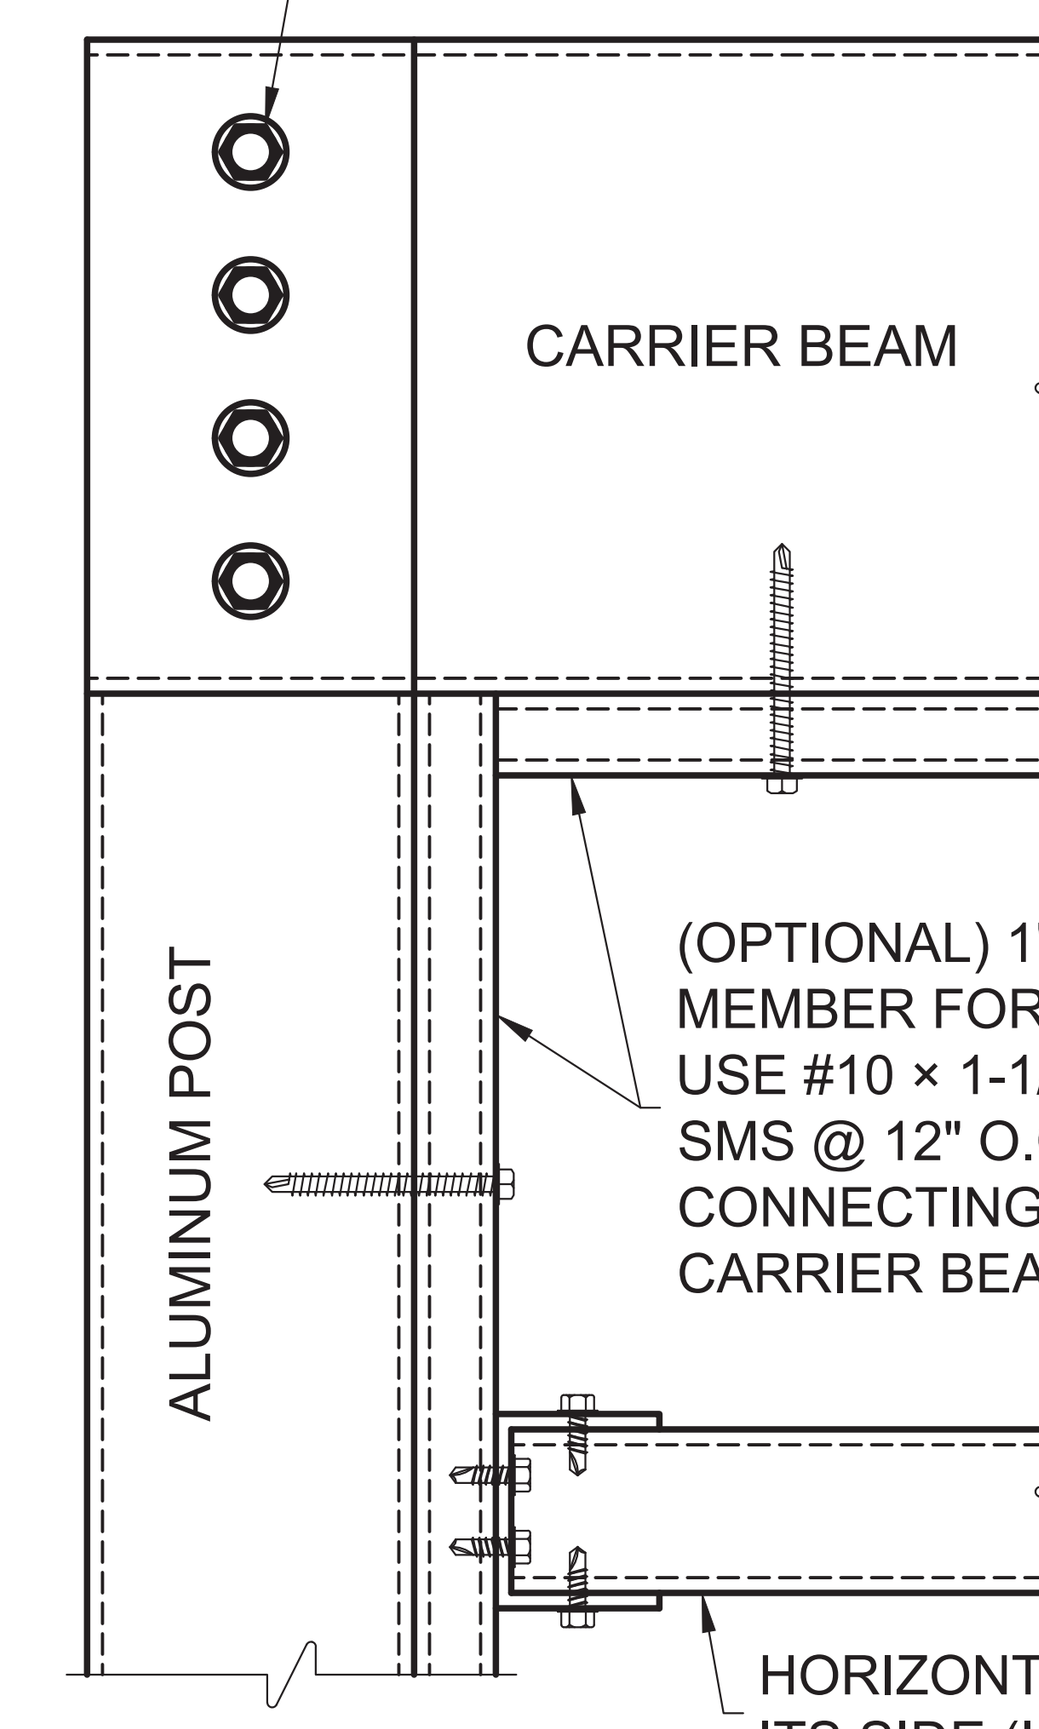

NOTES:
1. PERPENDICULAR CARRIER BEAM: USE 0.125" RECEIVING CHANNEL WHICH WILL CONNECT TO THE POST W/(4) 3/8" THRU BOLTS USED FOR THE PRIMARY CARRIER BEAM, THEN USE (3) 3/8"Ø MACHINE BOLTS W/ 3/4"Ø WASHERS TO ATTACH THE PERPENDICULAR CARRIER BEAM TO THE RECEIVING CHANNEL.
2. HORIZONTAL BEAM DETAIL WILL BE PROVIDED IF NEEDED.

BEAM TO POST DETAIL
SCALE: N.T.S.

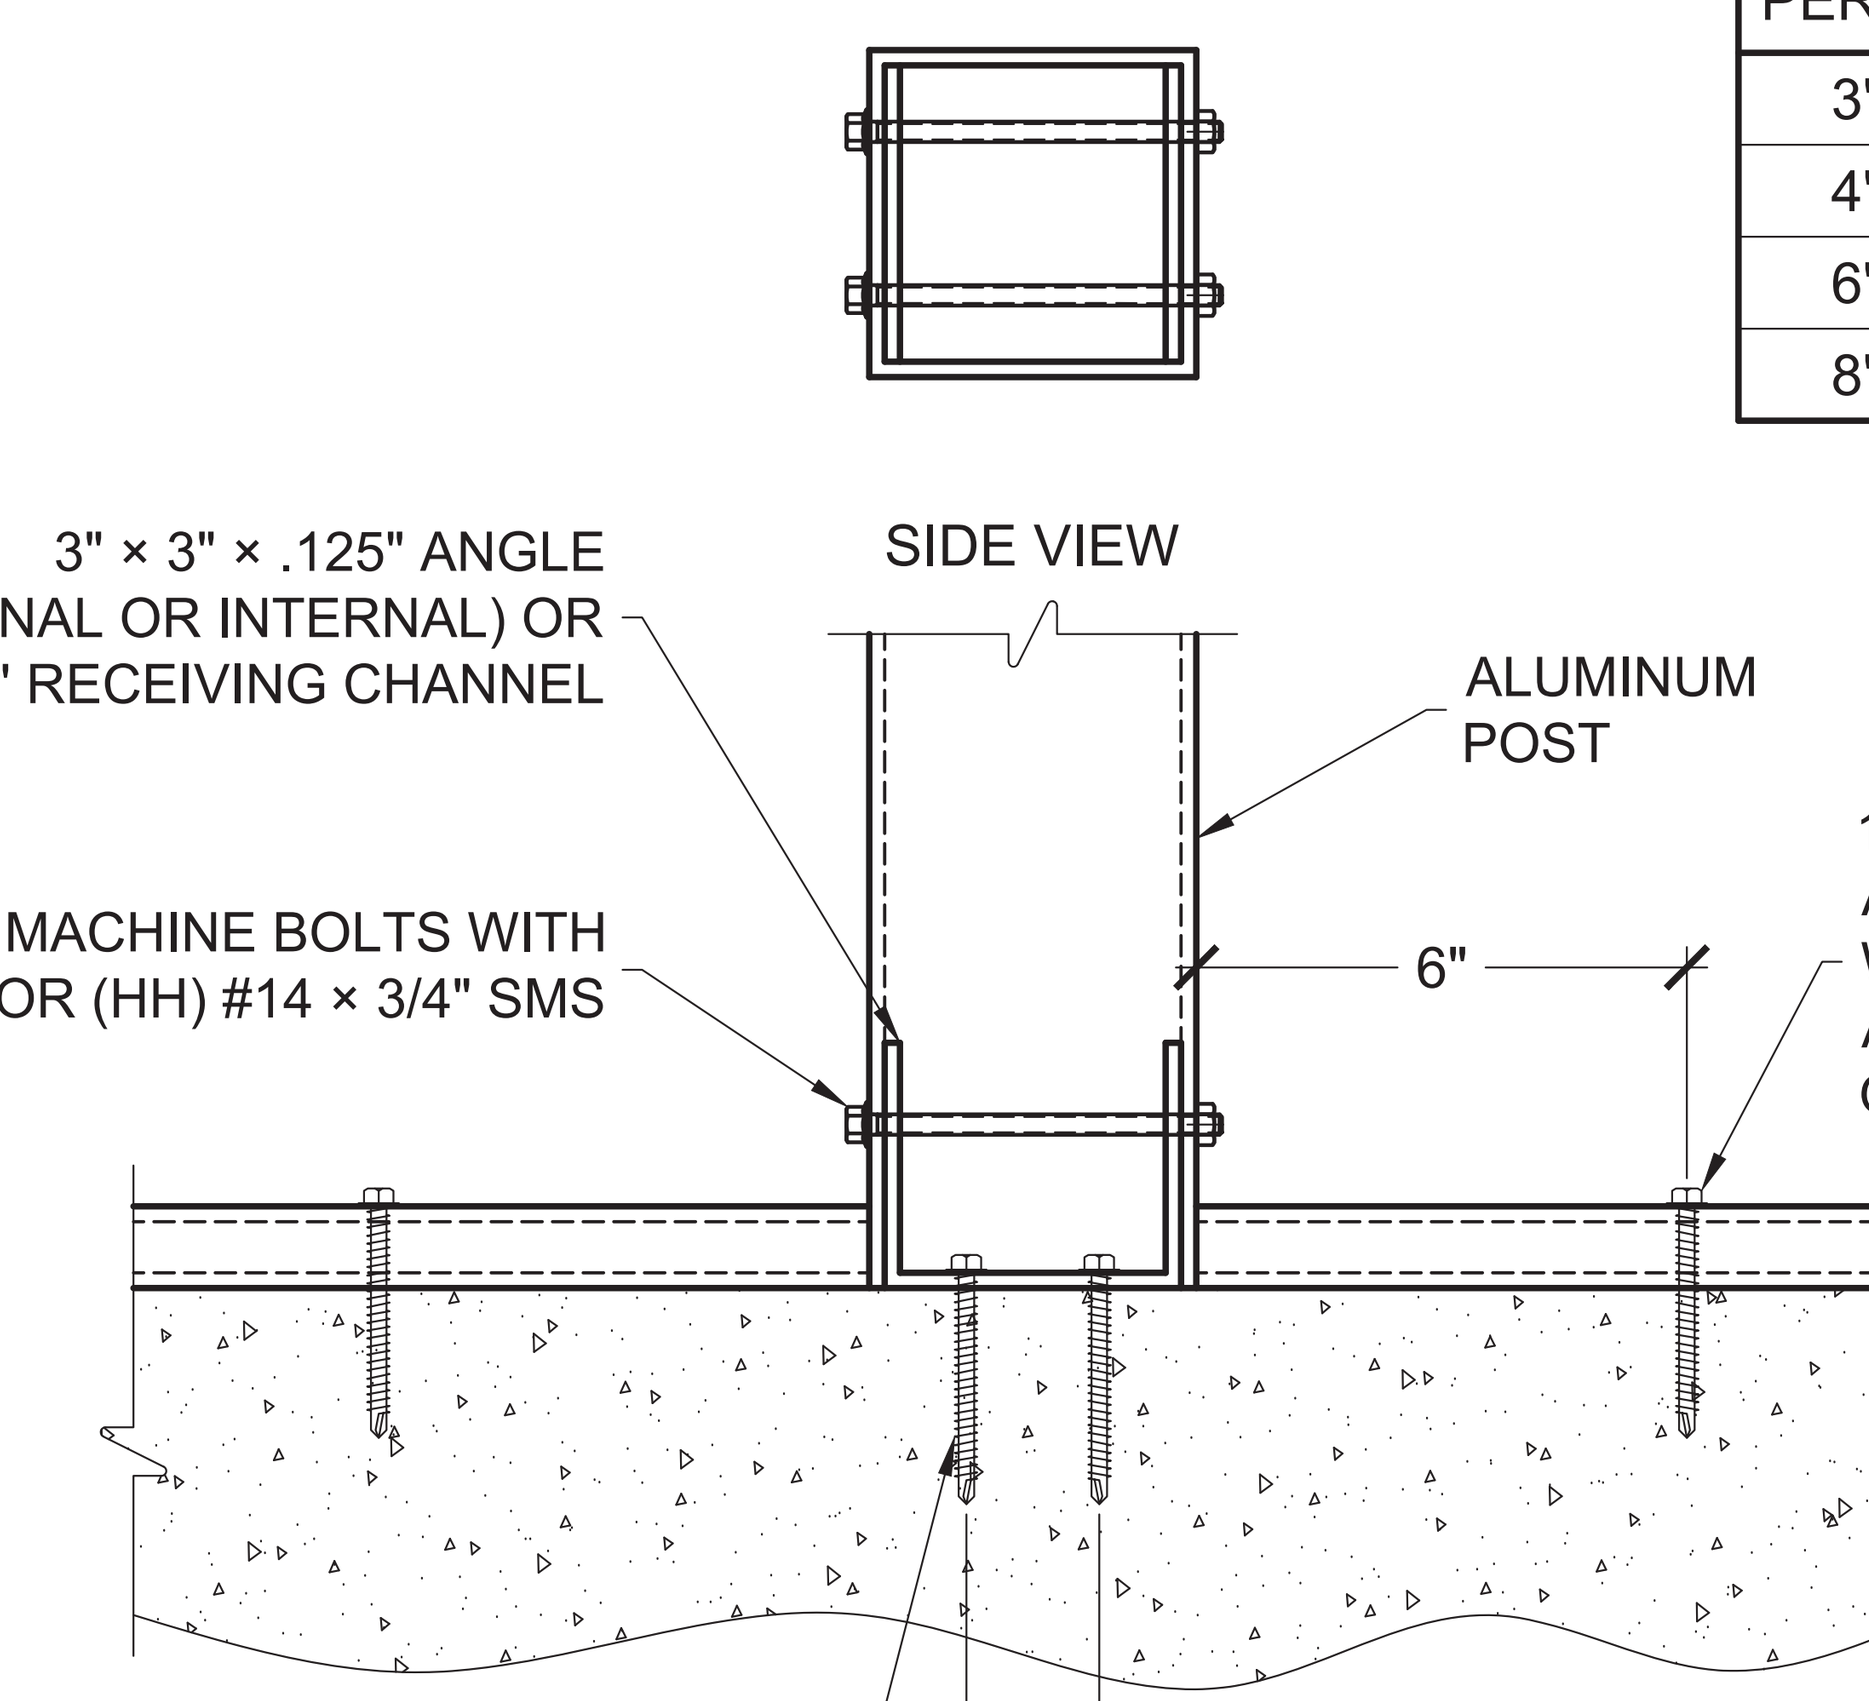

POST SIZE PER PLAN	(H)	(HH)	(S1)	(S2)
3"X3"	2	4	1/4"	2"
4"X4"	2	4	3/8"	2"
6"X6"	3	6	3/8"	4"
8"X8"	3	6	3/8"	4"

NOTES:
1. CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON TITEN HD (S1) Ø SCREW ANCHORS, OTHER SIZE OR TYPE OF ANCHORS SHALL NOT BE USED.
2. FOR PATIO COVERS AND CARPORTS: DISREGARD THE 1 × 2 OPEN BACK SCREEN MEMBER ON THE FOUNDATION TYP.
3. MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL POST LOCATIONS. ALL SCREW LENGTHS AT POST CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
4. MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
5. DETAIL MAY BE FLIPPED AS NEEDED
6. USE 1/4" × 3" LAG SCREWS IN LIEU OF CONCRETE SCREWS FOR WOOD HEADERS

ALUMINUM POST CONNECTION DETAIL
SCALE: N.T.S.

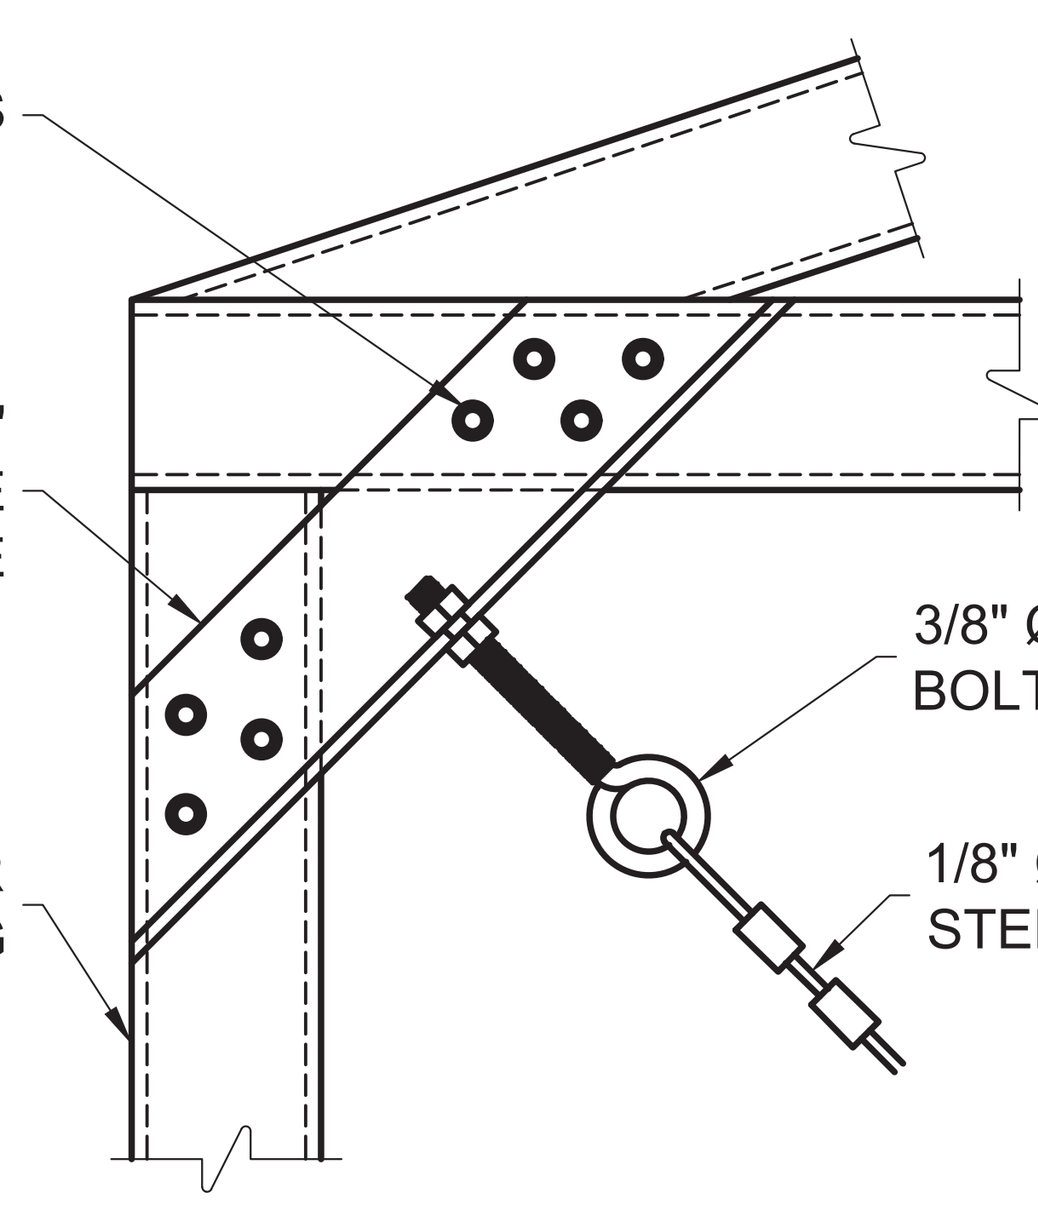

OPTION #1

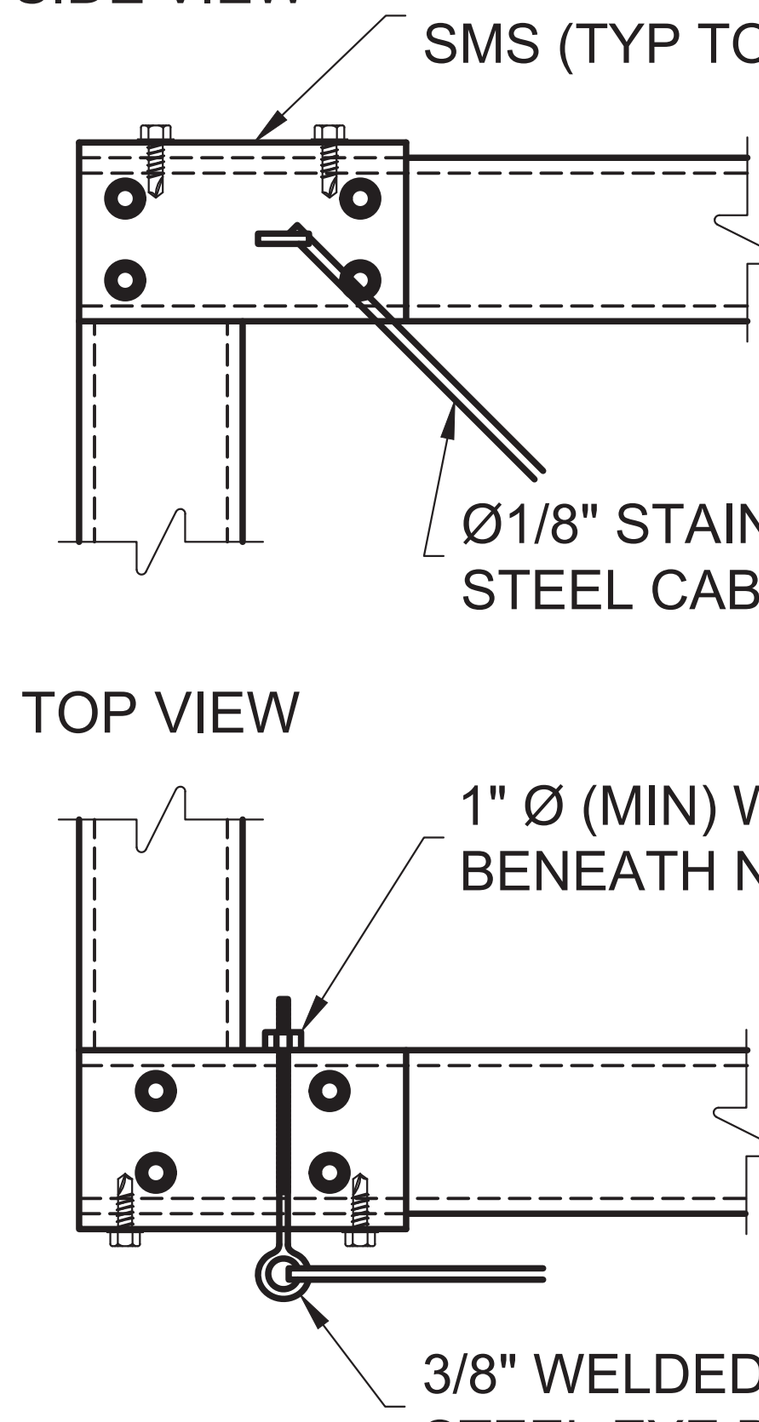

NOTES:
WHEN USING CORNER CONNECTION OPTION #2 CONNECTION CABLE MUST BE WITHIN 6" OF CORNER OR PRIMARY MEMBER.

OPTION #2

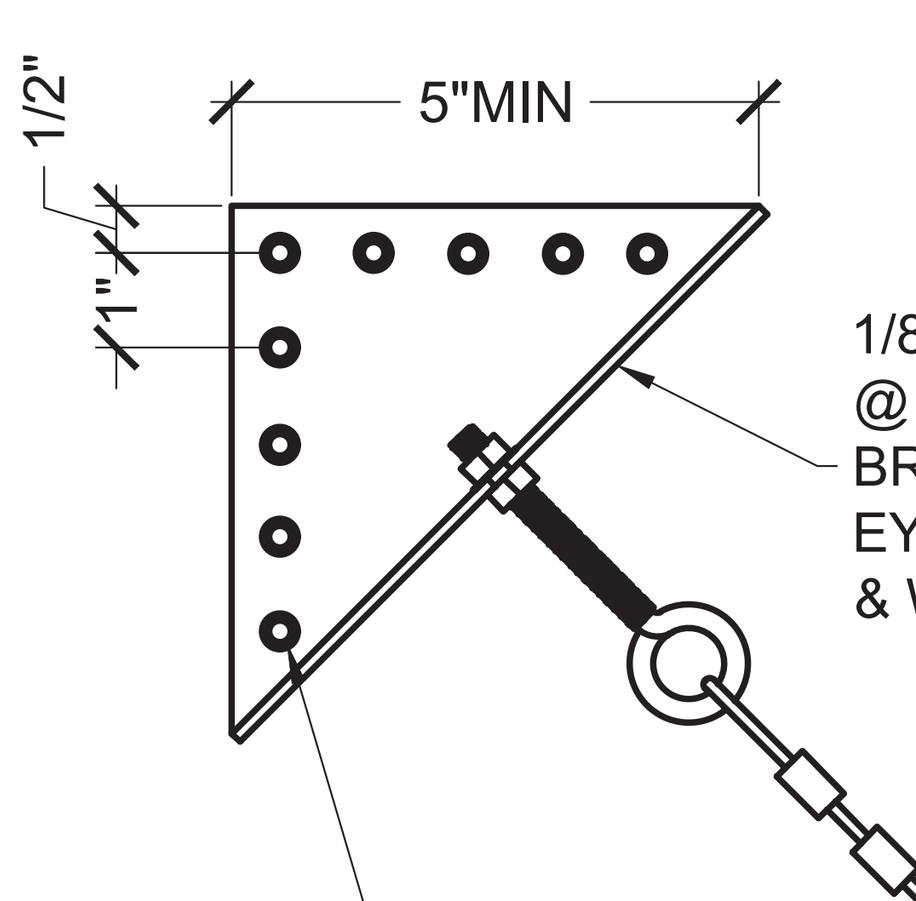

OPTION #3

CABLE CONNECTION AT CORNER
SCALE: N.T.S.

OPTION #1 OPTION #2

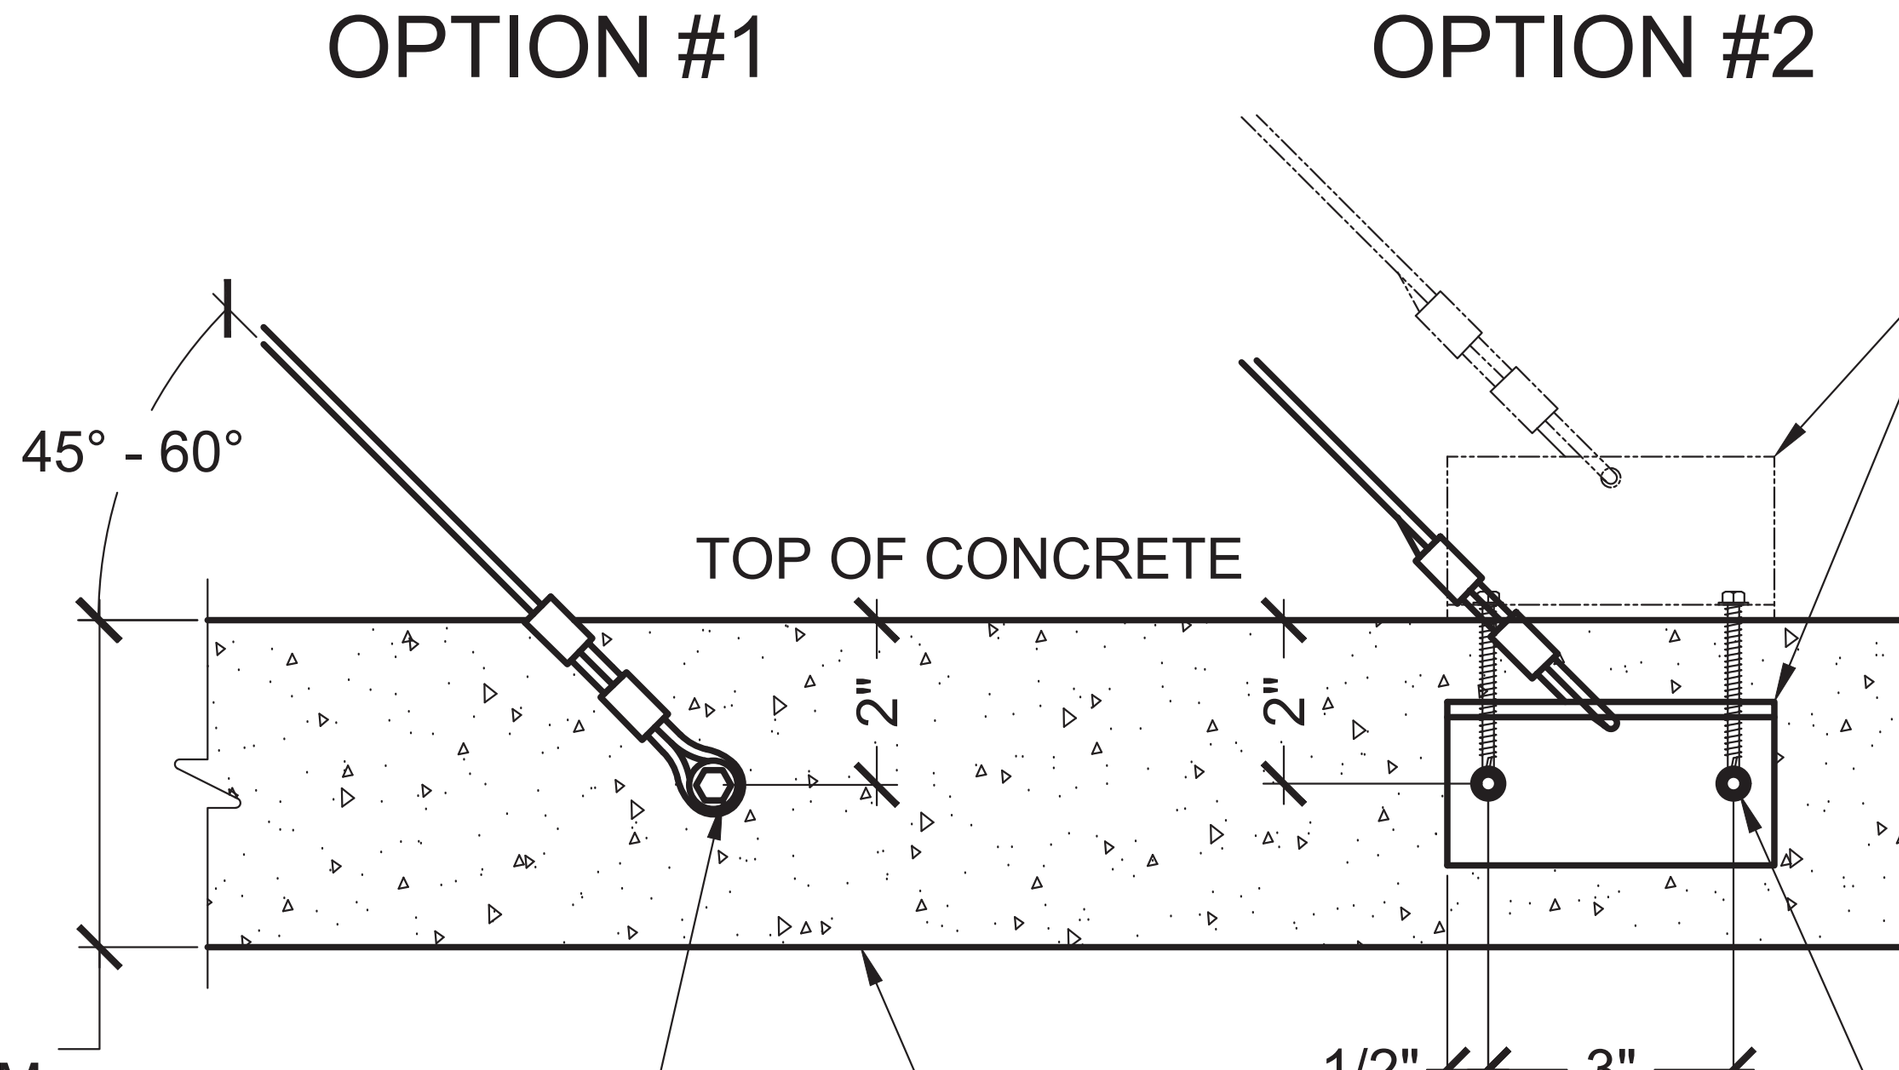

OPTION #3
USE WITH FOOTING ONLY

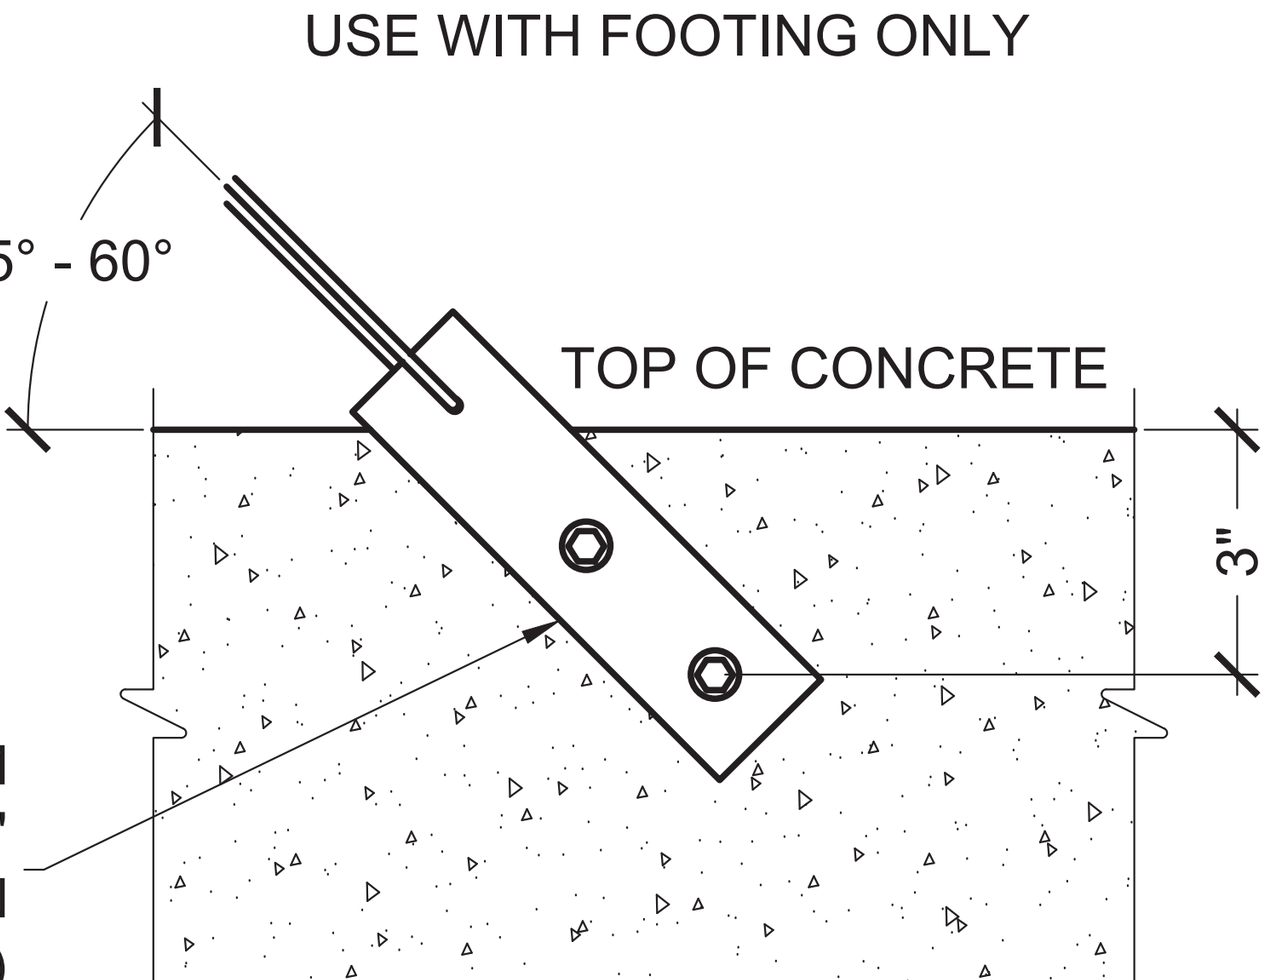

BRANDON CAMPBELL LICENSE 100195 STATE OF FLORIDA PROFESSIONAL ENGINEER

CABLE CONNECTION AT FOUNDATION
SCALE: N.T.S.

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	5/28/2026

NOTICE:

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 5/28/2026
SHEET: 5
DRAWING TITLE: DETAILS CONT.
PROJECT NAME: HODGES, MICHAEL

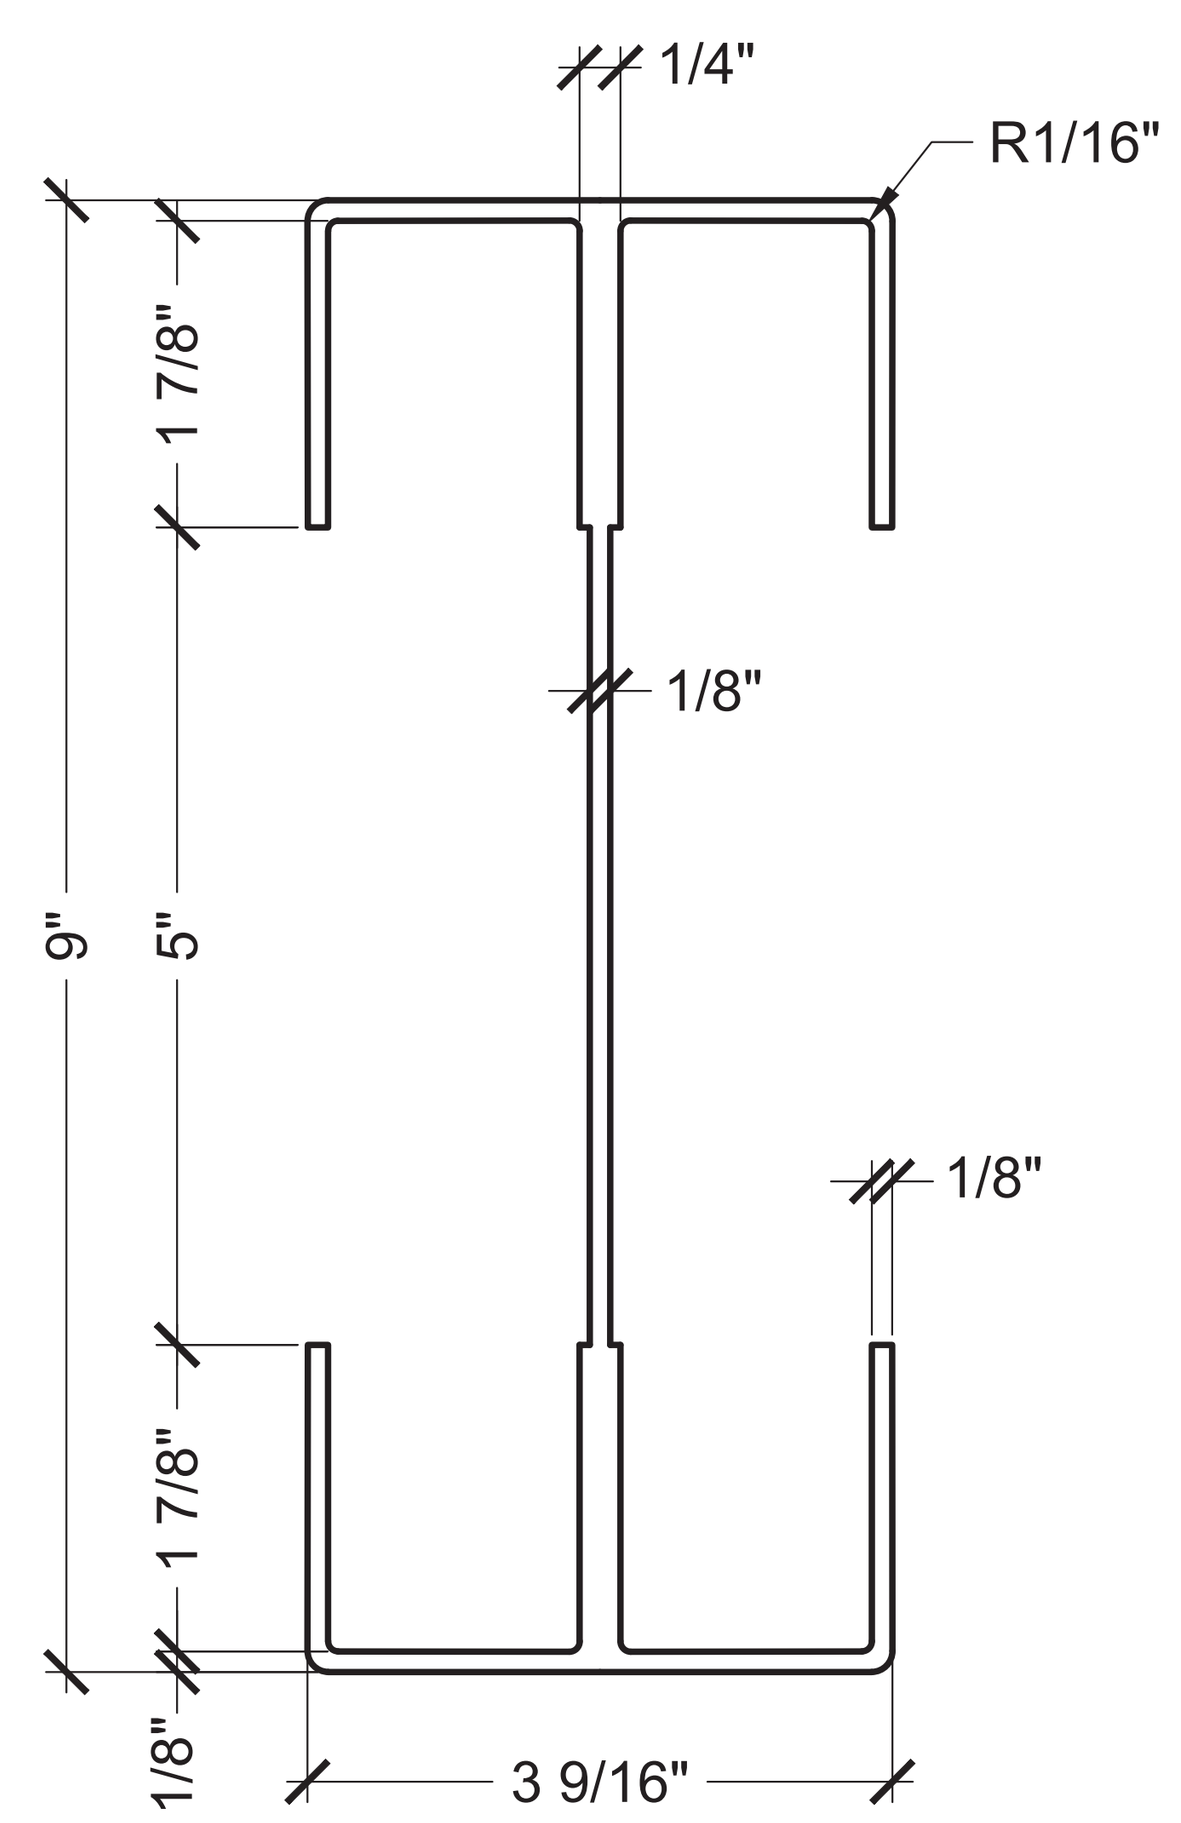

ULTIMATE VIEW GUSSET MATERIAL
SCALE: N.T.S.

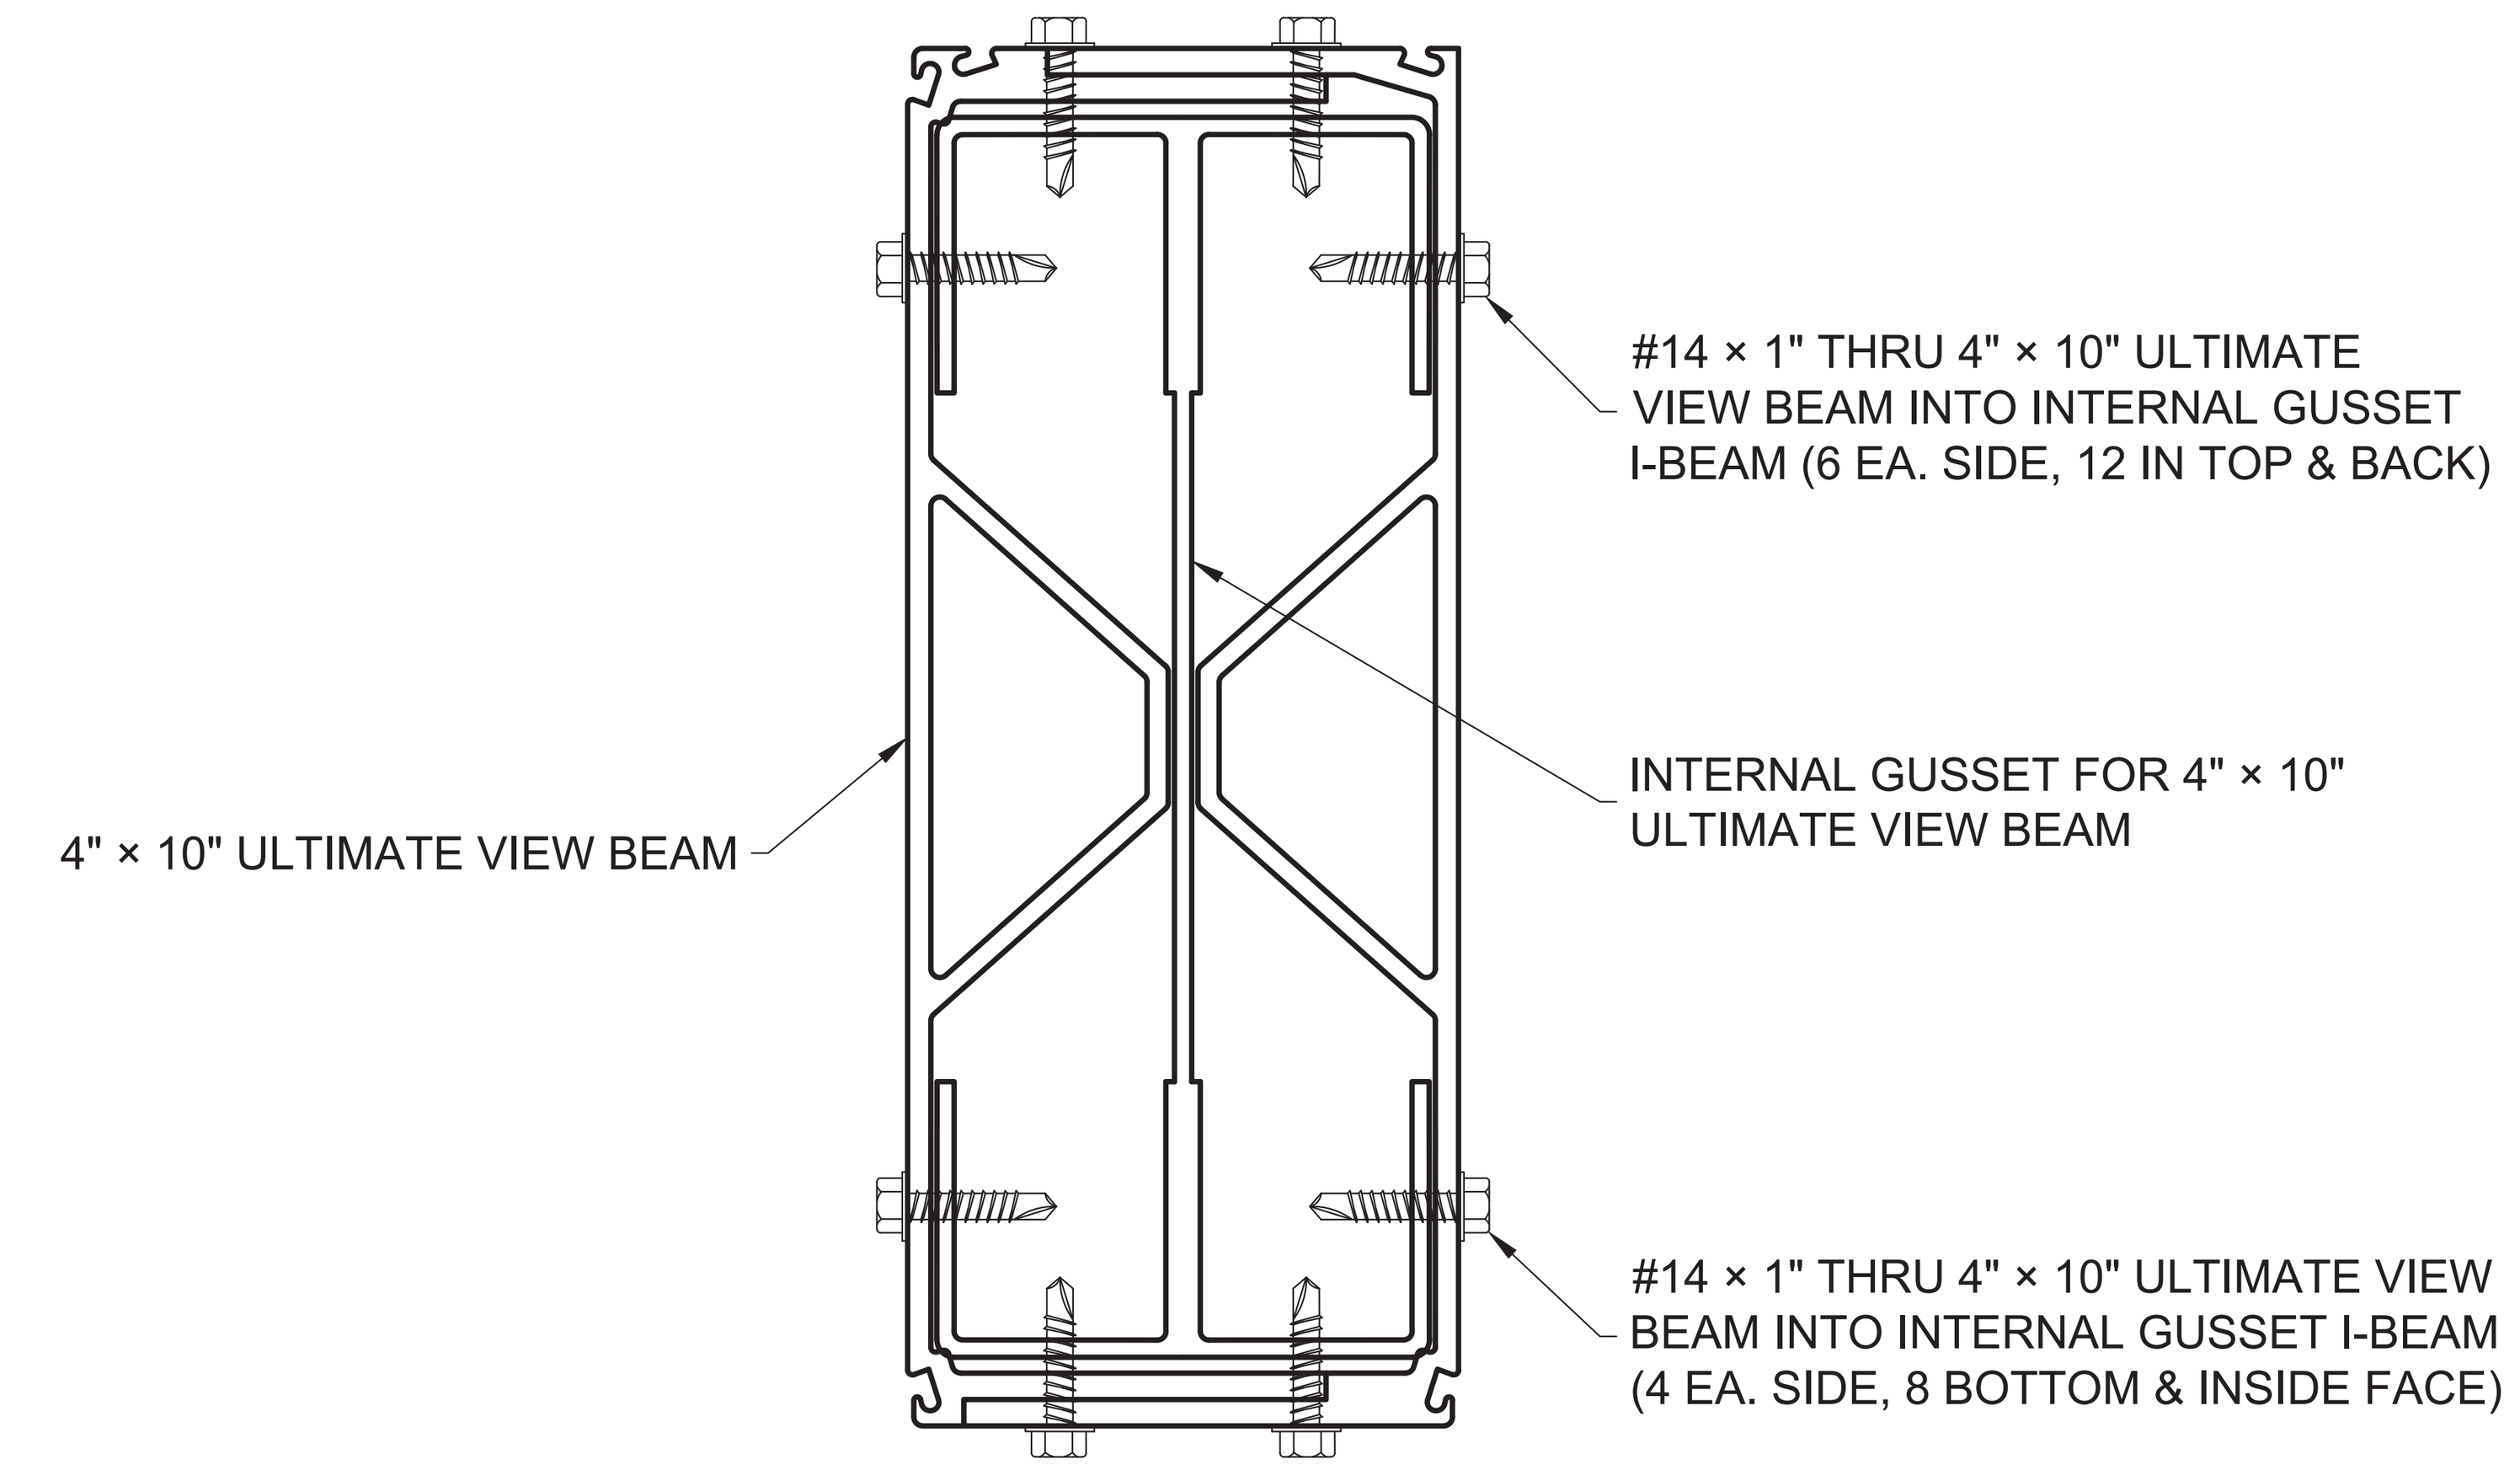

ULTIMATE VIEW UPRIGHT TO BEAM GUSSET MATERIAL
SCALE: N.T.S.

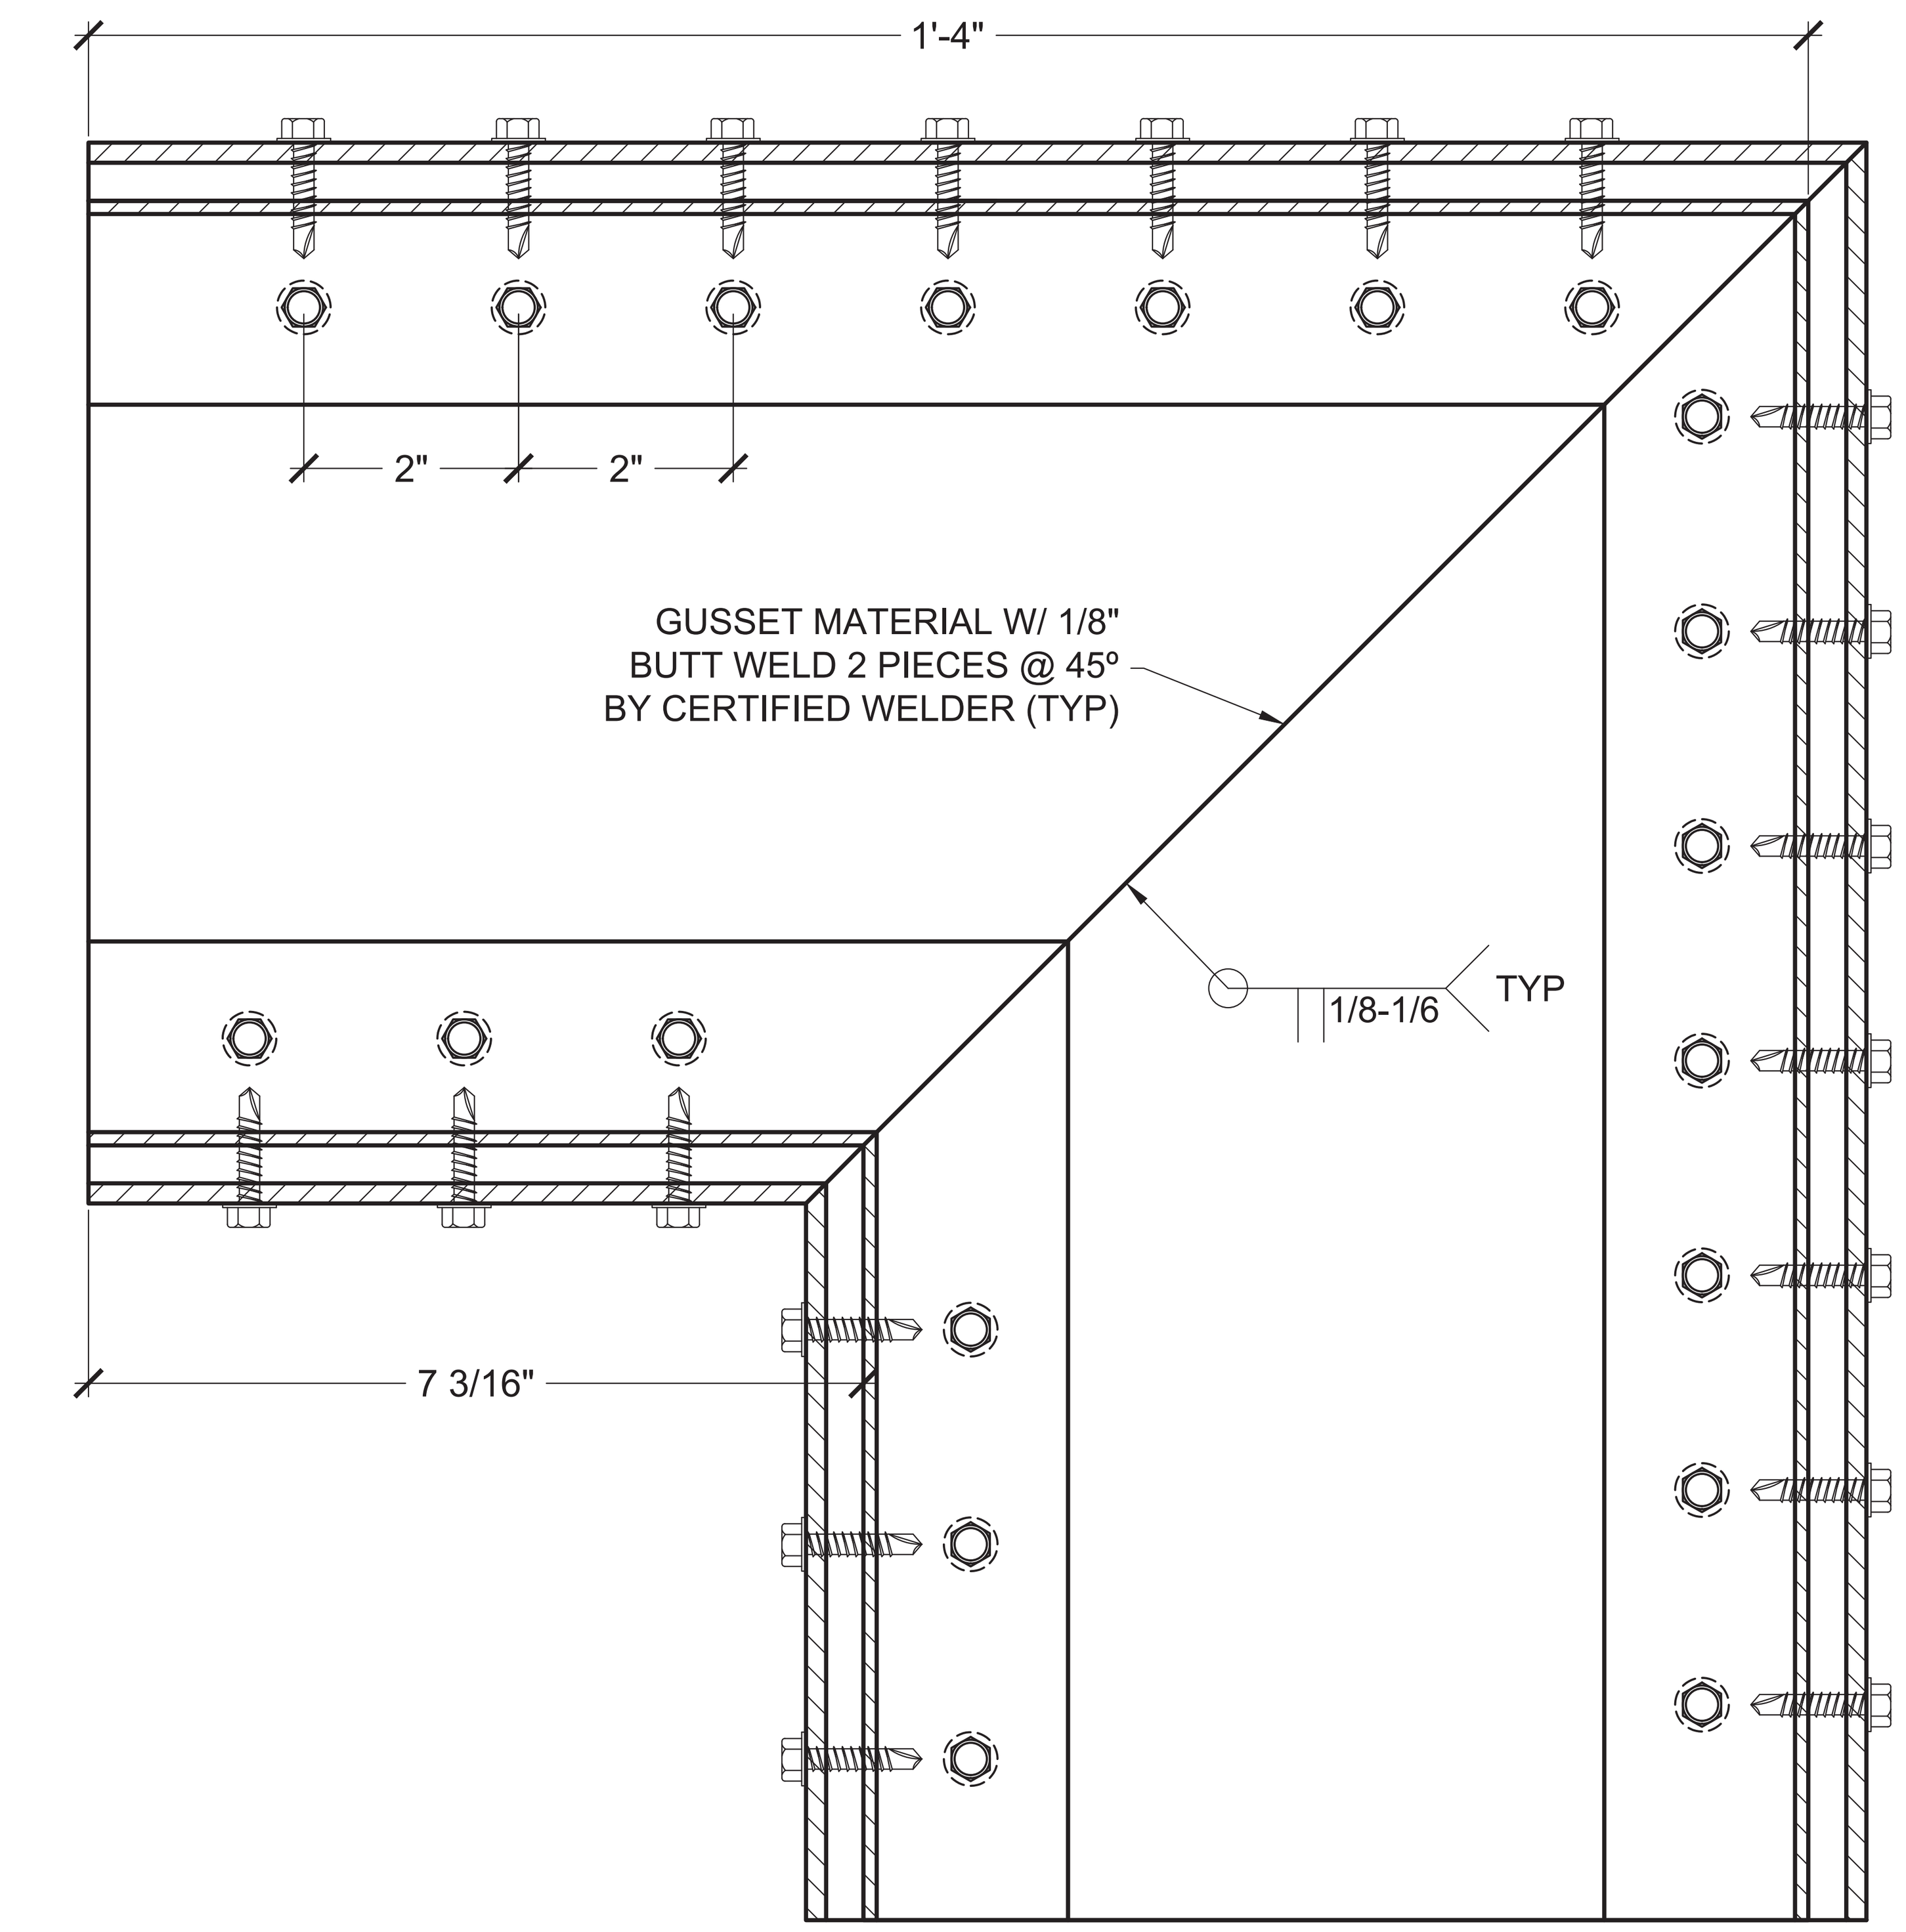

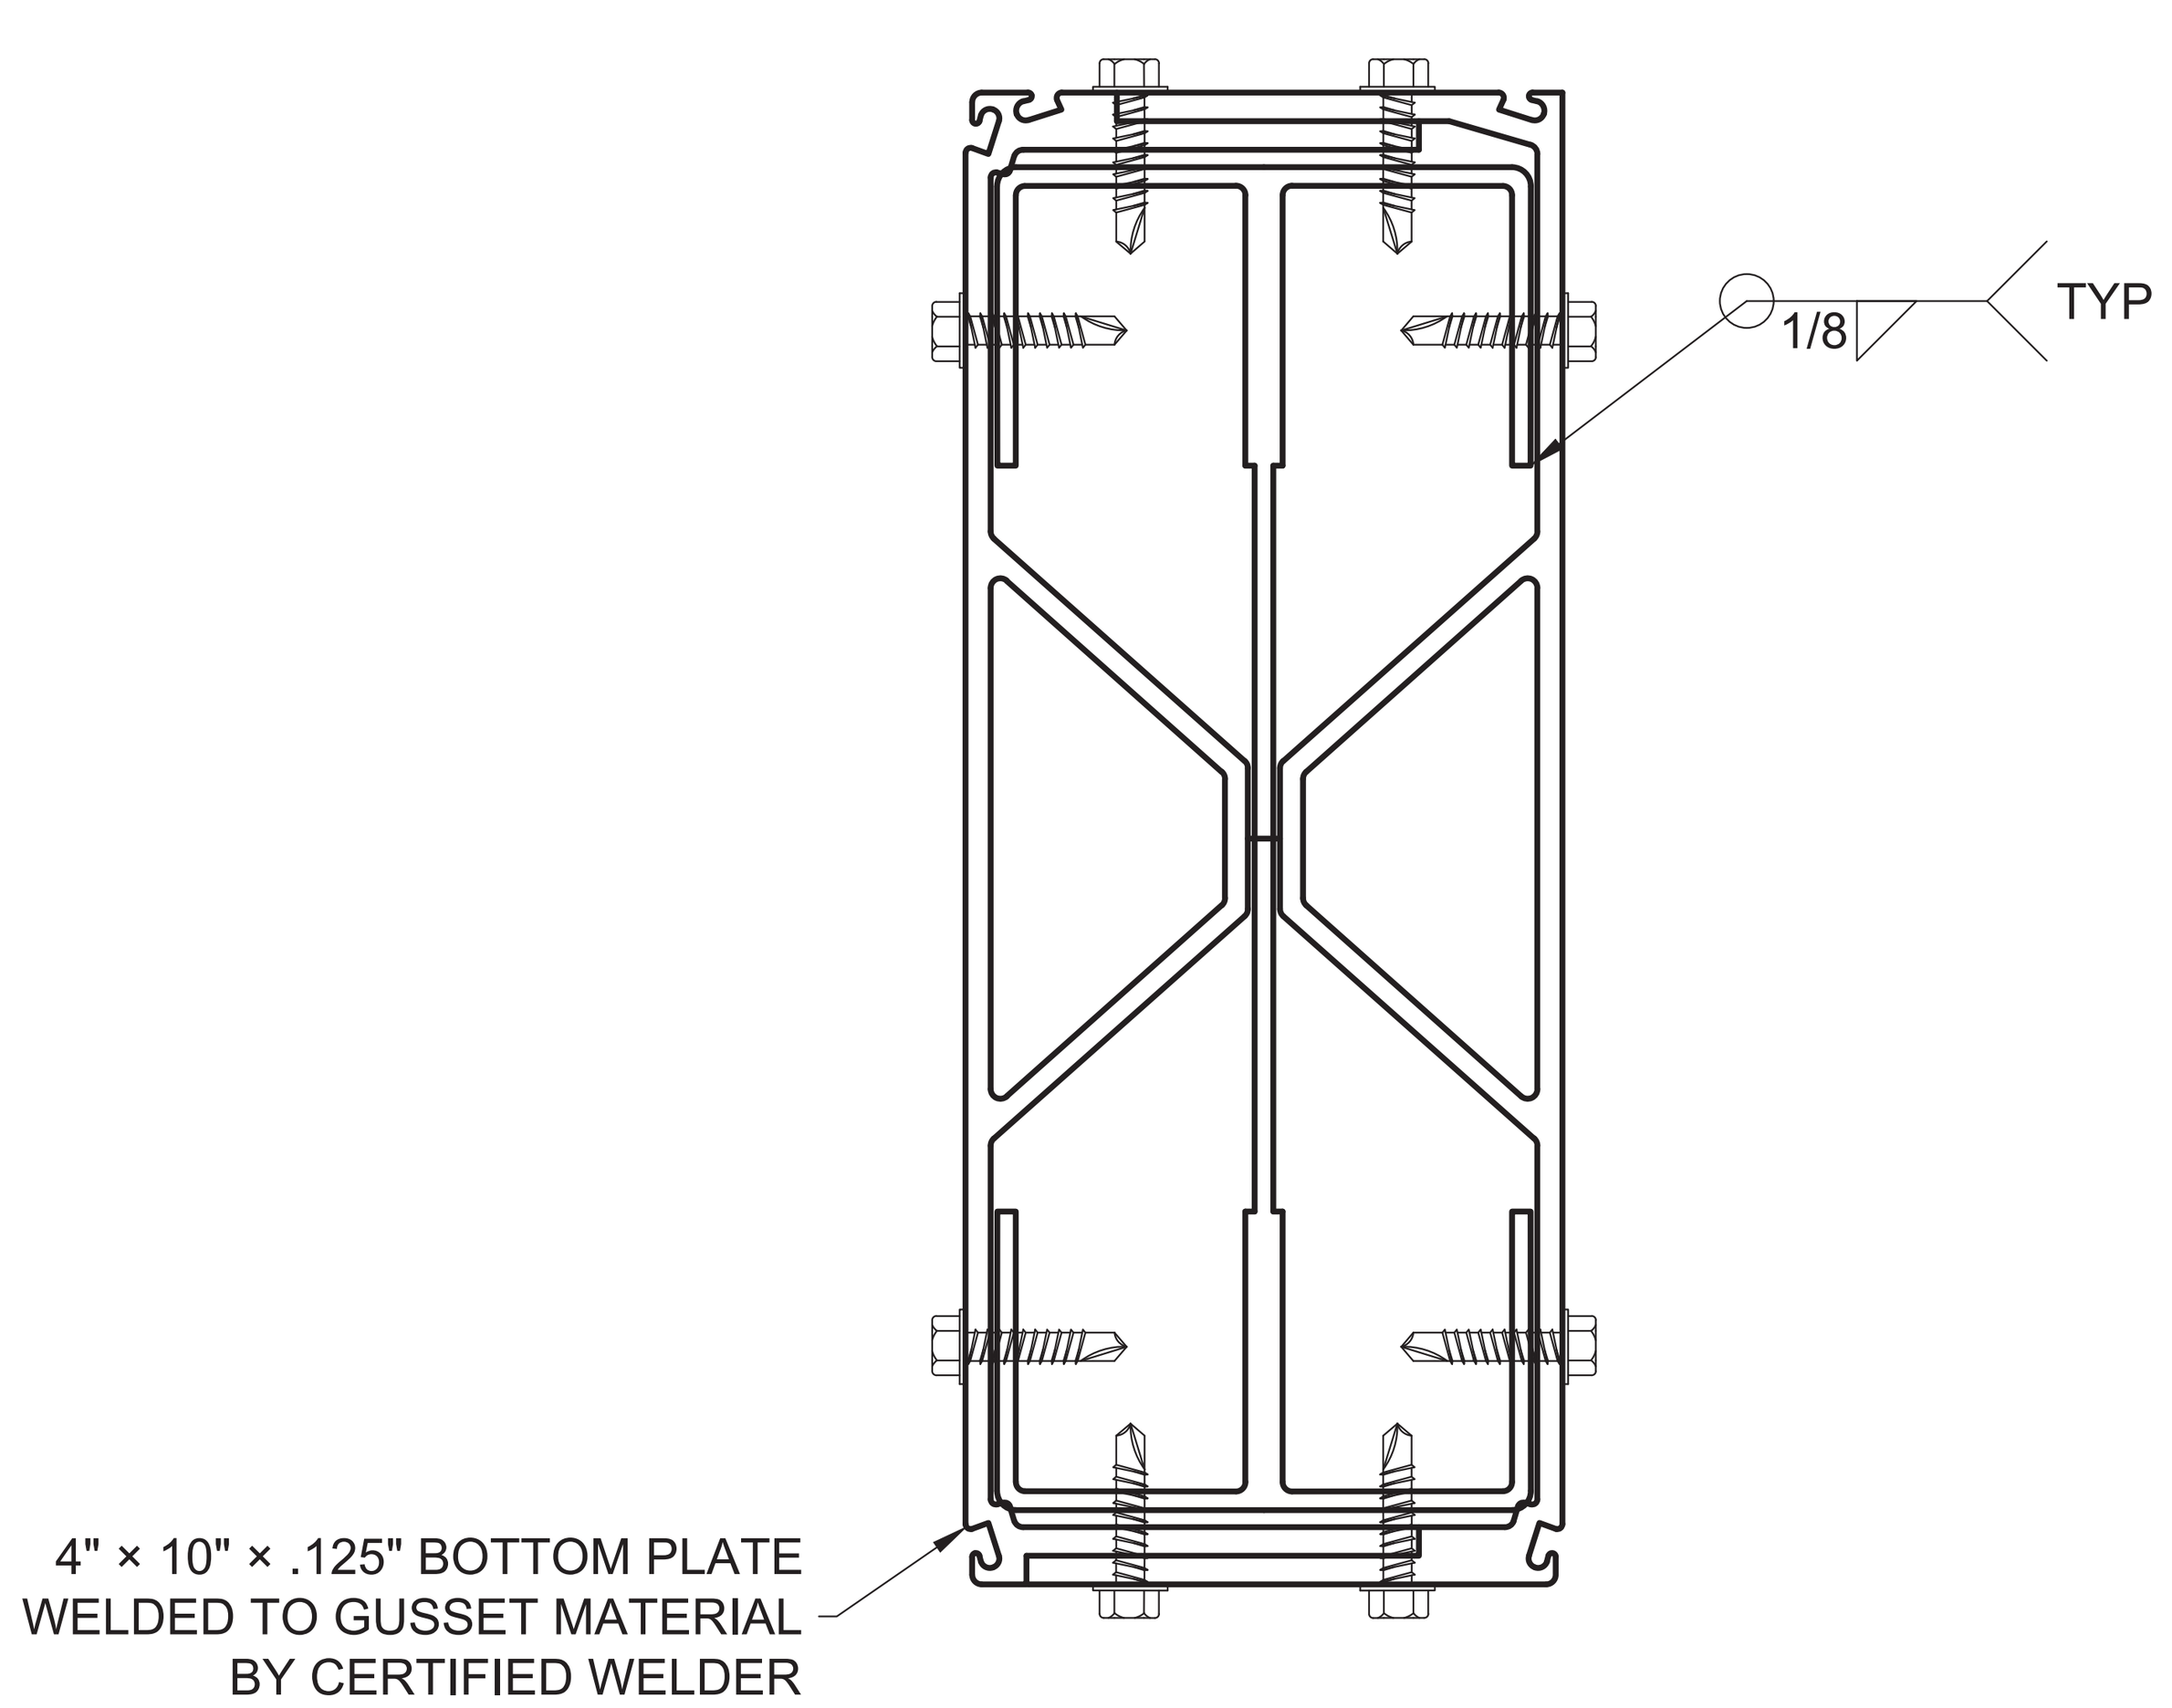

ULTIMATE VIEW UPRIGHT TO BEAM WELD GUSSET MATERIAL
SCALE: N.T.S.

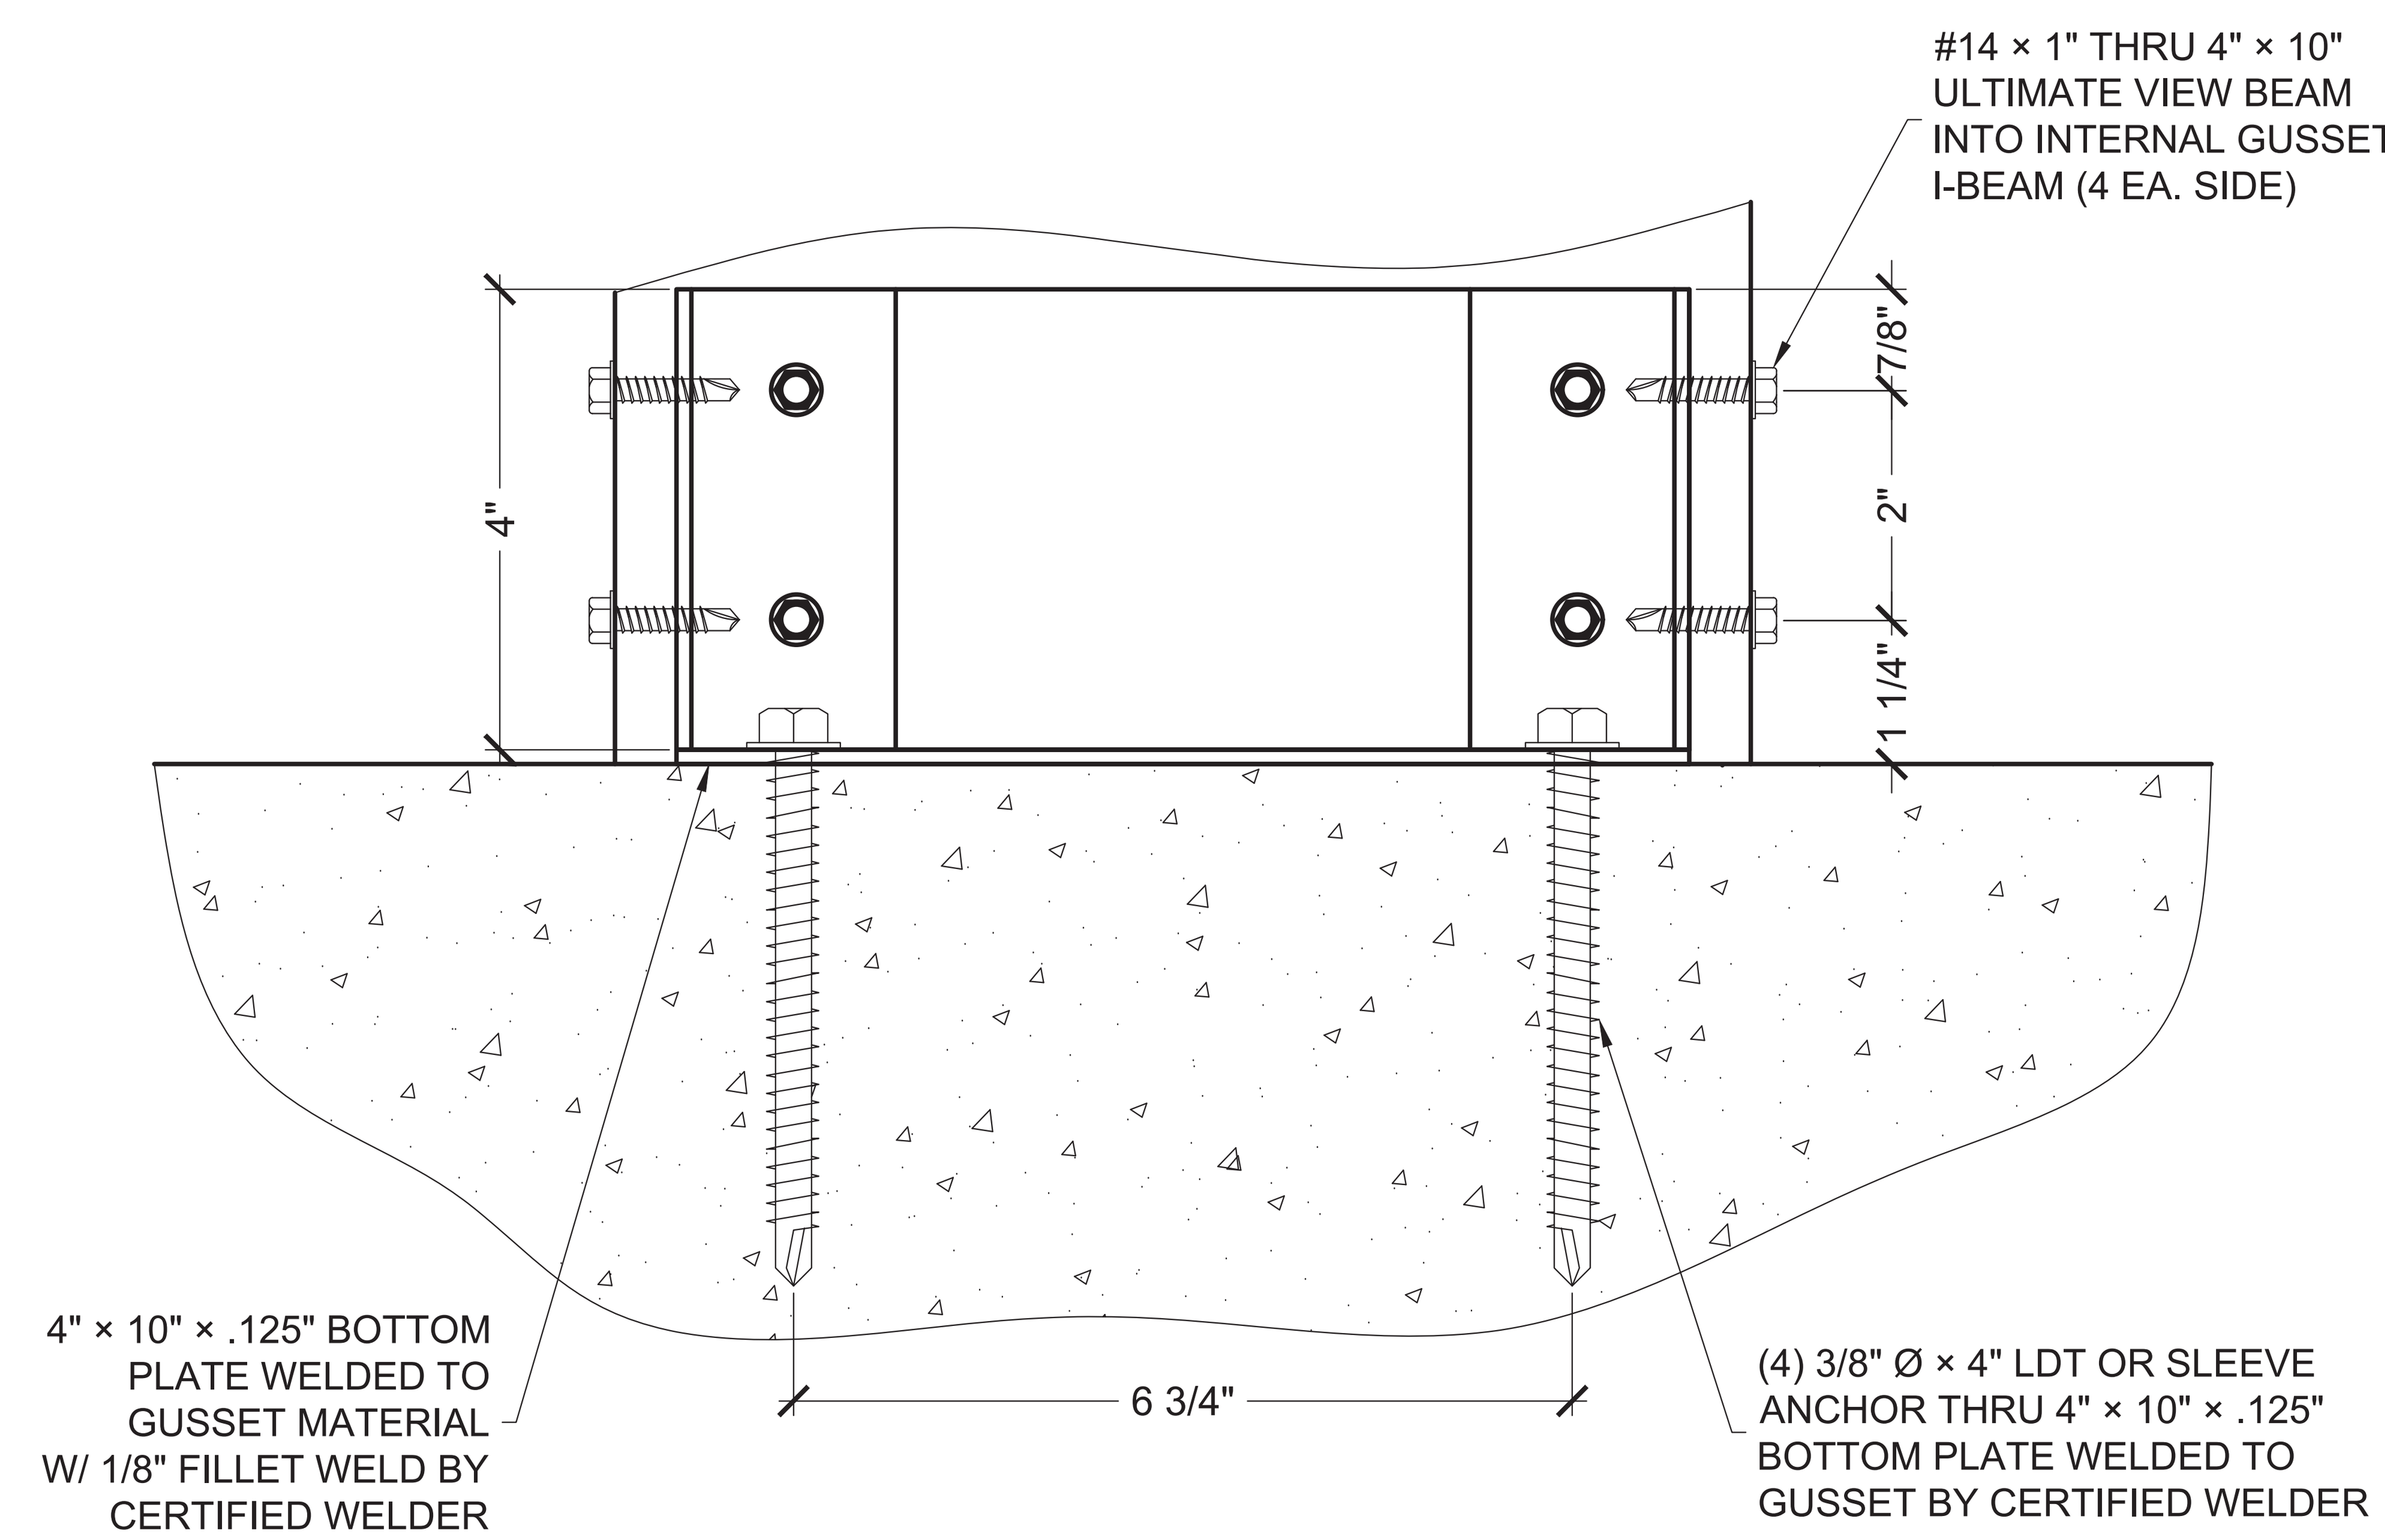

ULTIMATE VIEW BASE MATERIAL
SCALE: N.T.S.

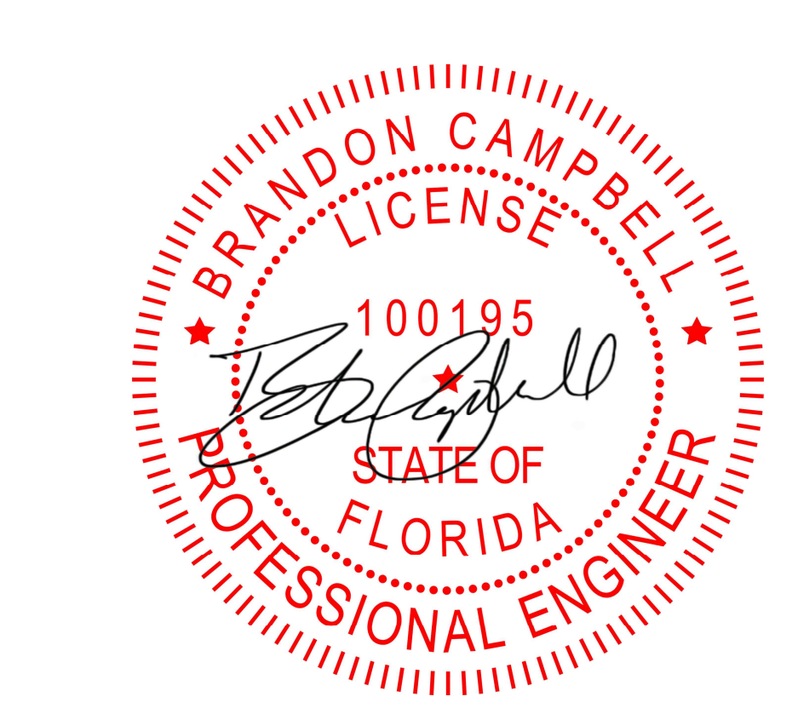

ULTIMATE VIEW UPRIGHT TO BEAM GUSSET MATERIAL
SCALE: N.T.S.

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	5/28/2026

NOTICE:

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 5/28/2026
SHEET: 6
DRAWING TITLE: DETAILS CONT.
PROJECT NAME: HODGES, MICHAEL

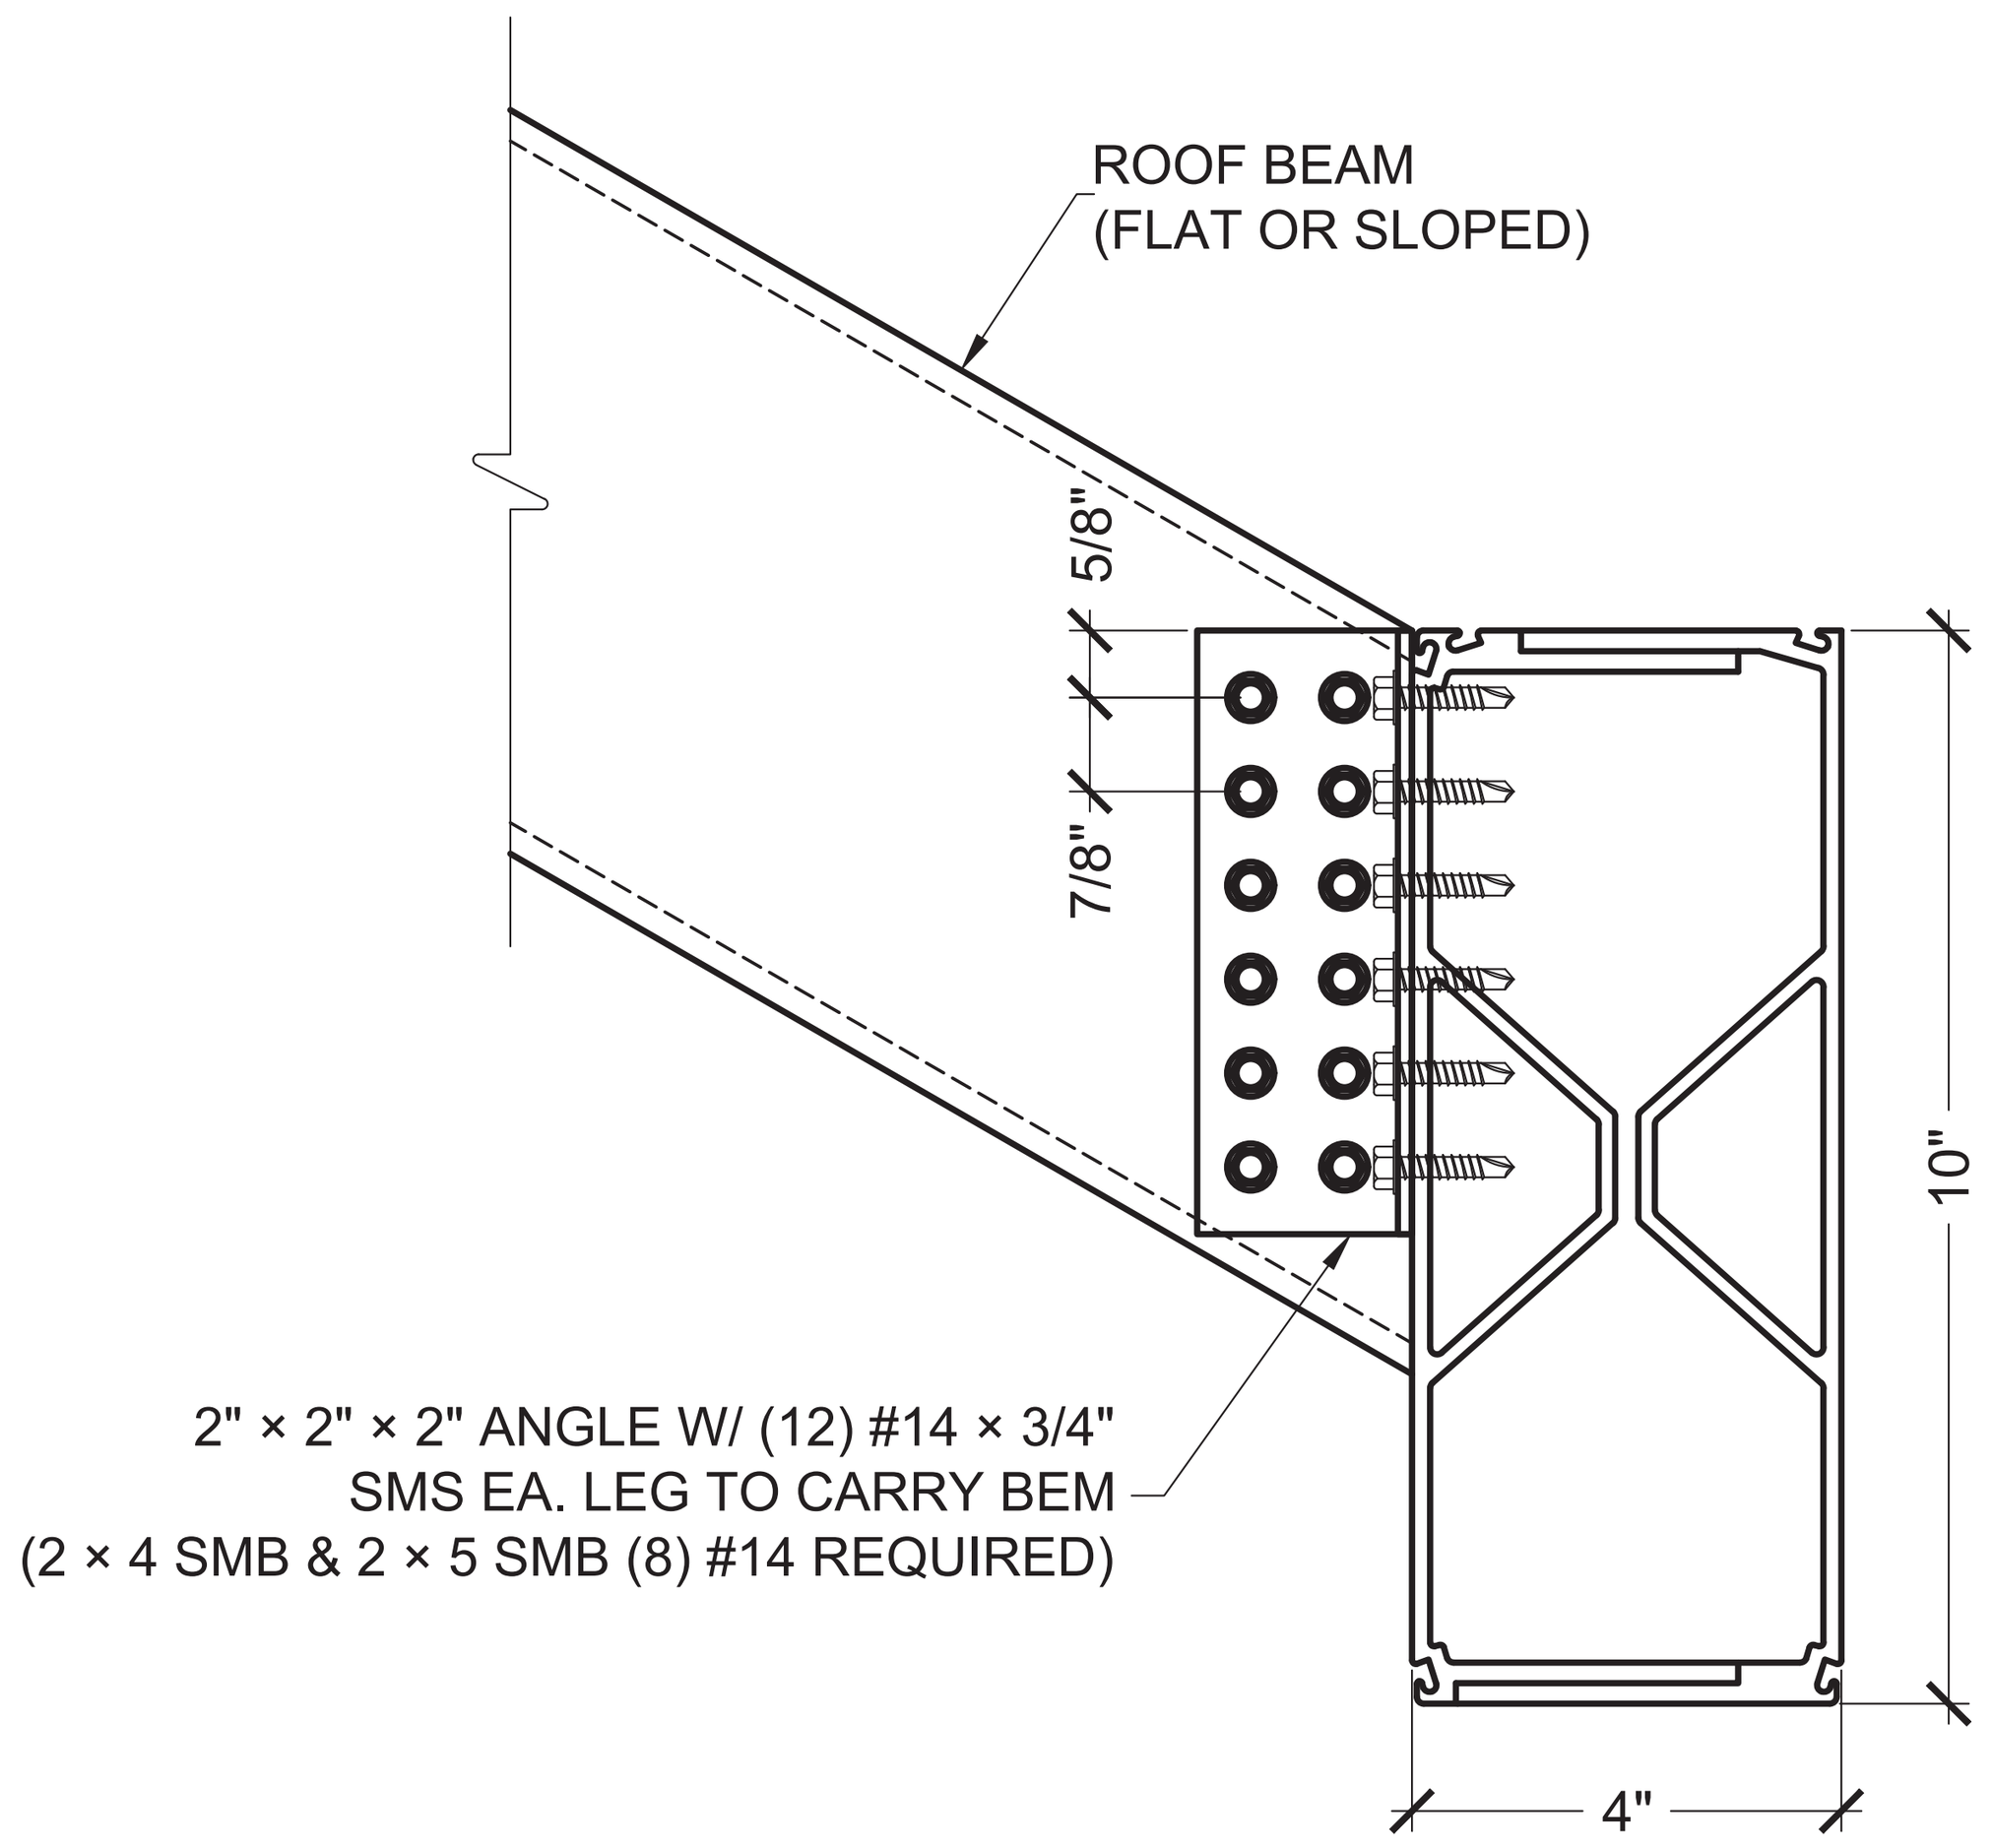

ROOF BEAM TO CARRIER BEAM CONNECTION DETAIL
SCALE: N.T.S.

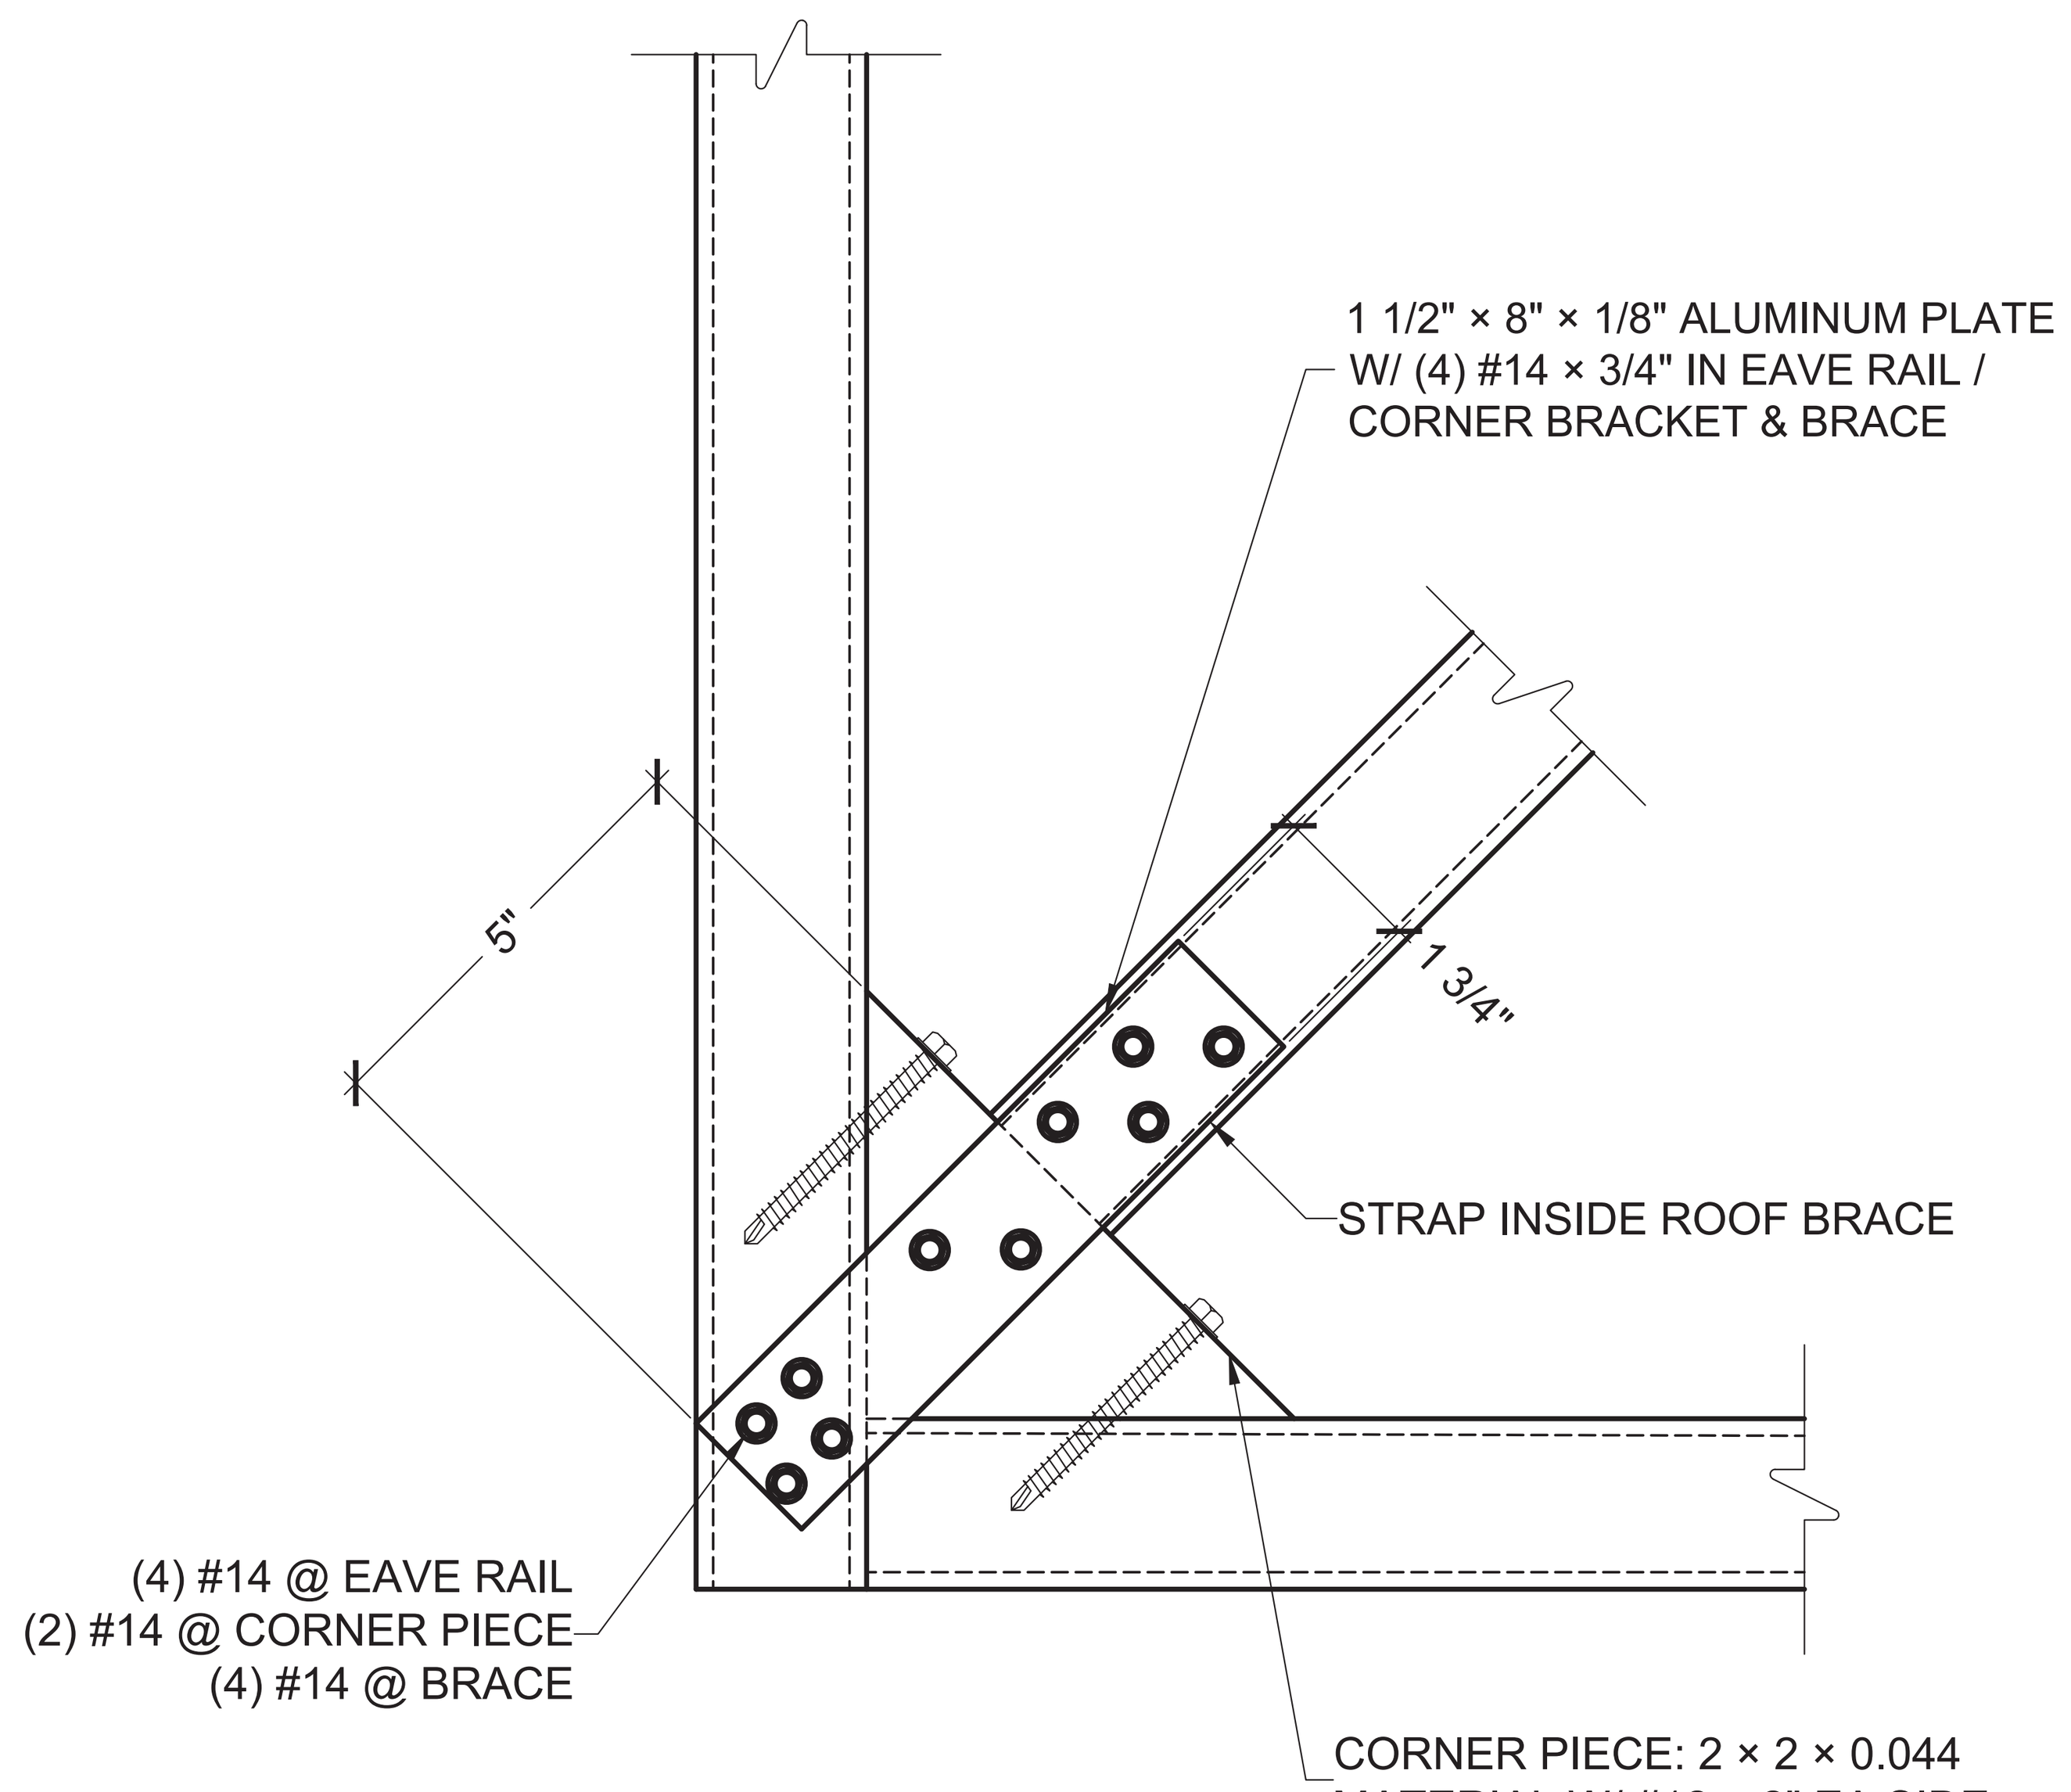

ROOF BRACING CONNECTION DETAIL
SCALE: N.T.S.

OPTION #1

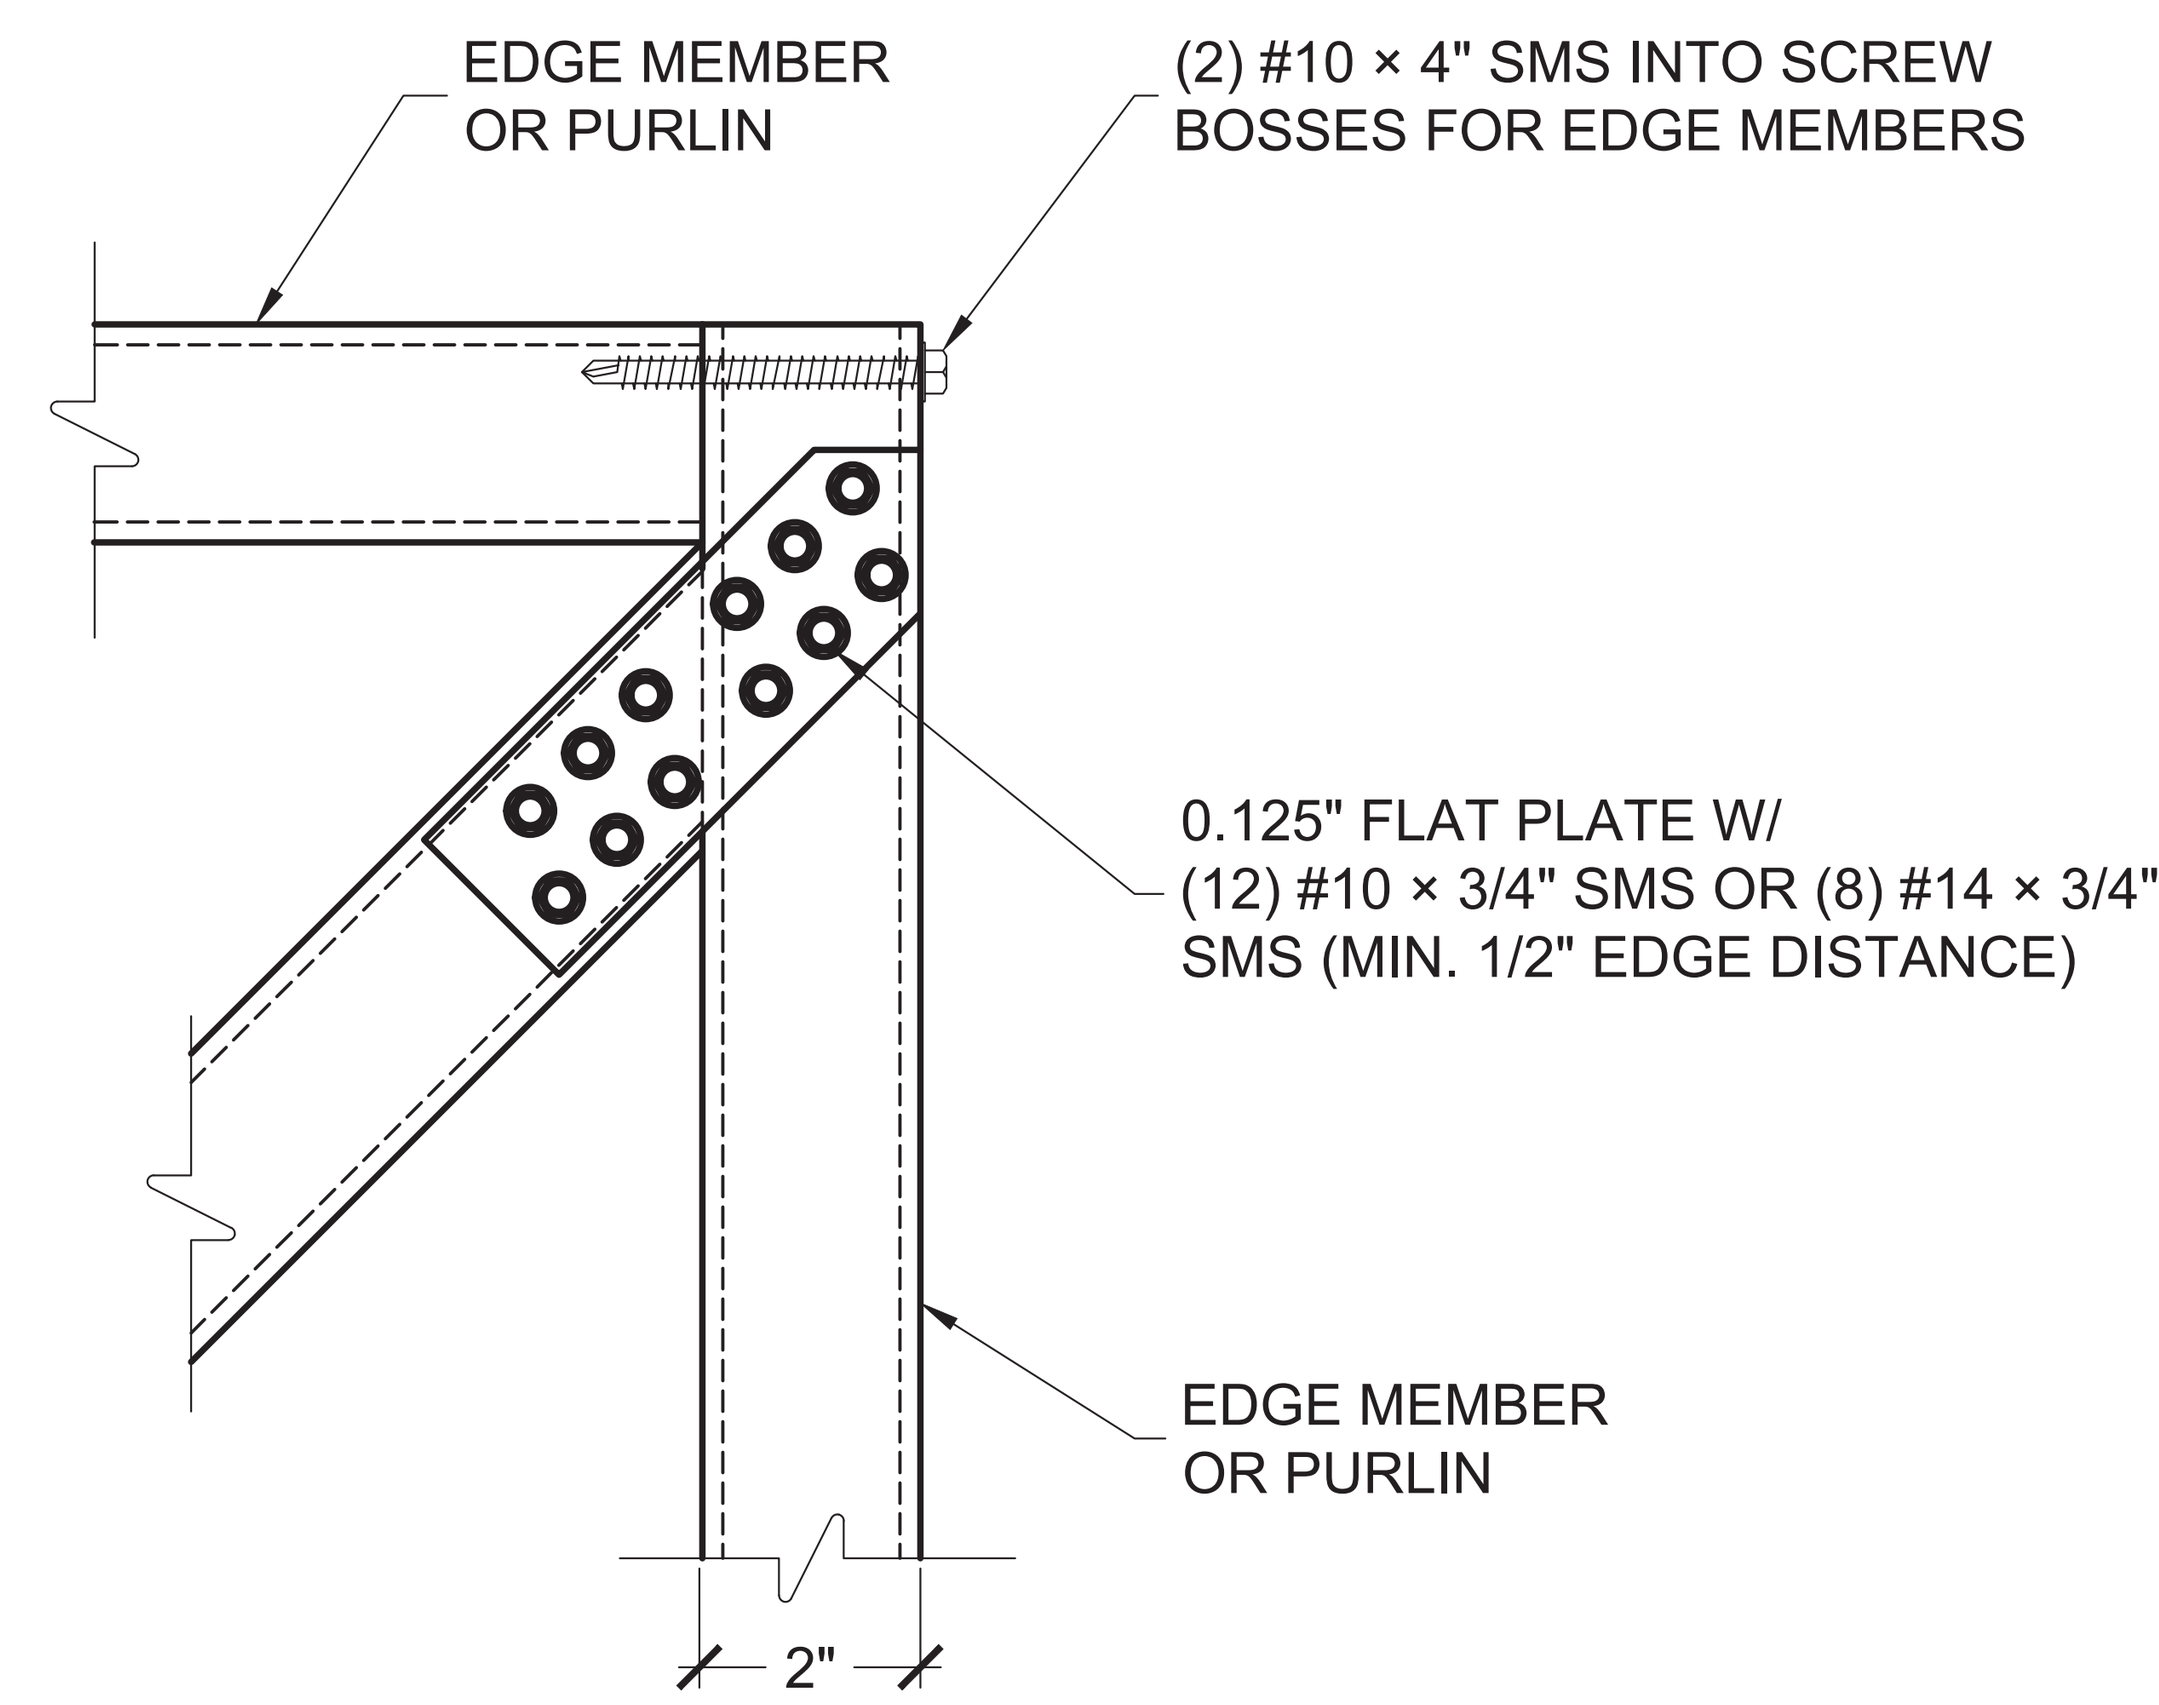

BOTH ENDS SIMILAR

OPTION #2

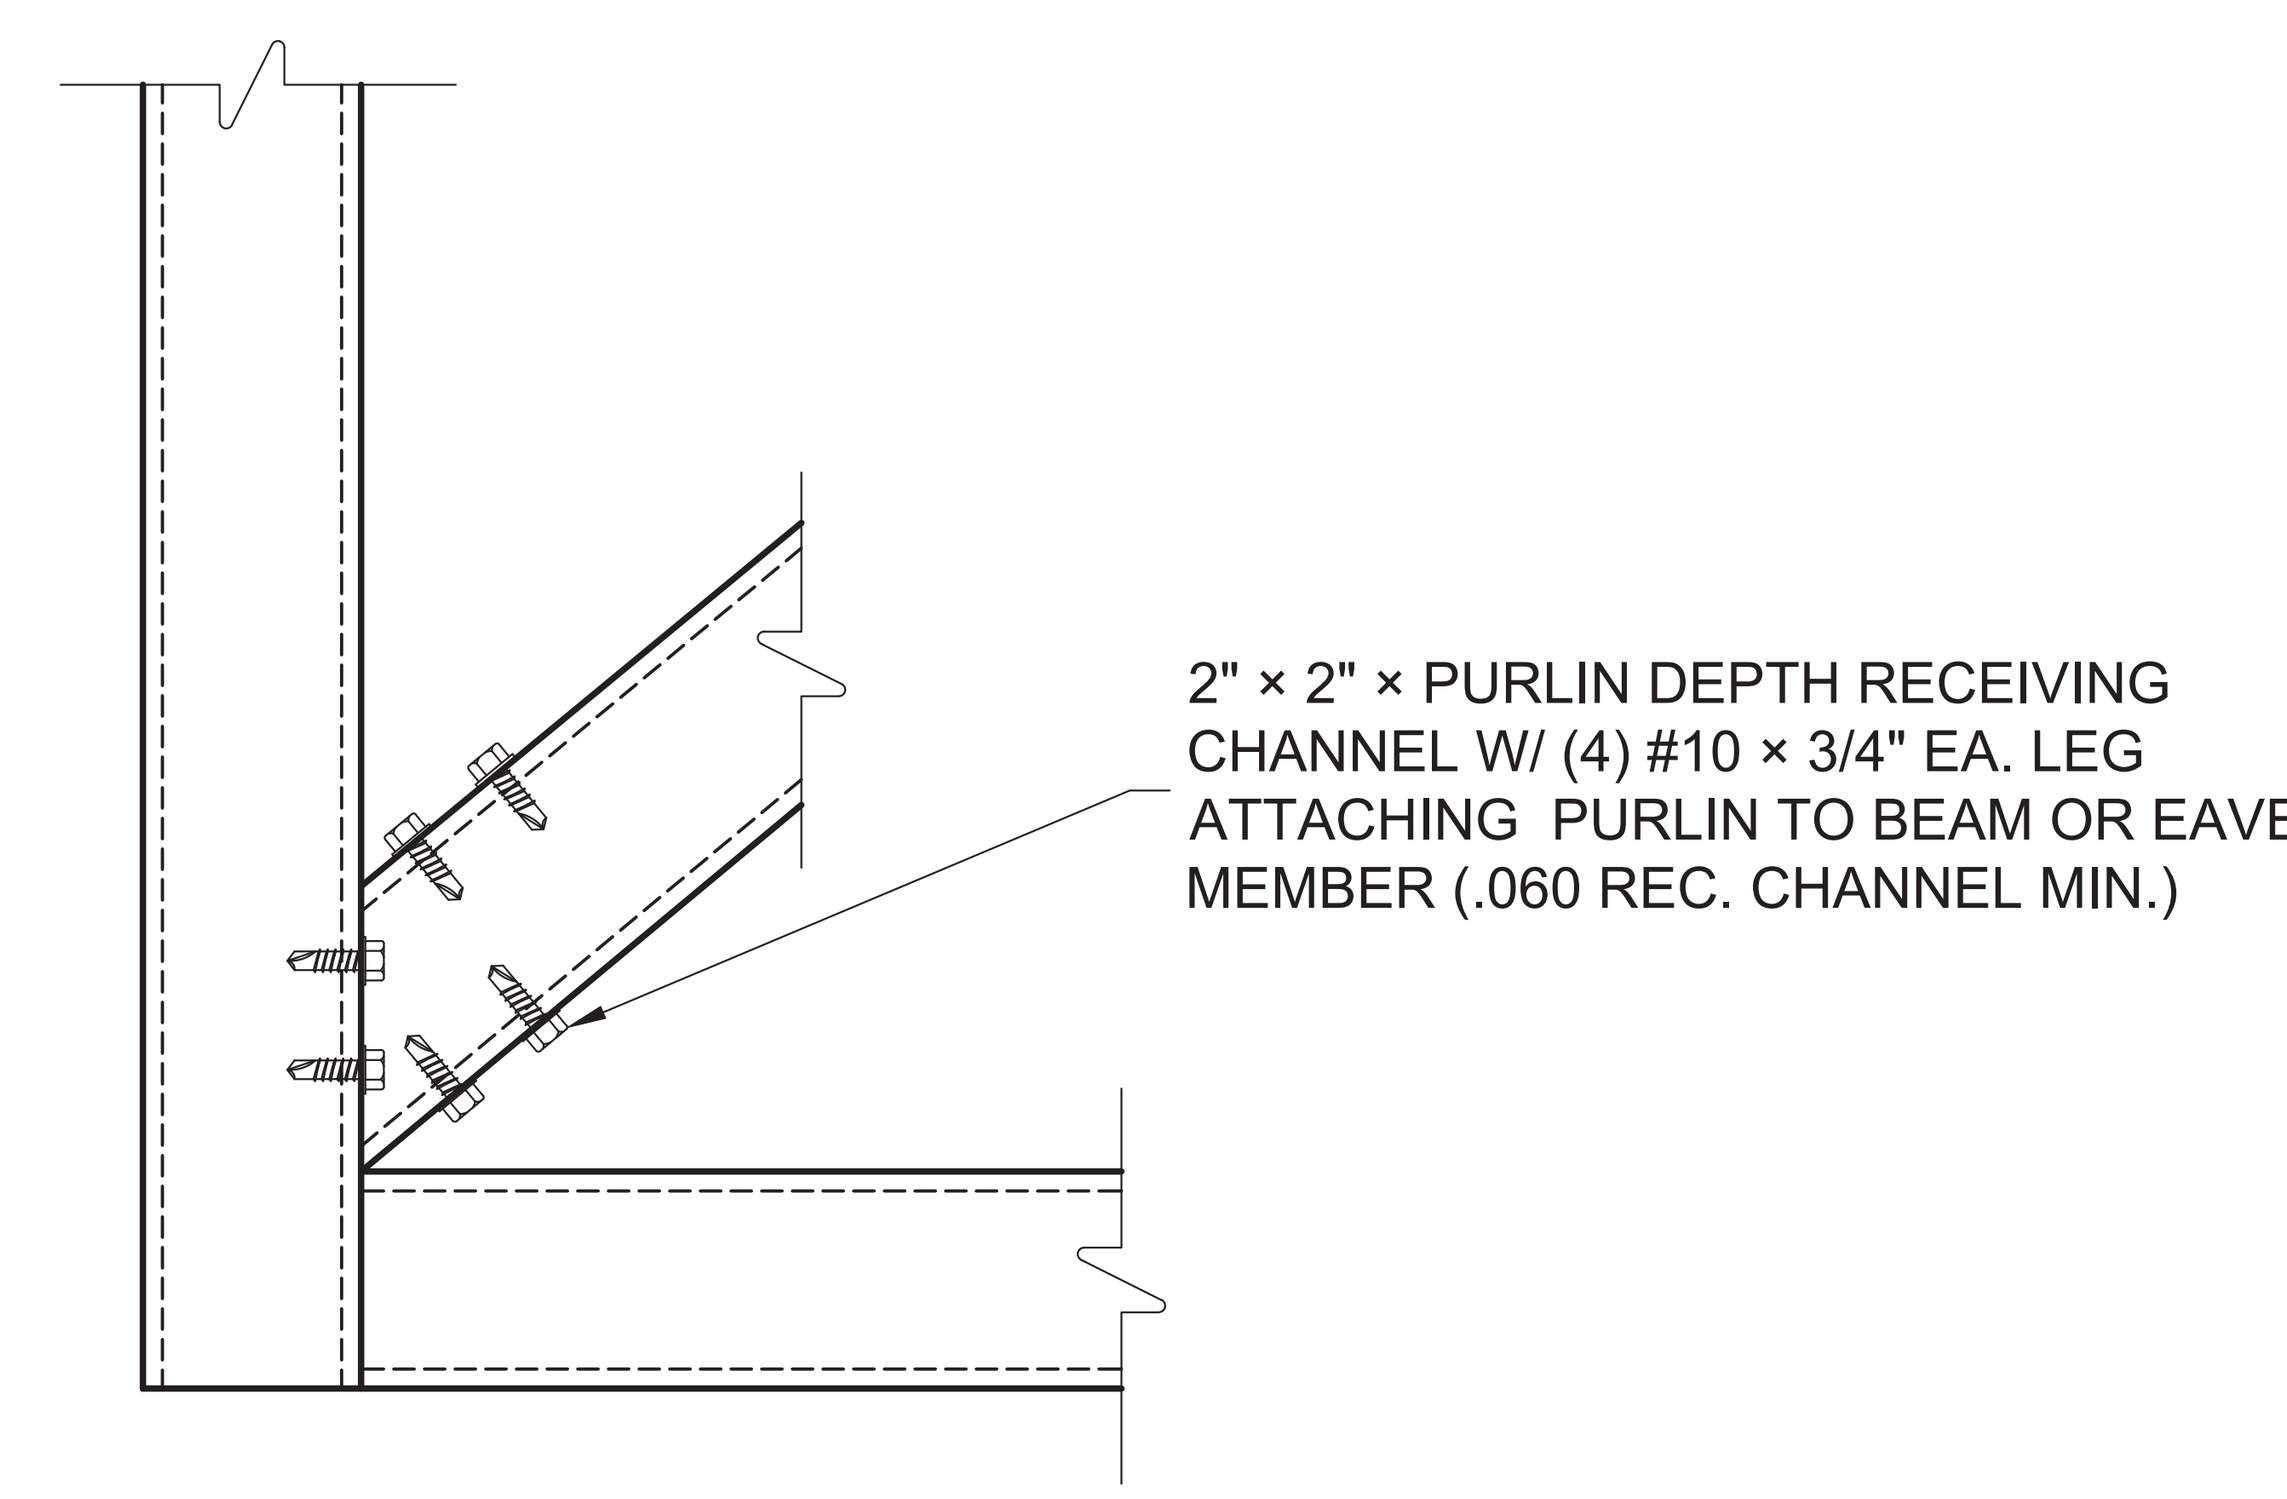

ROOF BRACING CONNECTION DETAIL
SCALE: N.T.S.

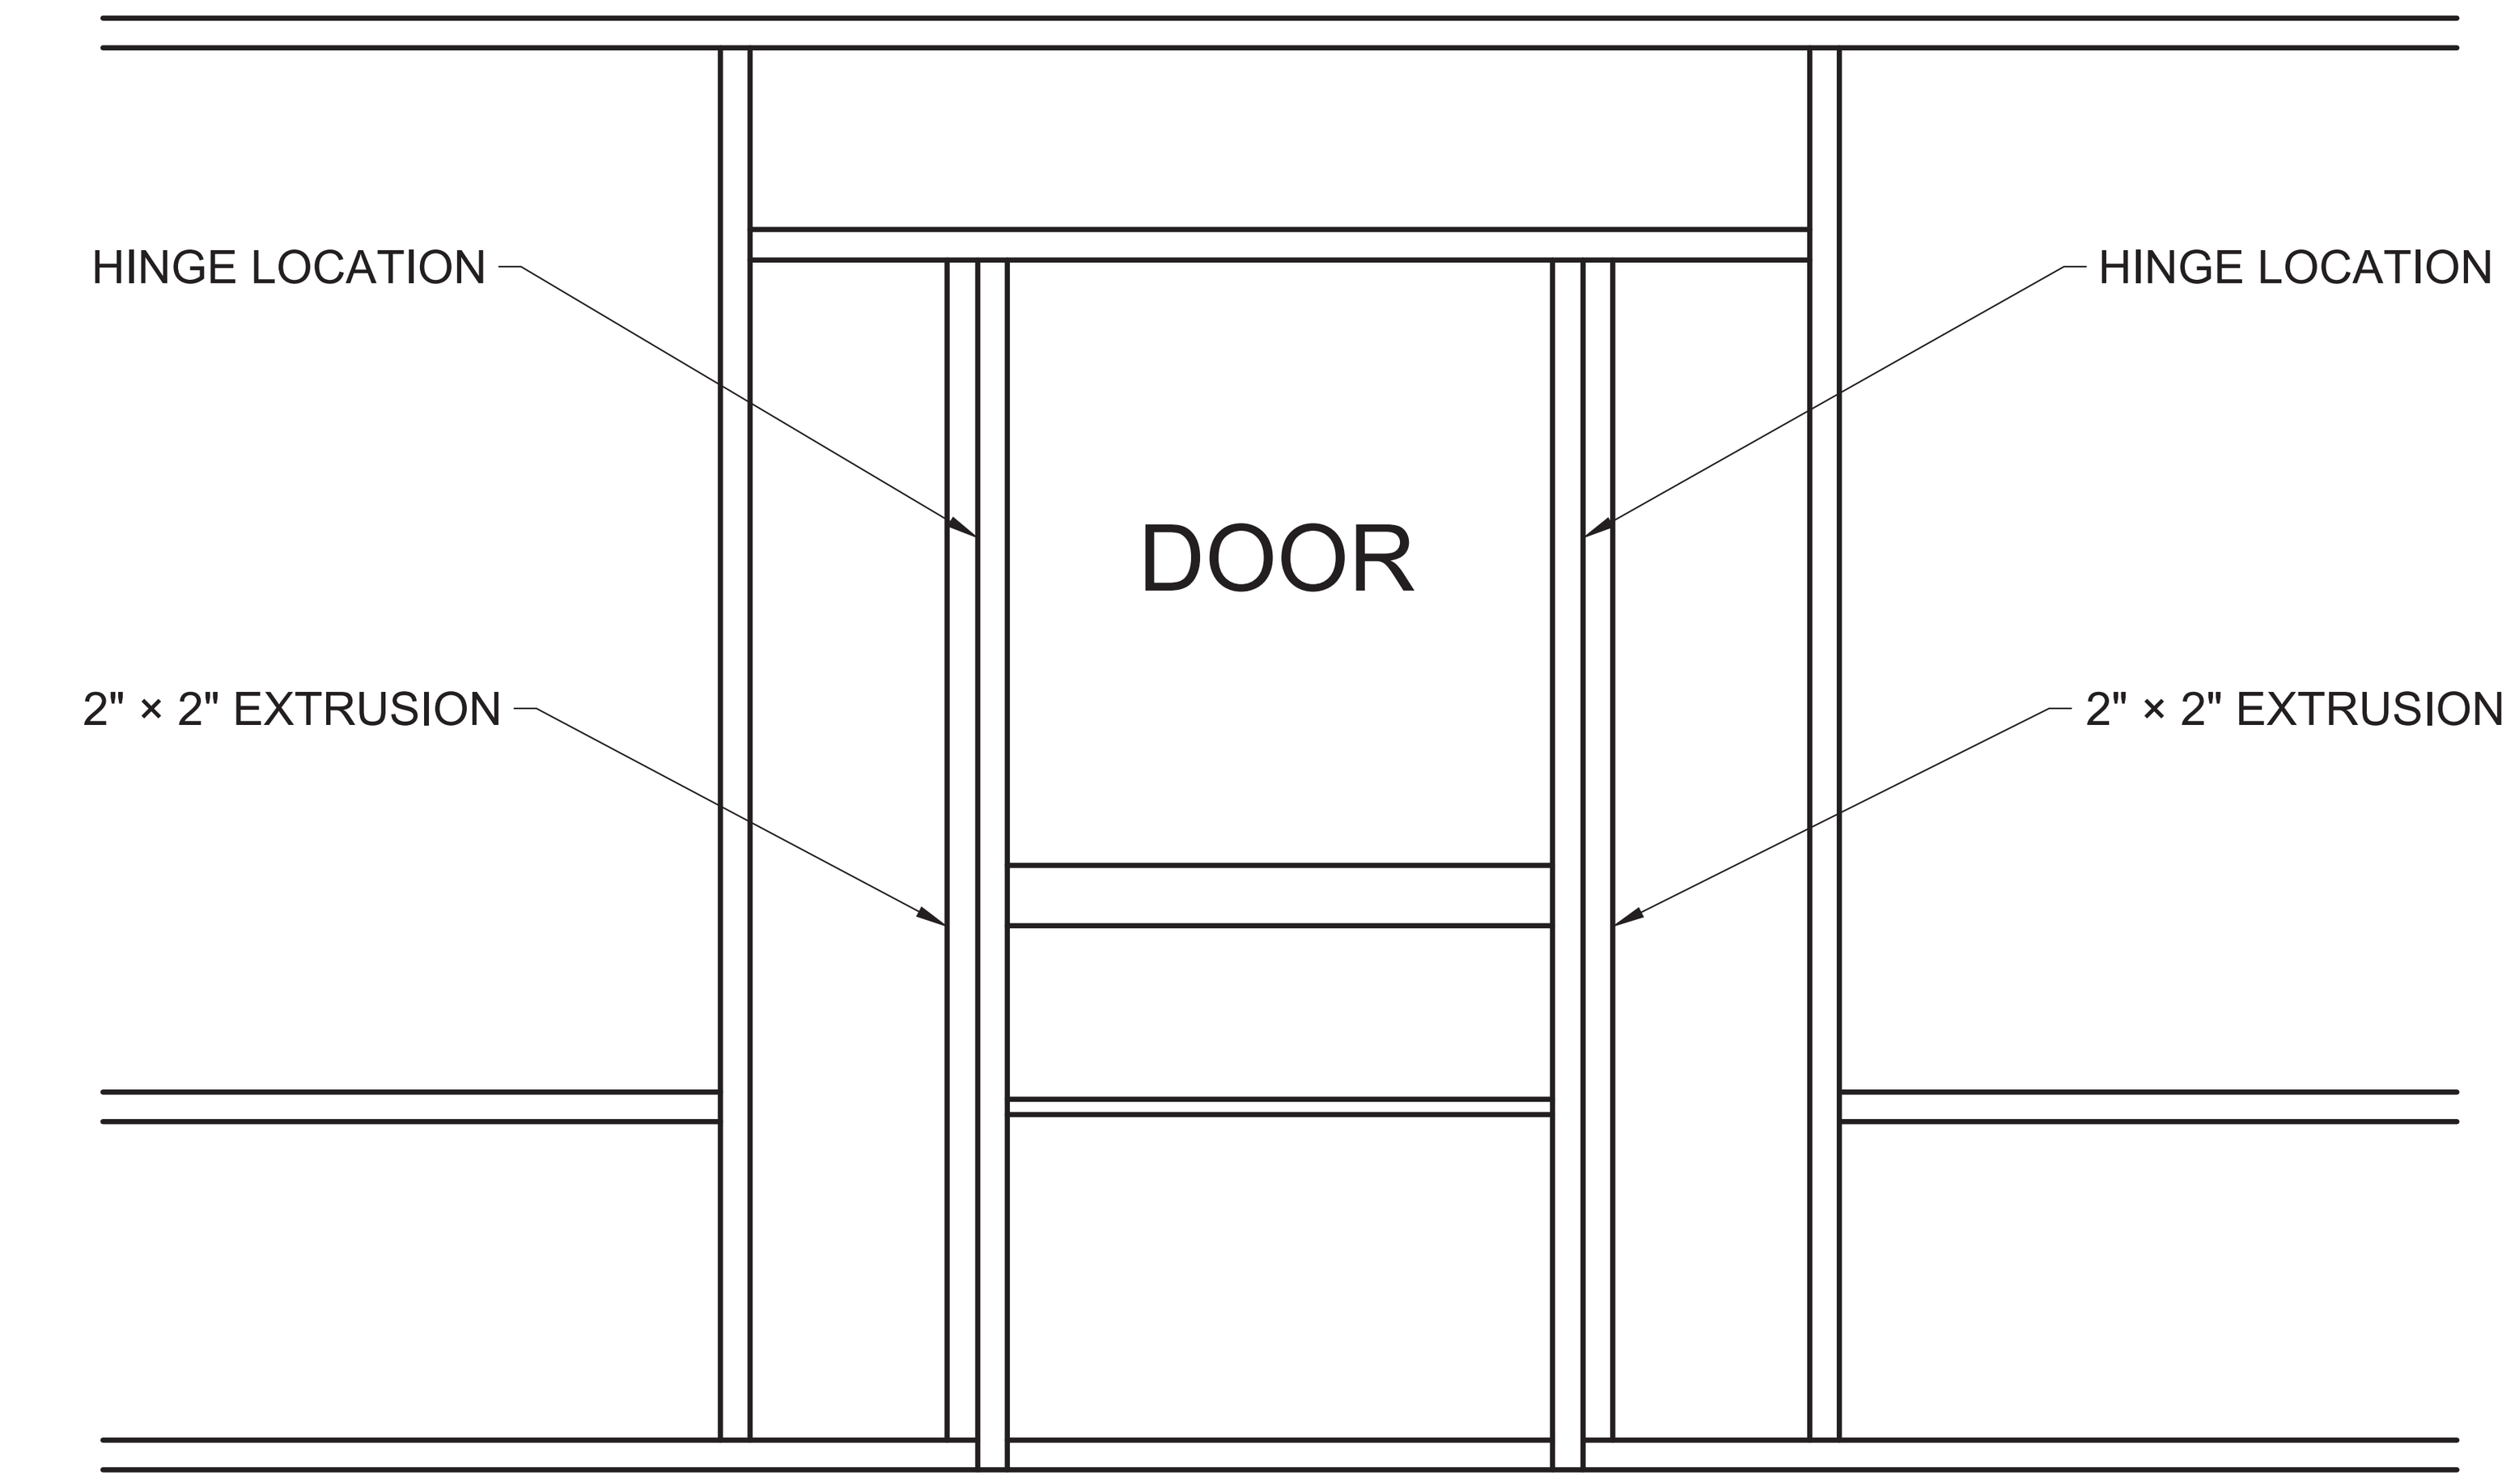

NOTES:
1. HINGES SHALL BE ATTACHED TO STRUCTURE W/ (3) #10 × 5/8" SMS MINIMUM.
2. DOOR SHALL BE ATTACHED TO ENCLOSURE W/(2) HINGES MINIMUM.
3. HINGES SHALL BE ATTACHED TO DOOR WITH (3) #10 × 5/8" SMS. FASTEN A 1" × 2" × 0.044" TO UPRIGHT W/# 12 × 1" SMS @ 12" O.C. AND WITHIN 3" FROM END OF THE UPRIGHT (IF APPLICABLE).

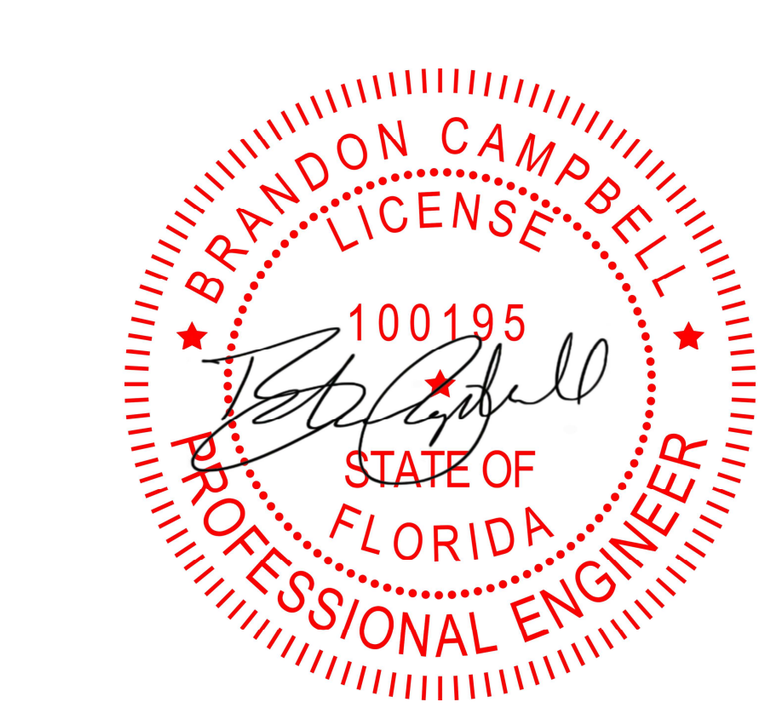

TYPICAL SCREEN DOOR CONNECTION DETAIL
SCALE: N.T.S.

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	5/28/2026

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 5/28/2026	**SHEET:** 7
DRAWING TITLE: DETAILS CONT.	
PROJECT NAME: HODGES, MICHAEL	