

A. CONCRETE & FOUNDATION DESIGN:

1. ALL CONCRETE BEAMS AND FOUNDATIONS ATTACHED TO THE HOST STRUCTURE SHALL HAVE A PRE INSPECTION.
2. SOIL BEARING PRESSURE SHALL BE A MINIMUM OF 1500 PSF. THE BEARING CAPACITY OF THE SOIL TO BE VERIFIED BY A LICENSED CONTRACTOR PRIOR TO ANY POURING OF CONCRETE.
3. ALL CONCRETE GRADE BEAMS AND FOOTINGS SHALL BE 3000 PSI MINIMUM.
4. ALL SLABS ON GRADE SHALL BE A MINIMUM OF 4" THICK WITH FIBERMESH OR WIREMESH REINFORCING.
5. ALL OVER FOUR CONCRETE FILLED SUPPORTED SLABS SHALL BE 3000 PSI MIN., 2" MIN. THICKNESS WITH EPOXY.
6. THE CONCRETE SHALL CONFORM TO ASTM C94 FOR THE FOLLOWING:
 - 6.1. OPC (PORTLAND CEMENT TYPE 1, - ASTM C 150).
 - 6.2. AGGREGATES - #6 STONE , ASTM C 33 SIZE NO. 67 LESS THAN 3/4".
 - 6.3. AIR ENTRAINING +/- 1% - ASTM C 260.
 - 6.4. WATER REDUCING AGENT - ASTM C 494.
 - 6.5. CLEAN POTABLE WATER.
 - 6.6. OTHER ADMIXTURES SHALL NOT BE PERMITTED.
7. FIBERMESH REINFORCEMENT TO BE 3000 PSI (3/4" PER CUBIC YARD MIN.) AND MEET APPROPRIATE ACI AND ASTM REQUIREMENTS.
8. METAL BARS SHALL CONFORM TO ASTM A 85.
9. ALL REINFORCING SHALL CONFORM TO ASTM A615, BE GRADE 60 (60 KSI MIN.) DEFORMED BARS, #3 BARS MAY BE GRADE 40.
10. PREPARE & PLACE CONCRETE ACCORDING TO AMERICAN CONCRETE INSTITUTE MANUAL STANDARD PRACTICE, PART 1, 2, & 3 ALONG WITH HOT WEATHER CONDITIONS RECOMMENDATIONS.
11. IF UTILIZING EXISTING CONCRETE FOR FOUNDATION, CONCRETE SHALL BE A MINIMUM OF 4" IN THICKNESS, VISIBLY FREE OF ANY STRUCTURAL EXCESSIVE CRACKING, SPALLING OR OTHER DETERIORATION.
12. CONTRACTOR TO FIELD VERIFY ANY EXISTING FOUNDATIONS NOTED ON SHEET S-1, DESIGN DATA: NOTE 10.

13.DRY PACKING/POURING IS NOT PERMITTED

B. MASONRY:

1. CONCRETE MASONRY UNITS (CMU) SHALL BE STANDARD HOLLOW UNITS AND SHALL BE 2000 PSI MINIMUM BASED ON TYPE M OR S MORTAR.
2. ALL MORTAR SHALL BE OF TYPE M OR S.
3. ALL GROUT SHALL BE 2000 PSI MINIMUM AND HAVE MAXIMUM COARSE AGGREGATE SIZE OF 3/8".
4. PROVIDE CLEAN-OUTS FOR REINFORCED CELLS CONTAINING REINFORCEMENT WHEN GROUT POUR EXCEEDS 5'-0" IN HEIGHT.

C. ALUMINUM:

1. ALL STRUCTURAL ALUMINUM SHALL CONFORM TO THE MINIMUM REQUIREMENTS OF 6005-T5 FOR ALLOY WITH A MINIMUM THICKNESS OF 0.040" FOR SUPPORTING MEMBERS.
2. ALL PLATES, ANGLES, AND CHANNELS SHALL BE 6005 T5 OR T6 ALLOY.
3. WHERE KICK PLATES ARE USED A MINIMUM THICKNESS OF 0.024" SHALL APPLY.
4. STRUCTURAL ALUMINUM DESIGN CONFORMS TO "PART 1-A - SPECIFICATIONS FOR ALUMINUM STRUCTURES - ALLOWABLE STRESS DESIGN" OR "PART 1-B - SPECIFICATIONS FOR ALUMINUM STRUCTURES - BUILDING LOAD AND RESISTANCE FACTOR DESIGN" OF THE ALUMINUM DESIGN MANUAL PREPARED BY THE ALUMINUM ASSOCIATION, INC. WASHINGTON D.C. FLORIDA BUILDING CODE EIGHTH EDITION (2023), BUILDING (CHAPTER 16 STRUCTURAL DESIGN & CHAPTER 20 ALUMINUM).
5. WHERE ALUMINUM COMES INTO CONTACT WITH STEEL, OR PRESSURE TREATED LUMBER PROVIDE DIELECTRIC SEPARATION.
6. ALUMINUM SELF MATING BEAM MEMBERS SHALL BE STITCHED WITH NO LESS THAN #10 SMS 6" FROM THE ENDS AND 12" ON CENTER, IF USING #12 SPACING MAY BE 24" ON CENTER.
7. VINYL AND ACRYLIC PANELS SHALL BE REMOVABLE. THEY SHALL BE IDENTIFIED WITH A DECAL ESSENTIALLY STATING "REMOVABLE PANEL SHALL BE REMOVED WHEN WIND SPEEDS EXCEED 75 MPH" .

DECAL SHALL BE PLACED SO IT IS VISIBLE WHEN
PANEL IS INSTALLED. VINYL AND ACRYLIC PANELS MAY
NOT BE USED IN FLOOD ZONE A.

8. 1"x2"x0.040" NON-STRUCTURAL MEMBERS SHALL BE ATTACHED TO HOST WITH 1/4"Ø X 1-3/4" EMBEDMENT & 24" O.C. MASONRY SCREW FOR CONCRETE & EQUIVALENT SIZE WOOD SCREW WHEN IN WOOD & #10X 1/2" EMBEDMENT SMS OR TEK SCREWS IN ALUMINUM MEMBERS TYPICAL.
9. ALL 5", 7", AND 9" GUTTERS SHALL BE STRUCTURAL GUTTERS

D. FASTENERS:

1. ALL LAG BOLTS SHALL CONFORM TO STAINLESS STEEL TYPE 300 18-8, WITH STANDARD FLAT WASHER UNLESS MANUFACTURER GALVANIZES BOLTS SPECIFIES FOR USE WITH ACQ PRESSURE TREATED WOOD.
2. HEX BOLTS HAS TO BE ASTM A 325, PLATED WITH STANDARD FLAT WASHERS AND NUTS.
3. ALL CONCRETE SCREWS SHALL BE, SIMPSON, HILTI, RAWL, TAPCON, REDHEAD, DYNABOLT, PORTECTOR APPROVED EQUAL.
4. ALL METAL TIES AND ASSOCIATED ACCESSORIES SHALL BE HOT DIPPED GALVANIZED.
5. ALL LAG BOLTS SHALL HAVE A MINIMUM EMBEDMENT OF 8X BOLT DIAMETER INTO STRUCTURAL FRAMING (G= 42 MIN.).
6. LAG BOLTS AND SCREWS INTO WOOD FRAMING SHALL BE PROVIDED WITH PILOT HOLES HAVING A DIAMETER NOT GREATER THAN 70 PERCENT OF THE THREAD DIAMETER OF THE BOLT OR SCREW. ALL LAG BOLTS AND SCREWS SHALL BE INSERTED IN PILOT HOLES BY TURNING AND UNDER NO CIRCUMSTANCES BY DRIVING WITH A HAMMER.
7. ALL EXPANSION ANCHORS SHALL BE DESIGNED IN ACCORDANCE WITH THE SPECIFIC MANUFACTURER'S REQUIREMENTS AND ALLOWABLE LOADS AND SHALL ONLY BE APPLIED IN CONDITIONS ACCEPTABLE TO MANUFACTURER. FASTENERS SHALL BE A MINIMUM OF SAE GRADE #5 OR BETTER ZINC PLATED.
8. ALL FASTENERS CONNECTING ALUMINUM COMPONENTS OR PRESSURE TREATED LUMBER ARE STAINLESS STEEL TYPE 300 18-8, UNLESS MANUFACTURER GALVANIZED BOLTS SPECIFIES FOR USE WITH ACQ PRESSURE TREATED WOOD, OR OTHERWISE NOTED ON PLANS.
9. ALL FASTENERS SHALL COMPLY WITH ASTM A153.
10. ALL CONNECTORS SHALL COMPLY WITH ASTM A653 CLASS G-185.
11. FOR SMS, THE MINIMUM CENTER-TO-CENTER SPACING SHALL BE 3/4" AND MINIMUM CENTER-TO-EDGE SHALL BE 1/2" UNLESS NOTED OTHERWISE.

E. REFERENCE STANDARDS: (CURRENT EDITIONS OF)

ASTM E 119
ASTM E 1300
ASCE 7
ALUMINUM DESIGN MANUAL-AA ASM35, AND SPEC. FOR
ALUMINUM PART 1-A, & 1-B
ASTM C94
ASTM C150
ASTM C33
ASTM C260
ASTM C494
ASTM A615
ASTM A185
FLORIDA BUILDING CODE EIGHTH EDITION (2023).
BUILDING
FLORIDA BUILDING CODE EIGHTH EDITION (2023).
RESIDENTIAL
FLORIDA BUILDING CODE EIGHTH EDITION (2023).
EXISTING
HUD CODE

F. ABBREVIATIONS:

THE FOLLOWING LIST OF ABBREVIATIONS IS NOT INTENDED TO REPRESENT ALL THOSE USED ON THESE DRAWINGS, BUT TO SUPPLEMENT THE MORE COMMON ABBREVIATIONS.

1. TYP -- TYPICAL
2. SIM -- SIMILAR
3. UON -- UNLESS OTHERWISE NOTED
4. CONT -- CONTINUOUS
5. VIF -- VERIFY IN FIELD
6. SMB -- SELF MATING BEAM
7. FSM -- FLORIDA SALES AND MARKETING
8. REC -- RECEIVING CHANNEL

G. RESPONSIBILITY:

1. ALL SITE WORK SHALL BE PERFORMED BY A LICENSED CONTRACTOR IN ACCORDANCE WITH APPLICABLE BUILDING CODES, LOCAL ORDINANCES, ETC.
2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND DETAILS, NOTIFYING ENGINEER OF ANY DISCREPANCIES BETWEEN DRAWINGS, FABRICATED ITEMS, OR ACTUAL FIELD CONDITIONS.
3. ALL DETAILS ON THESE DRAWINGS ARE ENGINEERED BASED ON INFORMATION PROVIDED BY THE CONTRACTOR AND/OR MANUFACTURER.
4. ANY DETAILS NOT SHOWN ARE TO BE ENGINEERED BY A LICENSED P.E. IN ACCORDANCE WITH STANDARD ENGINEERING PRACTICES.
5. WHEN ATTACHING TO FASCIA, THE HOST STRUCTURE SHALL HAVE AT LEAST A 2"x4" FASCIA AND ROOF TRUSS SYSTEM. CONTRACTOR SHALL VERIFY THIS AND IF SMALLER, CONTRACTOR SHALL BRING STRUCTURE UP TO A 2"x4" FASCIA AND ENSURE LESS THAN A 2'-0" OVERHANG.
6. FBC PLANS & ENGINEERING SERVICES INC. DOES NOT WARRANT, EITHER EXPRESSLY OR IMPLIED, THE QUALITY OF THE CONSTRUCTION, AND IS NOT RESPONSIBLE FOR THE INTERPRETATION OF DESIGNS AND END USE BY THE CLIENT/CONTRACTOR.
7. CONTRACTOR TO VERIFY FEMA FLOOD ZONE OF THE PROPOSED STRUCTURE LOCATION TO ENSURE STRUCTURE IS NOT WITHIN SPECIAL FLOOD HAZARD AREAS.

H. MISCELLANEOUS:

1. ALUMINUM ADDITIONS ARE NOT TO BE INSTALLED ON A MANUFACTURED HOME, TRAILER HOME, OR PRE-FAB HOME. IF NO HOST BEAM IS PRESENT, A SEPARATE 4TH WALL SUPPORT SYSTEM MUST BE ENGINEERED TO ENSURE NO ADDITIONAL LOADING IS PLACED ON THE MANUFACTURED HOME.
2. IF ENCLOSURE CONTAINS A SWIMMING POOL OR SPA, THE ENCLOSURE SHALL COMPLY WITH RESIDENTIAL SWIMMING BARRIER REQUIREMENTS OF FLORIDA BUILDING CODE EIGHTH EDITION (2023), RESIDENTIAL R 4501.17 IN ITS ENTIRETY.
3. DOOR LOCATIONS MAY BE DETERMINED IN THE FIELD BY CONTRACTOR.
4. IF PAVERS ARE UNDER ALUMINUM MEMBERS THEY SHALL HAVE EPOXY ADHESIVE TO CONCRETE OR IF USING GROUT, ENSURE BONDING AGENT IS USED FIRST AND ADHERED WITH MINIMUM 3000 PSI GROUT.
5. SCREENING MATERIAL SHALL BE 18X14X0.013 OR EQUIVALENT DENSITY SCREEN MESH ONLY UNLESS NOTED ON DRAWING S-2.
6. ALL STRUCTURAL POST SHALL BE ANCHORED TO AN EXISTING/PROPOSED CONCRETE FOUNDATION FOR UPLIFT PURPOSES.
7. CONTRACTOR TO ENSURE ALL PROPOSED GUTTERS HAVE A POSITIVE FLOW.
8. EMERGENCY ESCAPE & RESCUE OPENING PER FBC R310.1 SHALL BE VERIFIED BY CONTRACTOR & BUILDING OFFICIAL.
9. ENCLOSED ADDITIONS TO MANUFACTURED HOMES SHALL NOT CHANGE THE EXIT FACILITIES FOR EGRESS PER HUD 3280.105, (A) THROUGH (A)(2)(IV), SO THAT THE DISTANCE TO EXIT DIRECTLY OUTSIDE FROM ALL BEDROOMS IS LESS THAN 35', AND, SO THAT TWO EXIT DIRECTLY OUTSIDE ARE STILL MAINTAINED. A CARPORT OR SCREEN ROOM SHALL BE CONSIDERED AS OUTSIDE. NON-HABITABLE SUNROOMS OR HABITABLE LIVING SPACE MAY BE ADDED WHERE AN EXIT DOOR WAS LOCATED AS LONG AS A NEW EXIT DOOR IS ADDED AND MEETS THE REQUIREMENTS OF HUD 3280.105.
10. AWS CERTIFIED WELDER REQUIRED FOR ALL WELDING.

SCREEN ENCLOSURE

DESIGN DATA: (SITE SPECIFIC DESIGN INFORMATION)

- | | |
|--|---------|
| 1. ULTIMATE DESIGN WIND SPEED Vult, (3 SECOND GUST): | 150 MPH |
| NOMINAL DESIGN WIND SPEED Vasd: | 116 MPH |
| 2. RISK CATEGORY: | 1 |
| 3. WIND EXPOSURE: | C |
| 4. WIND LOADS: | |
| SCREEN ROOF: | 12 PSF |
| SCREEN WALLS (WINDWARD): | 43 PSF |
| SCREEN WALLS (LEEWARD): | 34 PSF |
| SOLID ROOF: | N/A |
| 5. FACTOR APPLIED TO SCREEN WIND LOADS FOR 18/14: | 0.88 |
| FACTOR APPLIED TO SCREEN WIND LOADS FOR 20/20: | 1.0 |
| MESH TYPE AND LOCATION SHOWN ON S-2 | |
| FACTORS FOR OTHER SCREEN MESHES TO BE DETERMINED BY THE ENGINEER | |
| 6. FACTOR APPLIED TO SCREEN WIND LOADS FOR ALLOWABLE STRESS DESIGN: | 0.6 |
| 7. LIVE LOAD: | |
| 300 lb. VERTICAL DOWNLOAD ON PRIMARY SCREEN ENCLOSURE MEMBERS. | |
| 200 lb. VERTICAL DOWNLOAD ON SCREEN ENCLOSURE PURRLINS. | |
| 8. SCREEN ROOF TYPE: MANSARD | |
| 9. NON-SCREEN ROOF TYPE: N/A | |
| 10. PROPOSED FOUNDATION (SEE S-2 FOR SIZE AND LOCATION) SHALL BE ADEQUATE TO RESIST THE UPLOADS FOR THE PROPOSED STRUCTURE | |

HOLLOW SECTIONS

2 X 2:-----	2" X 2" X 0.044"
2 X 3:-----	2" X 3" X 0.050"
2 X 4:-----	2" X 4" X 0.050"
2 X 5:-----	2" X 5" X 0.050"
3 X 3:-----	3" X 3" X 0.125"

OPEN BACK SECTIONS

1 X 2:-----1" X 2" X 0.040"
1 X 3:-----1" X 3" X 0.045"

SNAP SECTIONS

2 X 2 SMS:-----	2" X 2" X 0.045"
2 X 3 SMS:-----	2" X 3" X 0.072"
2 X 4 SMS:-----	2" X 4" X 0.045"
3 X 3 SMS:-----	3" X 3" X 0.090"

SELF MATING (SMB)

2 X 4 SMB:	2" X 4" X 0.044" X 0.100"
2 X 5 SMB:	2" X 5" X 0.050" X 0.118"
2 X 6 SMB:	2" X 6" X 0.050" X 0.120"
2 X 7 SMB:	2" X 7" X 0.057" X 0.120"
2 X 8 SMB:	2" X 8" X 0.072" X 0.224"
2 X 9 SMB:	2" X 9" X 0.072" X 0.224"
2 X 10 SMB:	2" X 10" X 0.092" X 0.374"

TUBE SECTIONS

2 X 2:-----2" X 2" X 0.090"

BB | T


INDEX

NOTES
DRAWING
DETAILS
DETAILS
DETAILS
DETAILS

S-1
S-2
S-3
S-4
S-5
S-6

Freedom Code Compliance
Private Provider Firm or Associated Duty Authorized Representative
Plan reviewed for compliance with Florida Building Code
Not including zoning, fire, or public works compliance.
Plan Not Altered In Any Way

 **FREEDOM**
CODE COMPLIANCE

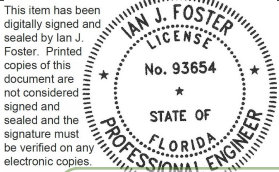

Digitally signed by
3/31/2026 20260308603

Date: 2026.03.16

16:59:21 -04'00'

S-1					
NOTES					
JOB NUMBER:	26_0121_685_TEDFORD_REPLACEMENTC		PROJECT	TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224	
	DRAW DATE: 01/23/2026		CONTRACTOR	REPLACE MY CAGE 6301 PORTER ROAD UNIT 12 SARASOTA, FL 34240	
	REVISION 1:				
	REVISION 2:				
	REVISION 3:				
FBC PLANS & ENGINEERING SERVICES, INC.  FLORIDA BUILDING CODE PLANS & ENGINEERING SERVICE, INC			ADDRESS: 5344 9th Street Zephyrhills, FL 33542 PHONE: (813)838-0735 FAX: 1-(866)824-7894 E-MAIL: erb@fbcpplans.com WEBSITE: www.fbcpplans.com C.O.A.: #29054		
			P.E. OF RECORD DAVID W. SMITH FL 53608 THOMAS L. HANSON FL 38654 IAN J. FOSTER FL 93654 JOEL FALARDEAU FL 70667 ERIK STUART FL 77605		
PROFESSIONAL ENGINEER SEAL					

Freedom Code Compliance
Private Provider Firm or Associated Duty Authorized Representative
Plan reviewed for compliance with Florida Building Code
Not including zoning, fire, or public works compliance.
Plan Not Altered in Any Way

 **FREEDOM**
CODE COMPLIANCE


This item has been digitally signed and sealed by Ian J. Foster. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.



The seal is circular with a double-lined border. The outer ring contains the text "IAN J. FOSTER" at the top and "PROFESSIONAL ENGINEER" at the bottom, separated by two stars. The inner circle contains the text "LICENSE" at the top, "No. 93654" in the center, and "STATE OF FLORIDA" at the bottom, also separated by two stars.

Digitally signed by Ian J Foster
3/31/2026 20260308603


16:59:30 -04'00'

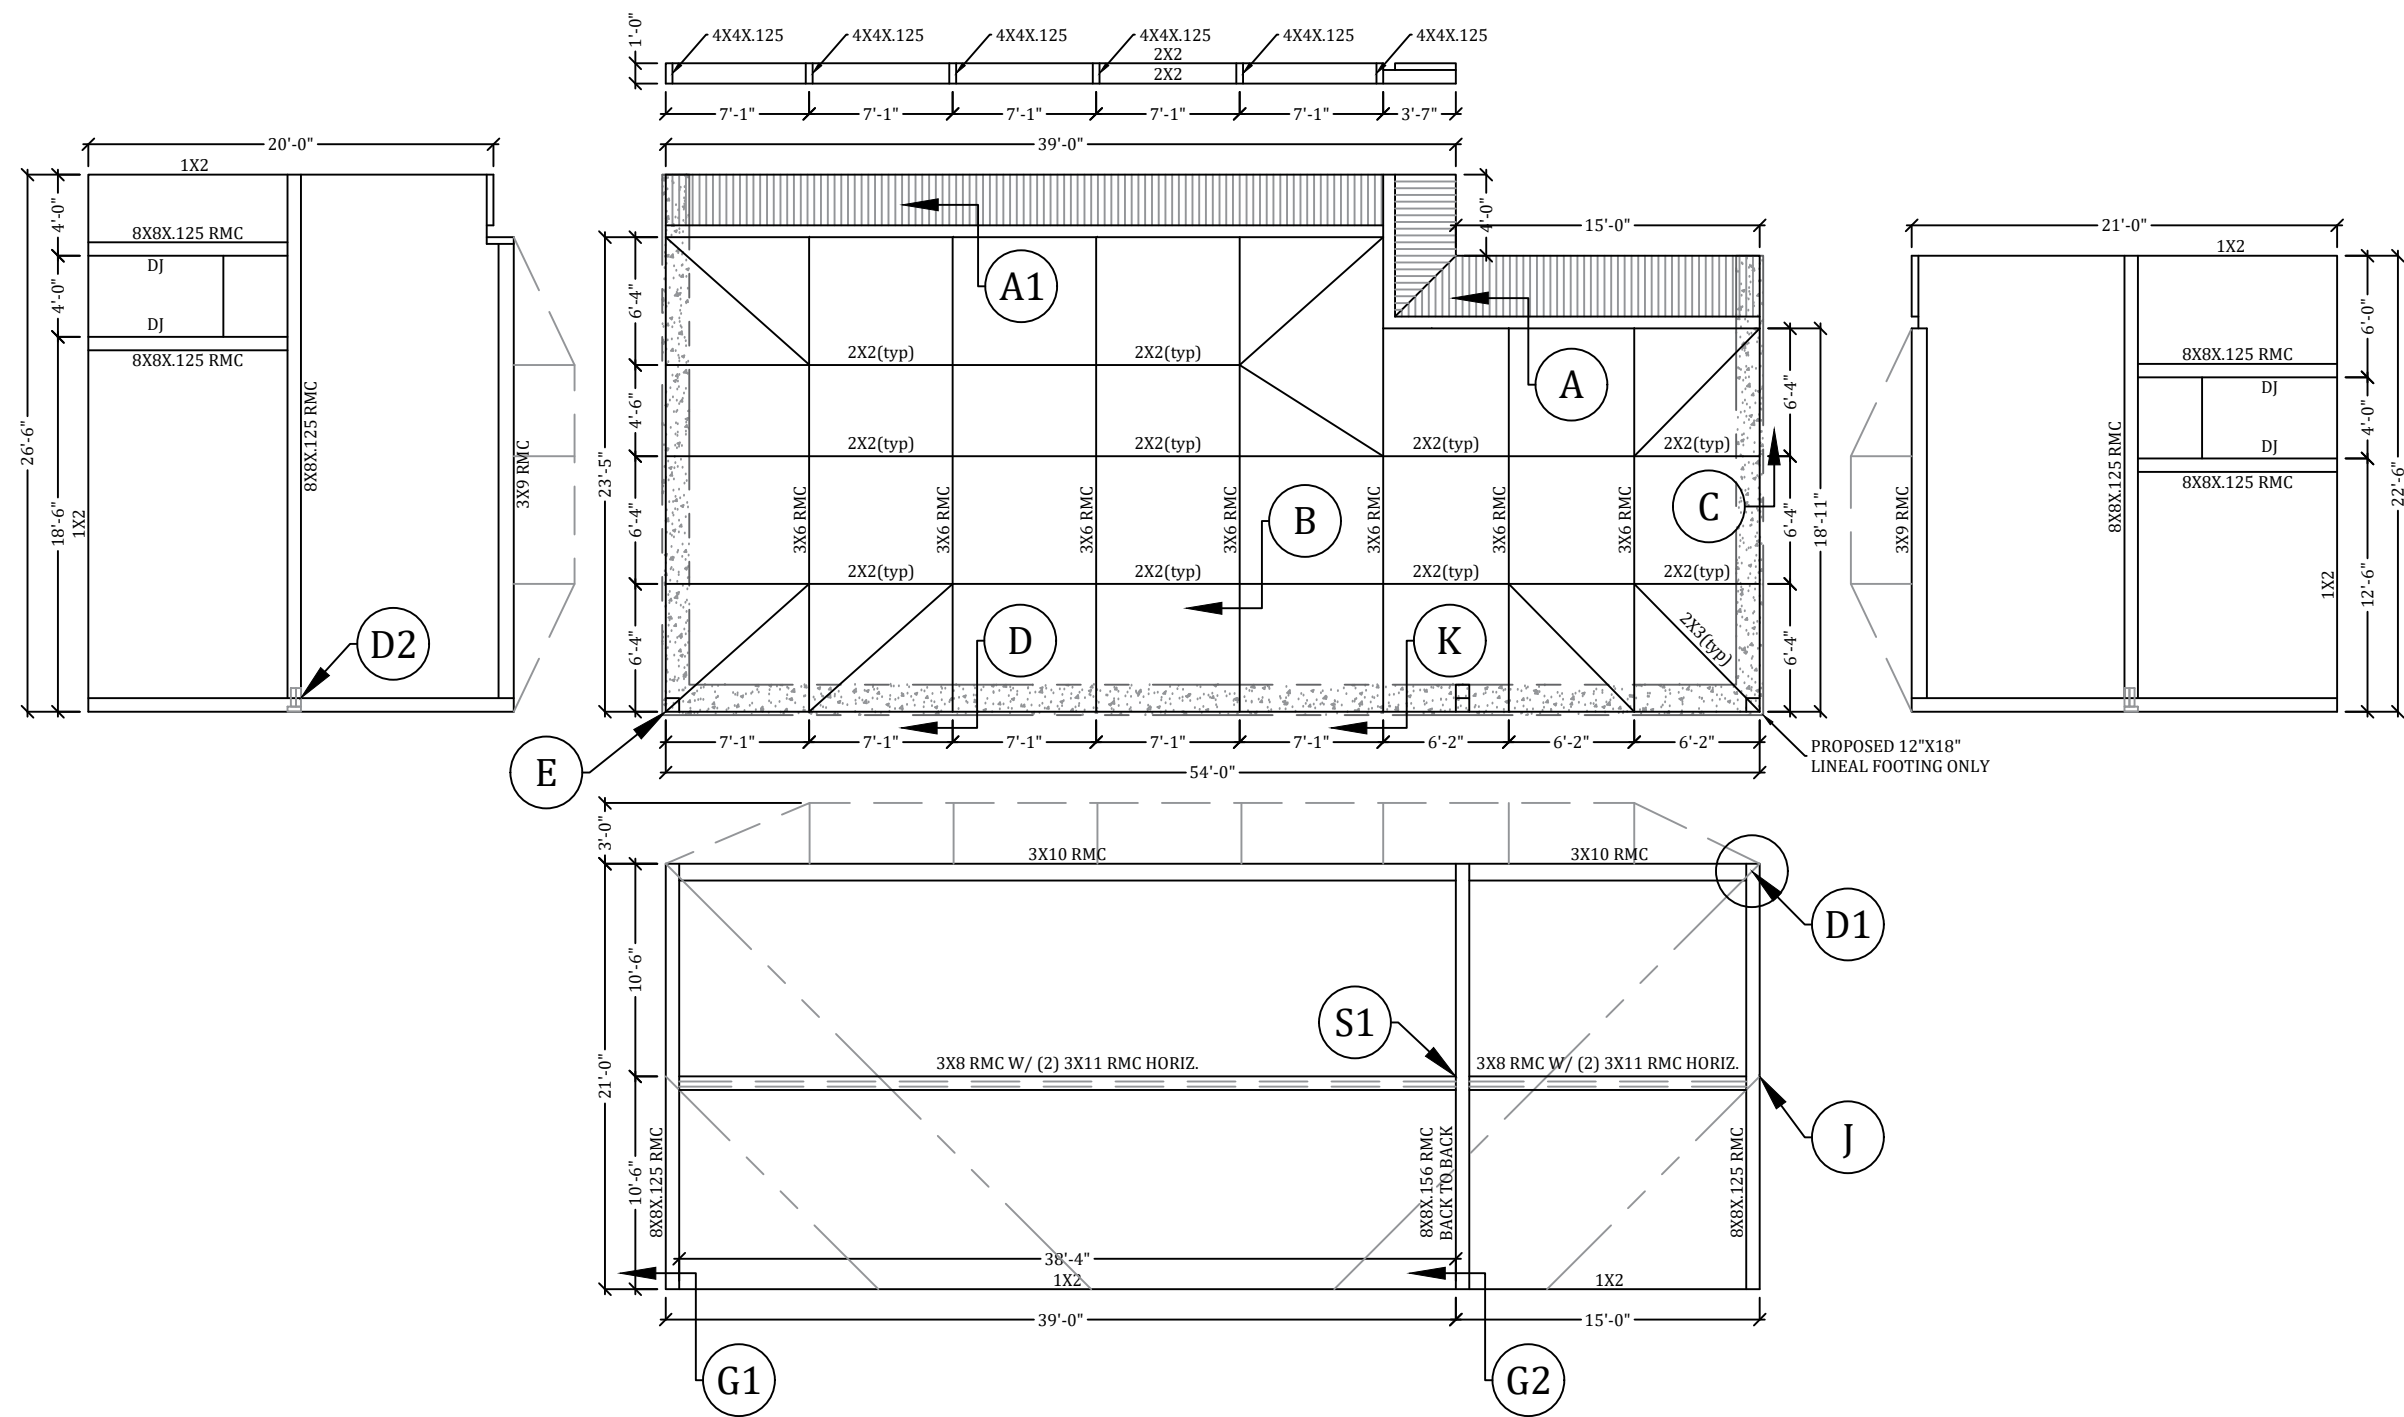

JOB NUMBER: 26_0121_685_TEDFORD REPLACEMENT		PROJECT TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224	 FBC PLANS & ENGINEERING SERVICES, INC.	P.E. OF RECORD DAVID W. SMITH FL 53608	PROFESSIONAL ENGINEER SEAL
JOB NUMBER:	DRAW DATE: 01/23/2026	CONTRACTOR REPLACE MY CAGE 6301 PORTER ROAD UNIT 12 SARASOTA, FL 34240	ADDRESS: 5344 9th Street Zephyrhills, FL 33542 PHONE: (813)838-0735 FAX: 1-(866)824-7894 E-MAIL: erb@fbclplans.com WEBSITE: www.fbclplans.com C.O.A.: #29054	THOMAS L. HANSON FL 38654	
	REVISION 1:			IAN J. FOSTER FL 93654	
	REVISION 2:			JOEL FALARDEAU FL 70667	
	REVISION 3:			ERIK STUART FL 77605	
DRAWING			S-2		



D

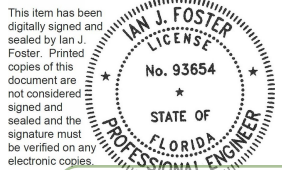


Digitally signed by
Ian J Foster

Date: 2026.03.16

16:59:37 -04'00'


FBBC PLANS & ENGINEERING SERVICES, INC.	 Florida Building Code PLANS & ENGINEERING SERVICES, INC.	ADDRESS: 5344 9th Street Zephyrhills, FL 33542 PHONE: (813)838-0735 FAX: 1-(866)824-7894 E-MAIL: erb@fbcpplans.com WEBSITE: www.fbcpplans.com C.O.A.: #29054	P.E. OF RECORD	
			DAVID W. SMITH	FL 53608
			THOMAS L. HANSON	FL 38654
			IAN J. FOSTER	FL 93654
			JOEL FALARDEAU	FL 70667
			ERIK STUART	FL 77605

S-3	DETAILS		
	JOB NUMBER: 26_0121_685_TEDFORD REPLACEMENT	PROJECT TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224	
		CONTRACTOR REPLACE MY CAGE 6301 PORTER ROAD UNIT 12 SARASOTA, FL 34240	
		DRAW DATE: 01/23/2026	REVISION 1: REVISION 2: REVISION 3:

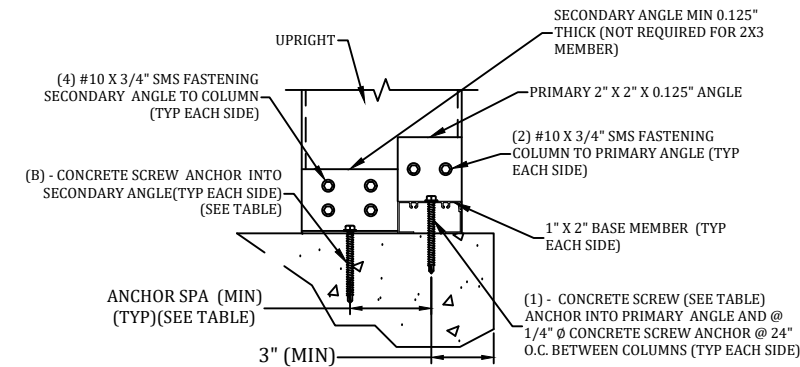


- NOTES:
1. NUMBER OF ANCHORS "B" IS EACH SIDE INTO THE SECONDARY ANGLE AND DOES NOT INCLUDE THE ANCHOR INTO THE 1X2.
 2. MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
 3. CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON THOSE LISTED ON S-1, D. FASTENERS, OTHER BRAND & TYPE SHALL BE APPROVED BY ENGINEER.
 4. 2X3W/1X2 CORNER POST SHALL REQUIRE SAME BASE CONNECTIONS AS 2X4 SHOWN IN TABLE.
 5. IF FOR AN IN-FILL, TOP OF COLUMN CONNECTION SIMILAR IF CONCRETE LINTEL.
 6. IF WOOD LINTEL/DECK, DOUBLE LEDGE REQUIRED (MIN. 3 5/8") MAY SUBSTITUTE LAG SCREW FOR LDT FOR BOTH PRIMARY & SECONDARY ANGLES.
 7. 2X2X.045 DOOR JAMB MEMBER SHALL CONNECT SIMILAR TO 2X3 MEMBER.
 8. SEE S-1, DESIGN DATA: NOTE 10 FOR FOUNDATION INFORMATION.


G 2" X 3" OR LARGER UPRIGHT TO CONCRETE W/NO PAVER
DETAILS
SCALE: N.T.S.

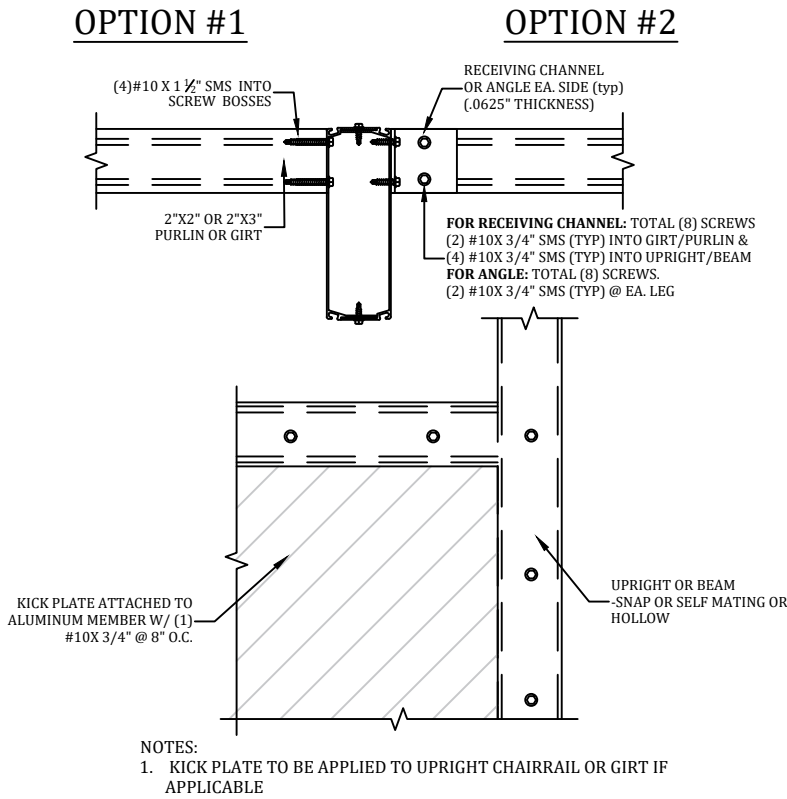


H PURLIN OR GIRT TO BEAM OR POST DETAIL
SCALE: N.T.S.

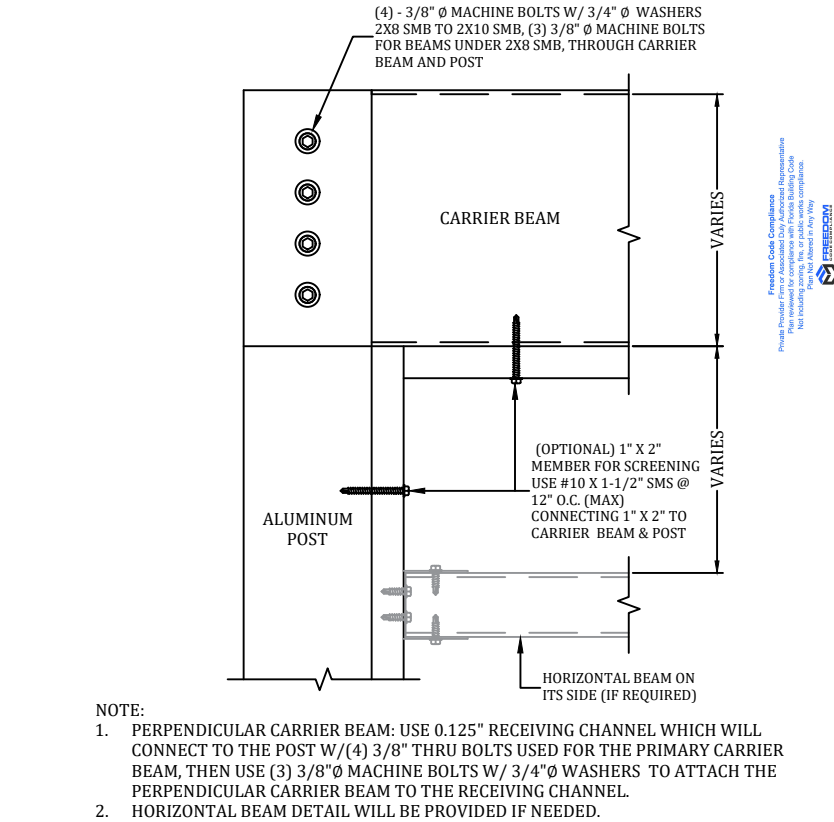

D1 BEAM TO POST DETAIL
SCALE: N.T.S.

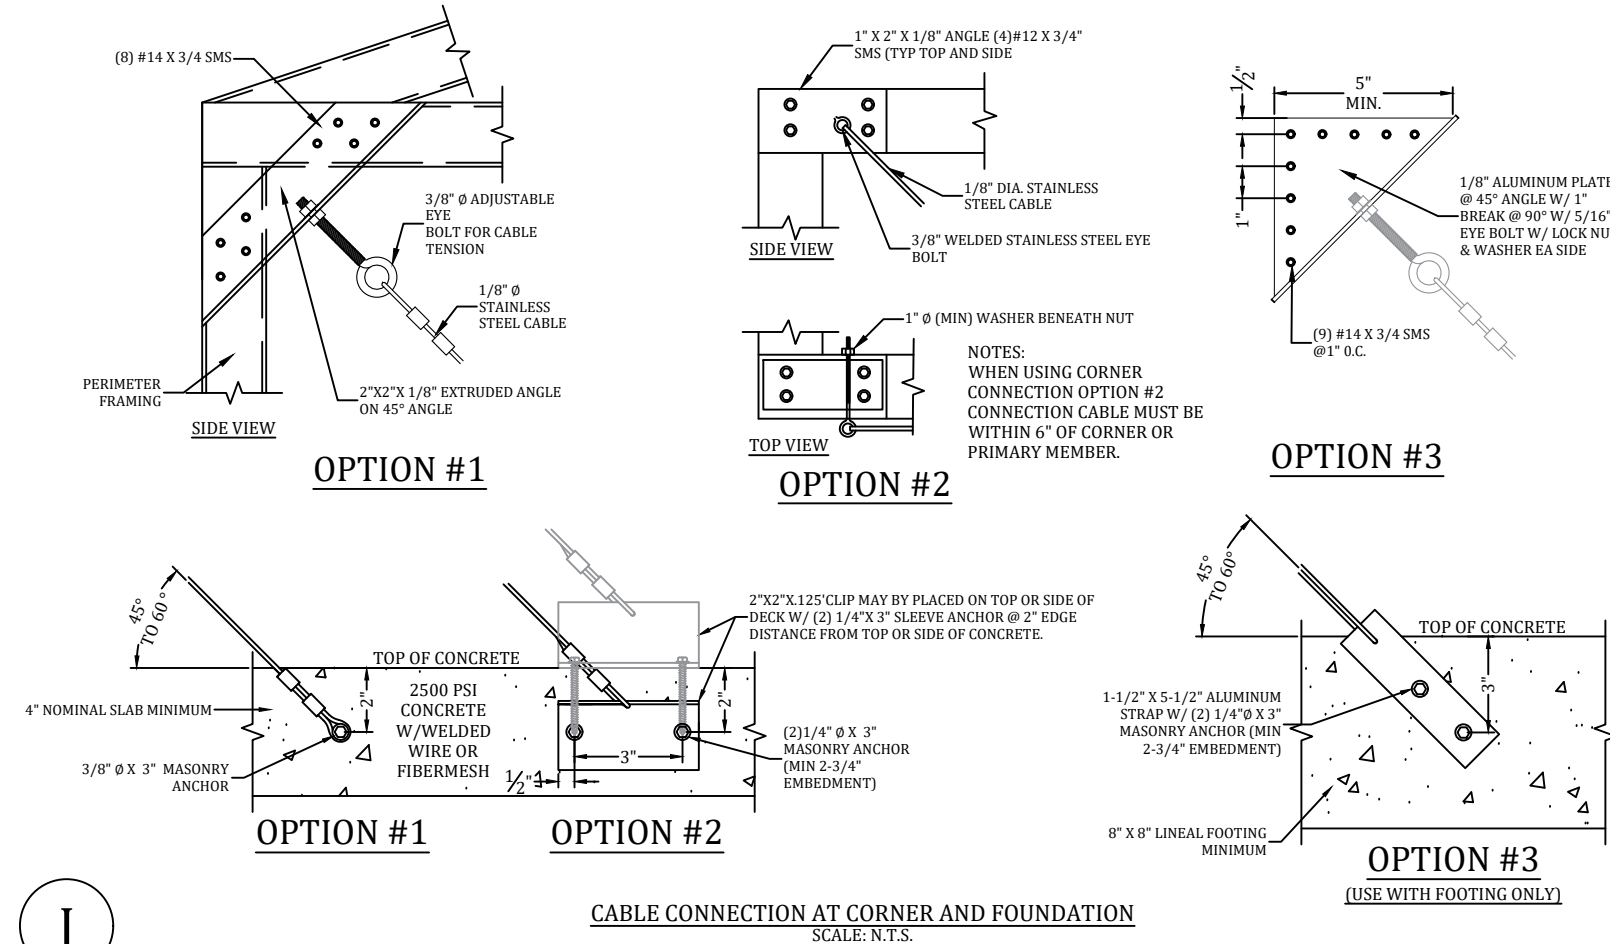

J CABLE CONNECTION AT CORNER AND FOUNDATION
SCALE: N.T.S.

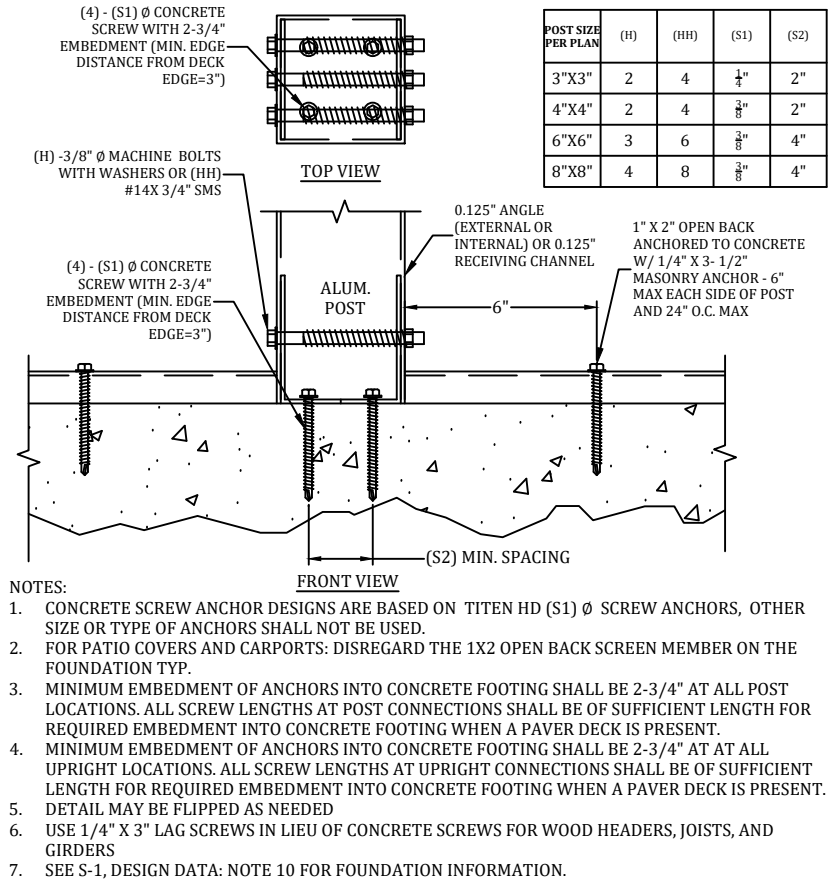

G1 ALUM. POST CONNECTION DETAIL
SCALE: N.T.S.

This item has been digitally signed and sealed by Ian J. Foster. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

IAN J. FOSTER
PROFESSIONAL ENGINEER
No. 93654
STATE OF FLORIDA

REVIEWER FOR CODE COMPLIANCE
3/1/2026 20260308603

Digitally signed by
Ian J Foster
Date: 2026.03.16
16:59:43 -04'00'

PROFESSIONAL ENGINEER SEAL

P.E. OF RECORD	DAVID W. SMITH	FL 53608	THOMAS L. HANSON	FL 38654	IAN J. FOSTER	FL 93654	JOEL FALARDEAU	FL 70667	ERIK STUART	FL 77605
----------------	----------------	----------	------------------	----------	---------------	----------	----------------	----------	-------------	----------

FBC PLANS & ENGINEERING SERVICES, INC.

ADDRESS: 5344 9th Street
Zephyrhills, FL 33542
PHONE: (813)838-0735
FAX: 1-(866)824-7894
E-MAIL: erb@fbcplans.com
WEBSITE: www.fbcplans.com
C.O.A.: #29054

Florida Building Code
PLANS & ENGINEERING SERVICES, INC.

PROJECT
TEDFORD
7064 BAYPINE LN
ENGLEWOOD, FL 34224

CONTRACTOR
REPLACE MY CAGE
6301 PORTER ROAD
SARASOTA, FL 34240
UNIT 12

JOB NUMBER:
26_0121_685_TEDFORD REPLACEMENT

DRAW DATE: 01/23/2026

REVISION 1:


REVISION 2:

REVISION 3:

DETAILS

S-4


D2

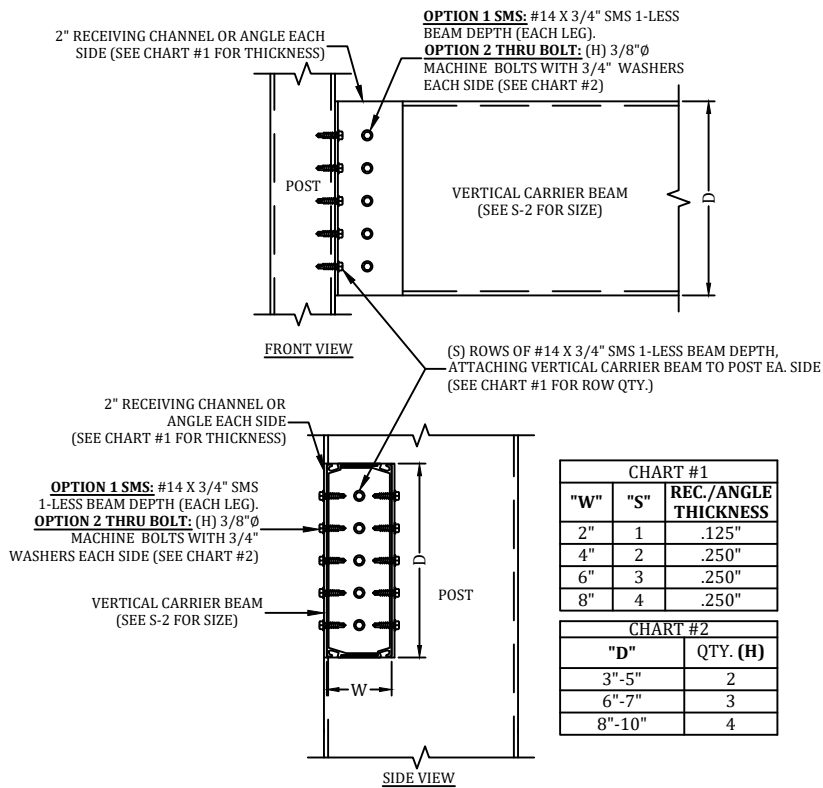

- NOTES:
- DETAIL SHOWS AN EXAMPLE OF A 2X6SMB POST W/ A 2X6SMB VERTICAL CARRIER BEAM
 - "W" IS THE WIDTH OF THE VERTICAL CARRIER IN INCHES
 - "D" IS THE HEIGHT OF THE VERTICAL CARRIER IN INCHES


BEAM TO POST DETAIL
SCALE: N.T.S.

A1

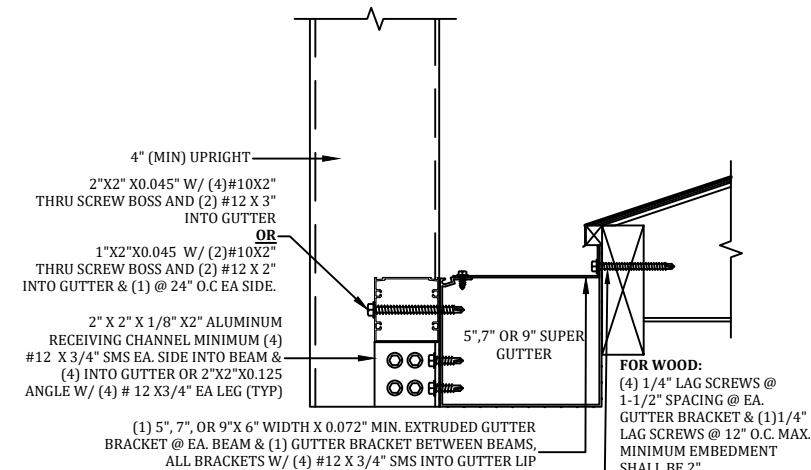

TRANSOM TO SUPER GUTTER DETAIL
SCALE: N.T.S.


G2

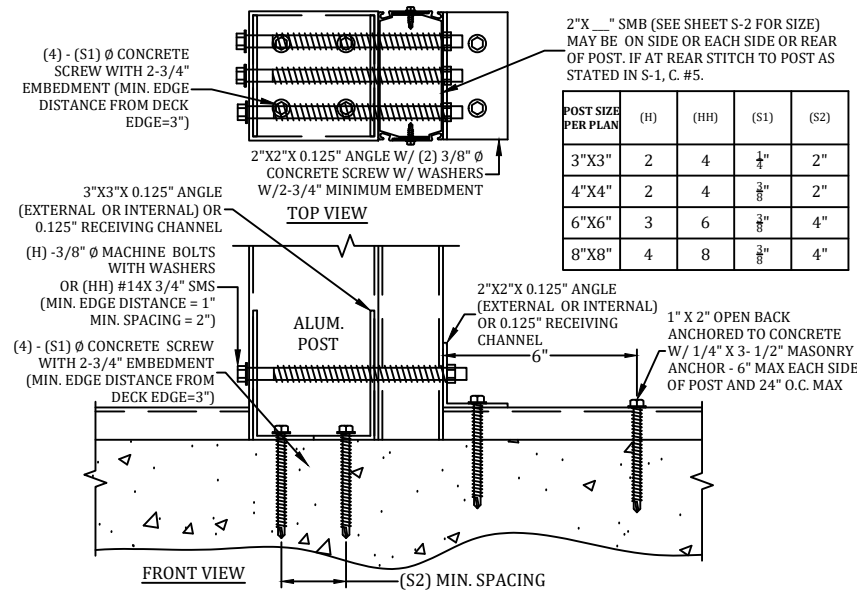

- NOTES:
- CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON TITEN HD (S1) Ø SCREW ANCHORS, OTHER SIZE OR TYPE OF ANCHORS SHALL NOT BE USED.
 - FOR PATIO COVERS AND CARPORTS: DISREGARD THE 1X2 OPEN BACK SCREEN MEMBER ON THE FOUNDATION TYP.
 - MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL POST LOCATIONS. ALL SCREW LENGTHS AT POST CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
 - MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
 - DETAIL MAY BE FLIPPED AS NEEDED
 - USE 1/4" X 3" LAG SCREWS IN LIEU OF CONCRETE SCREWS FOR WOOD HEADERS, JOISTS, AND GIRDERS
 - SEE S-1, DESIGN DATA: NOTE 10 FOR FOUNDATION INFORMATION.

ALUM. POST CONNECTION DETAIL
SCALE: N.T.S.

K

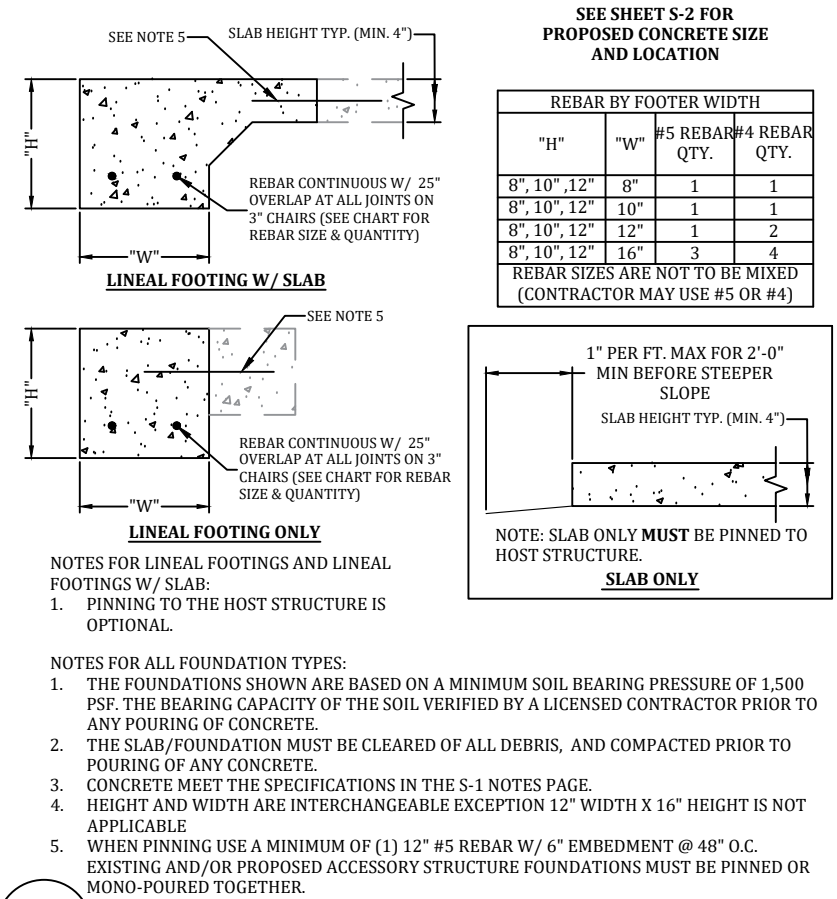


FOUNDATION DETAIL
SCALE: N.T.S.



Digitally signed by
Ian J Foster


Date: 2026.03.16
16:59:49 -04'00'

PROFESSIONAL ENGINEER SEAL									
S-5	DETAILS		JOB NUMBER: 26_0121_685_TEDFORD_REPLACMC	PROJECT TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224	Florida Building Code FBC PLANS & ENGINEERING SERVICES, INC	FBC PLANS & ENGINEERING SERVICES, INC.	P.E. OF RECORD	DAVID W. SMITH	FL 53608
								THOMAS L. HANSON	FL 38654
								IAN J. FOSTER	FL 93654
								JOEL FALARDEAU	FL 70667
								ERIK STUART	FL 77605
		DRAW DATE: 01/23/2026		CONTRACTOR REPLACE MY CAGE 6301 PORTER ROAD UNIT 12 SARASOTA, FL 34240	ADDRESS: 5344 9th Street Zephyrhills, FL 33542	PHONE: (813)838-0735 FAX: 1-(866)824-7894 E-MAIL: erb@fbcplans.com WEBSITE: www.fbcplans.com C.O.A.: #29054			
REVISION 1:									
REVISION 2:									
REVISION 3:									

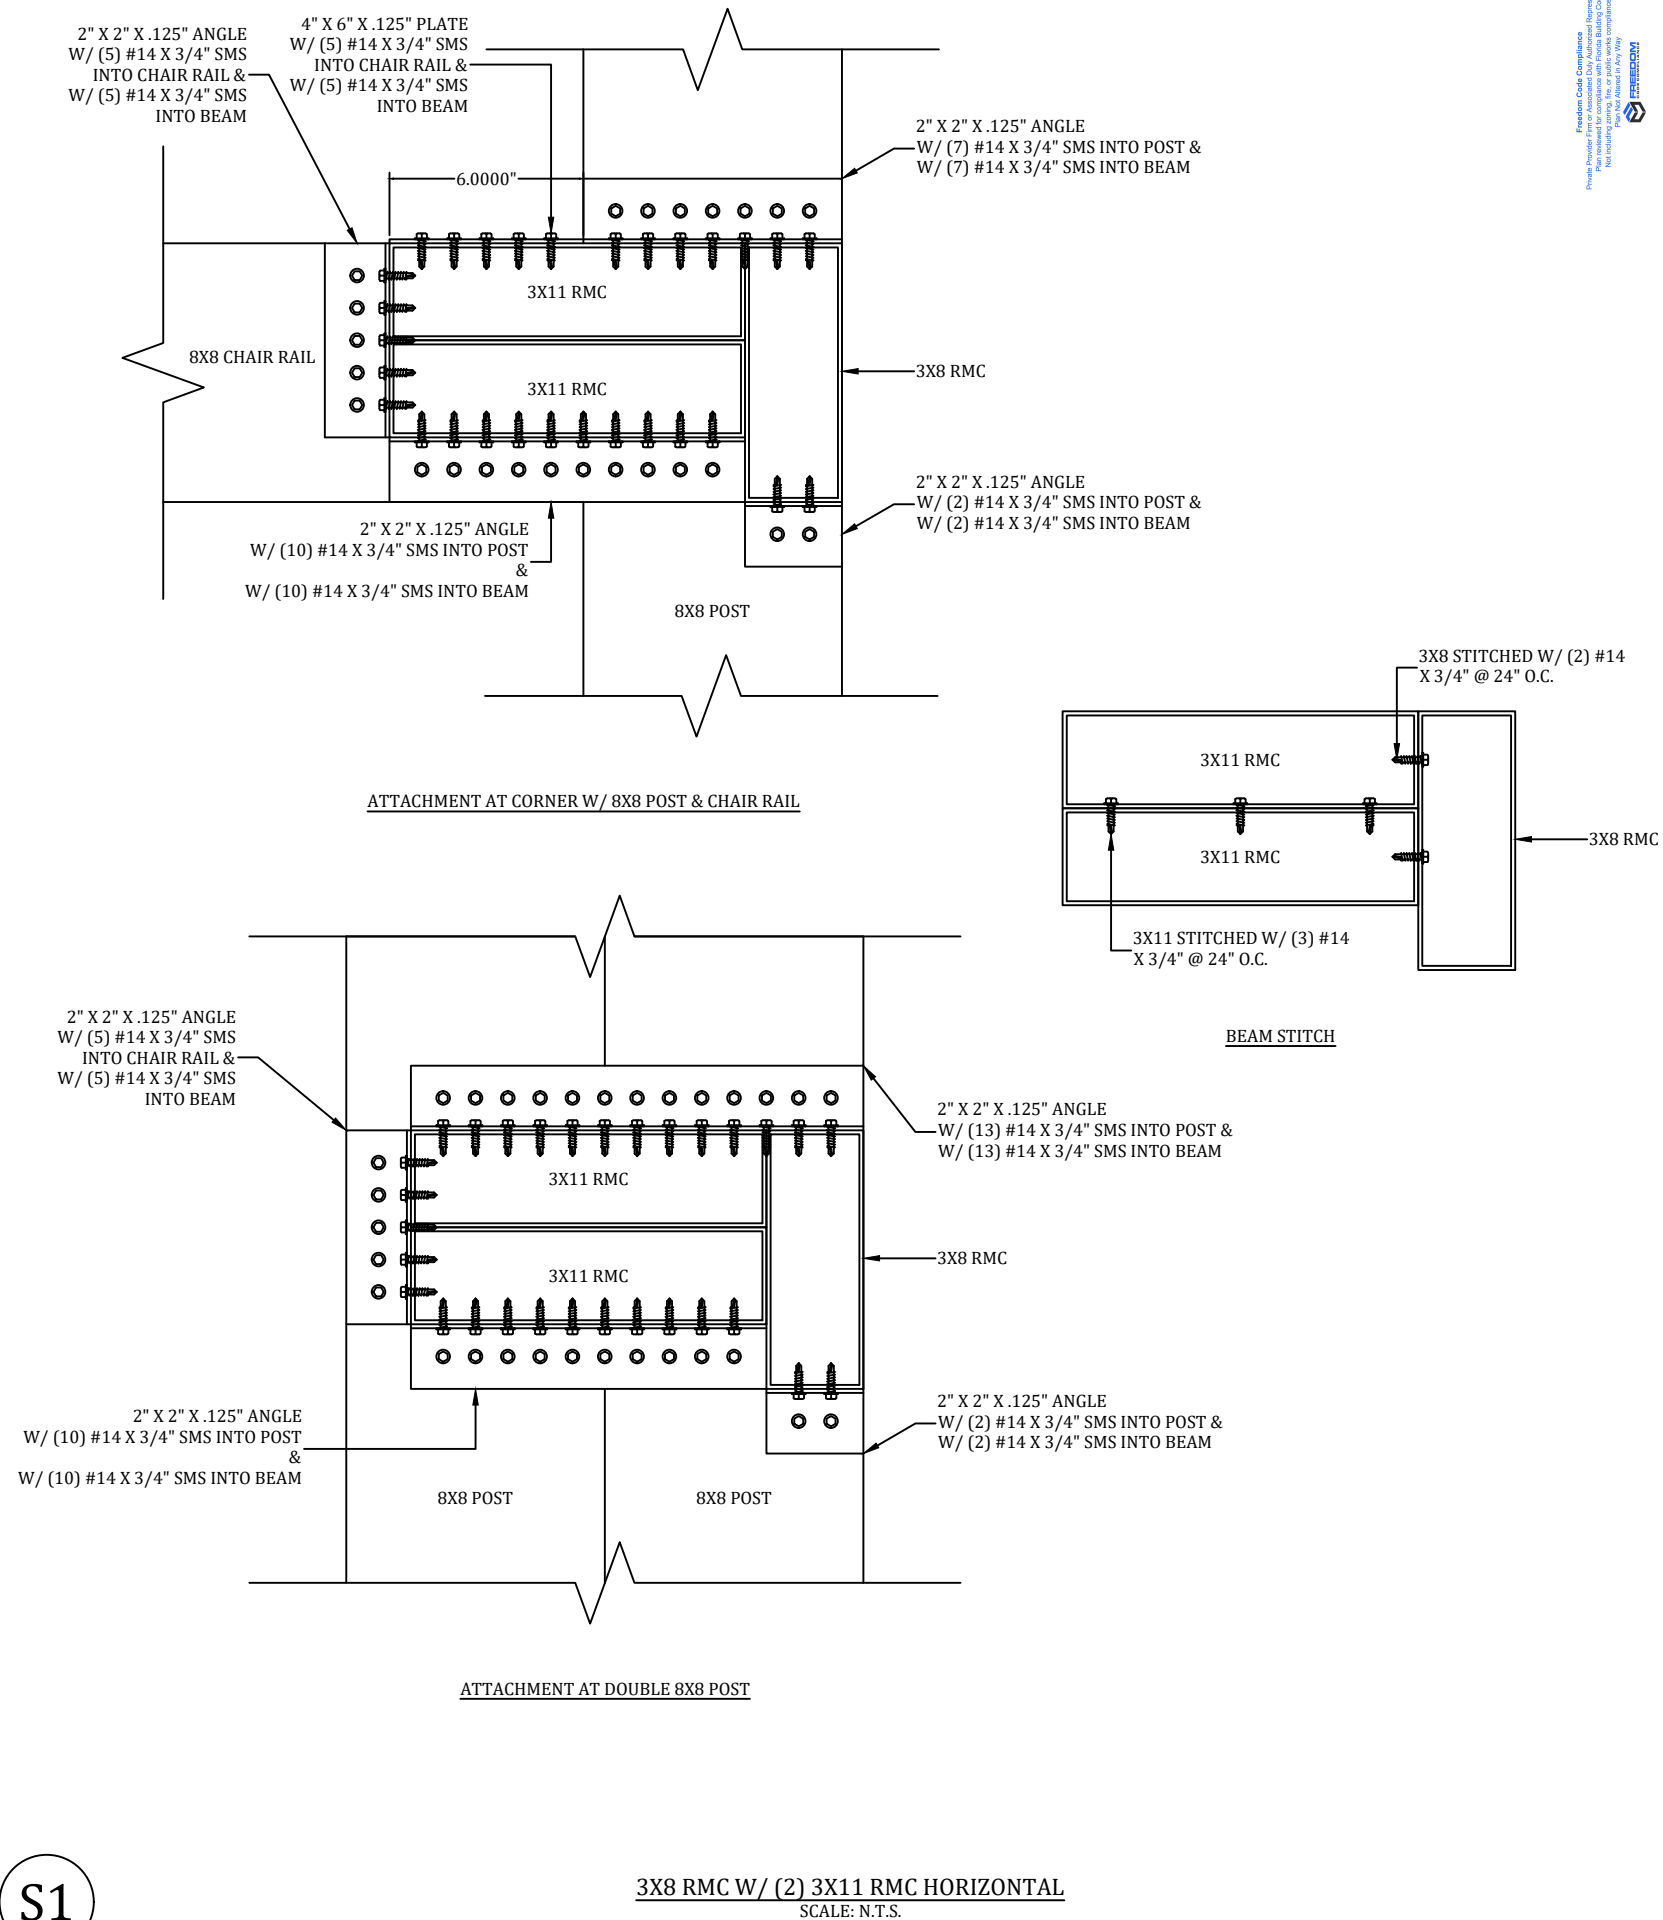

Freedom Code Compliance
Private Provider Firm or Associated Duty Authorized Representative
Plan reviewed for compliance with Florida Building Code
Not including zoning, fire, or public works compliance.
Plan Not Altered in Any Way

 **FREEDOM**
CODE COMPLIANCE




Digitally signed by
Ian J Foster

Date: 2026.03.16
16:59:55 -04'00'

S-6		DETAILS		JOB NUMBER: 26_0121_685_TEDFORD_REPLACEMC DRAW DATE: 01/23/2026 REVISION 1: REVISION 2: REVISION 3:		PROJECT TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224 CONTRACTOR REPLACE MY CAGE 6301 PORTER ROAD UNIT 12 SARASOTA, FL 34240		 FLORIDA BUILDING CODE PLANS & ENGINEERING SERVICES, INC.		FBC PLANS & ENGINEERING SERVICES, INC.		ADDRESS: 5344 9th Street Zephyrhills, FL 33542 PHONE: (813)838-0735 FAX: 1-(866)824-7894 E-MAIL: erb@fbcpplans.com WEBSITE: www.fbcpplans.com C.O.A.: #29054		P.E. OF RECORD DAVID W. SMITHFL 53608 THOMAS L. HANSONFL 38654 IAN J. FOSTERFL 93654 JOEL FALARDEAUFL 70667 ERIK STUARTFL 77605	
PROFESSIONAL ENGINEER SEAL															

This item has been
digitally signed and
sealed by Ian J.
Foster. Printed
copies of this
document are
not considered
signed and
sealed and the
signature must
be verified on any
electronic copies.



REVIEWED FOR CODE
COMPLIANCE

Digitally signed by Ian J Foster
Date: 2026.03.16
16:59:30 -04'00'

PROFESSIONAL ENGINEER SEAL

P. E. OF RECORD	
DAVID W. SMITH	FL 53608
THOMAS L. HANSON	FL 38654
IAN J. FOSTER	FL 93654
JOEL FALARDEAU	FL 70667
ERIK STUART	FL 77605

FBC PLANS & ENGINEERING
SERVICES, INC.

ADDRESS: 5344 9th Street
Zephyrhills, FL 33542
PHONE: (813)838-0735
FAX: 1-(866)824-7894
E-MAIL: erb@fbcplans.com
WEBSITE: www.fbcplans.com
C.O.A.: #29054



PROJECT
TEDFORD
7064 BAYPINE LN
ENGLEWOOD, FL 34224

CONTRACTOR
REPLACE MY CAGE
6301 PORTER ROAD UNIT 12
SARASOTA, FL 34240

JOB NUMBER:
26_0121_685_TEDFORD REPLACEMENT

DRAW DATE: 01/23/2026


REVISION 1:

REVISION 2:

REVISION 3:

DRAWING

S-2

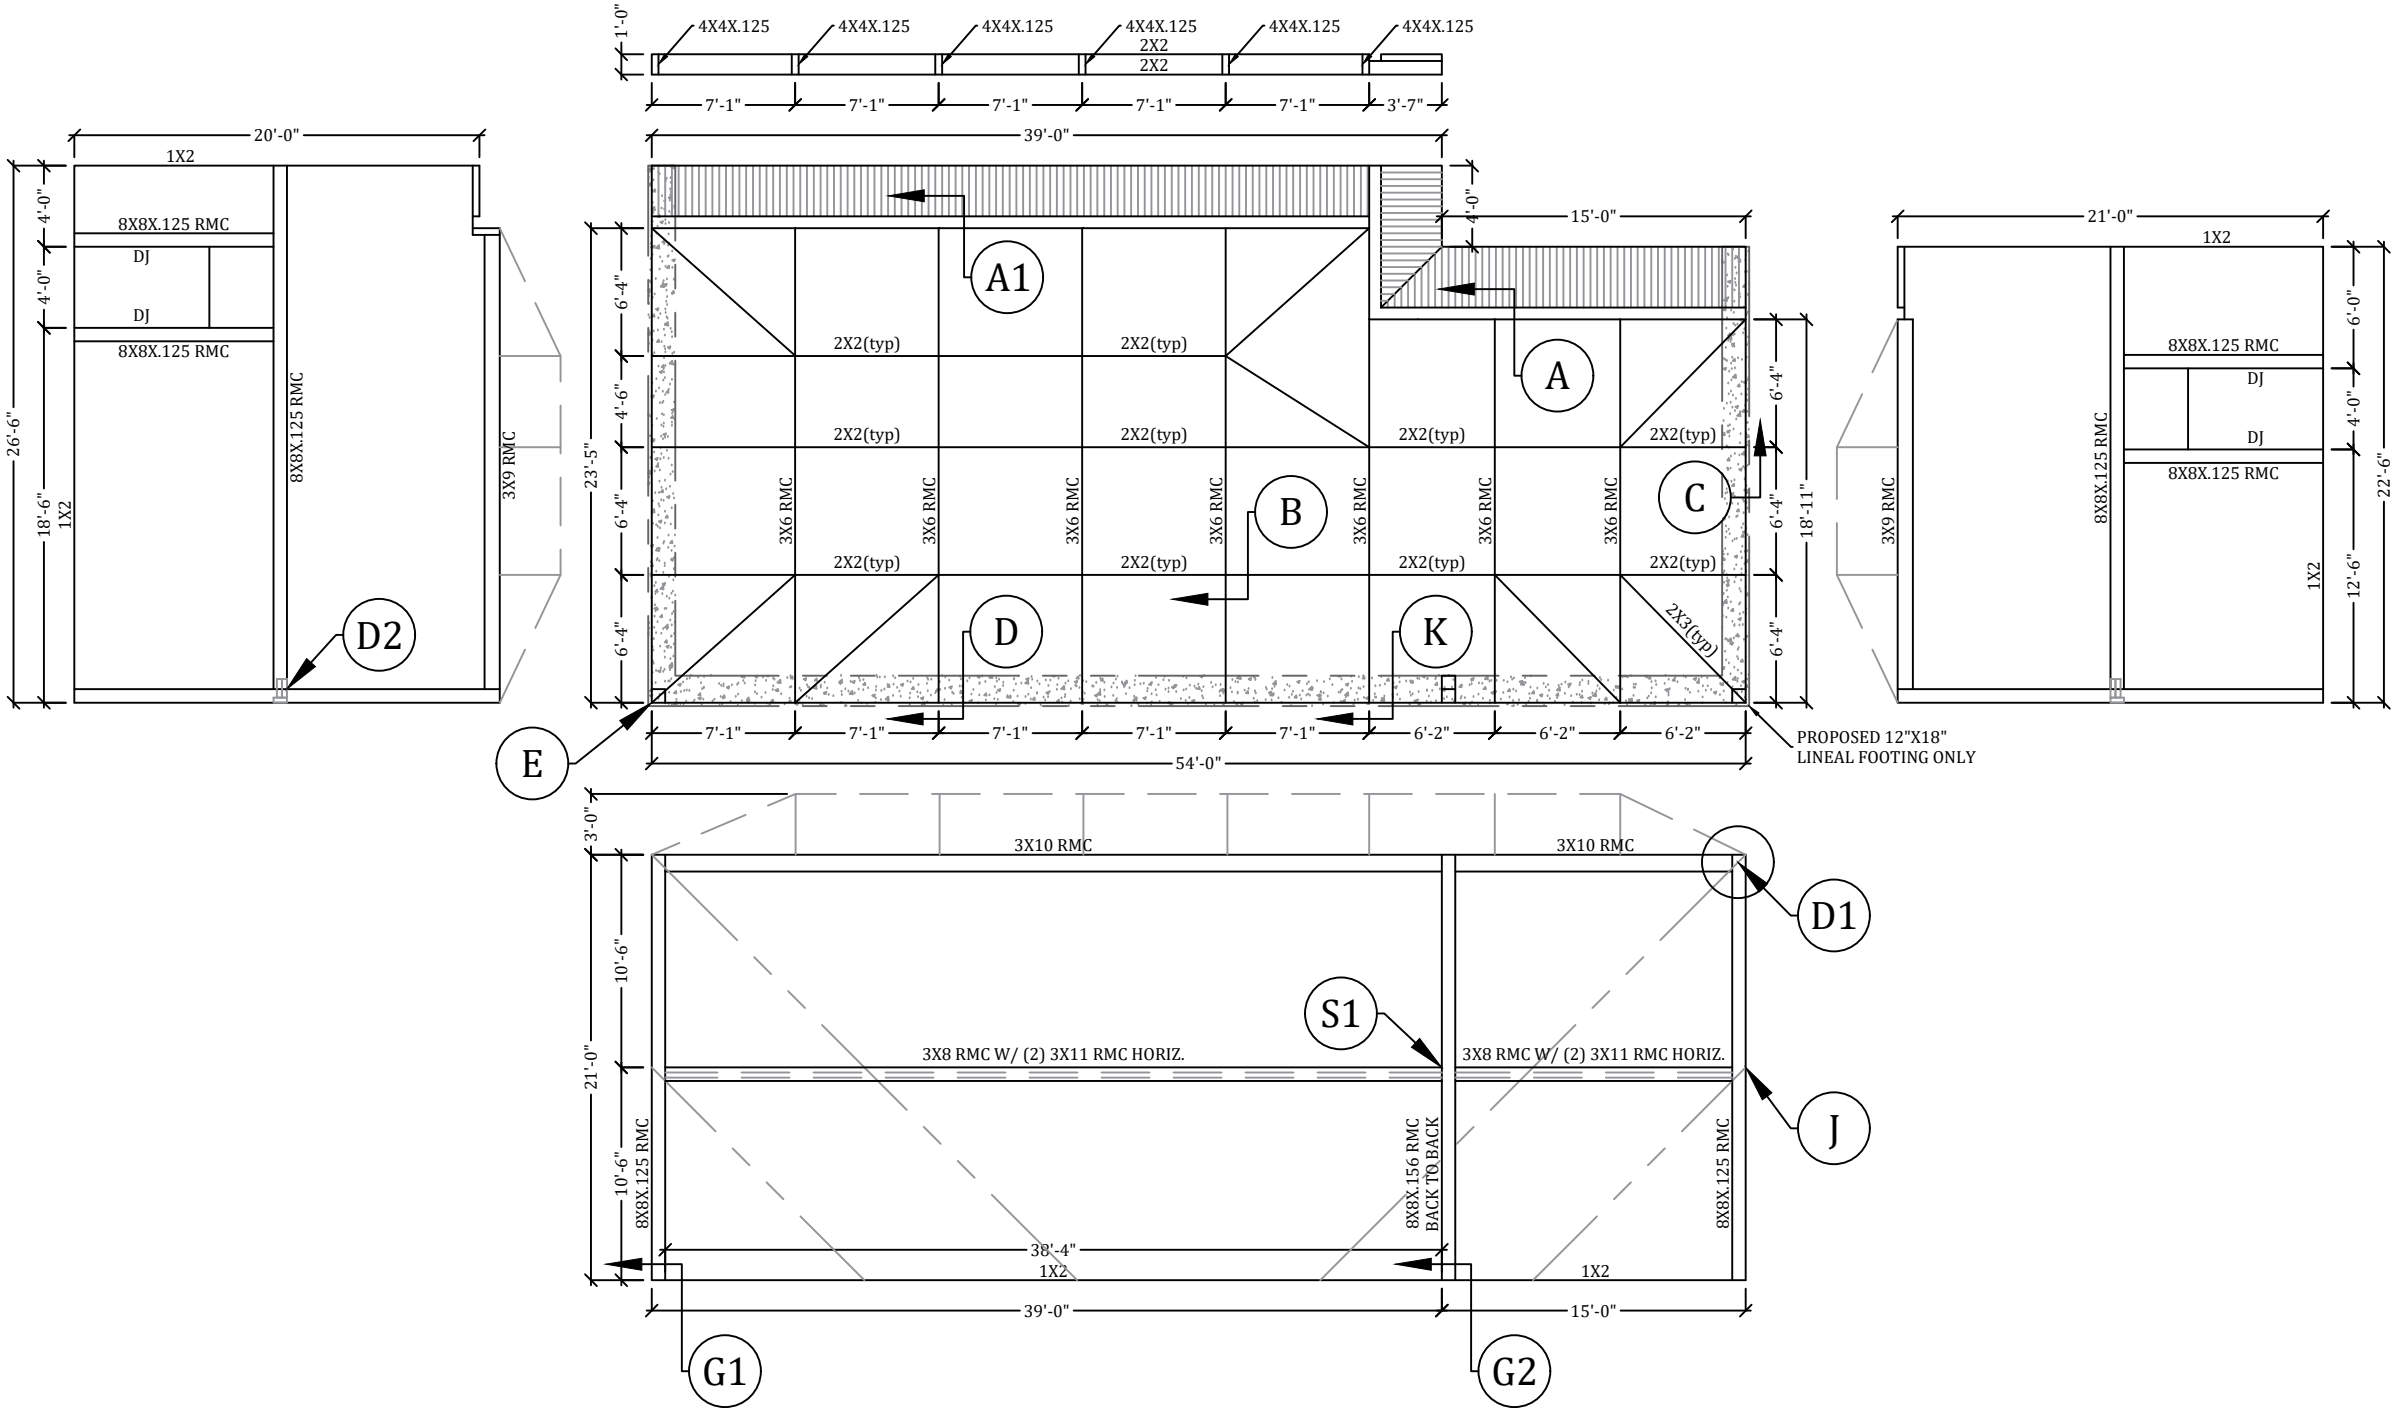

F

DOOR LOCATION MAY BE DETERMINED IN THE FIELD BY THE CONTRACTOR.



SCALE: N.T.S



SCALE: N.T.S



SCALE: N.T.S



SCALE: N.T.S.




SCALE: N.T.S



SCALE: N.T.S


16:59:37 -04'00'



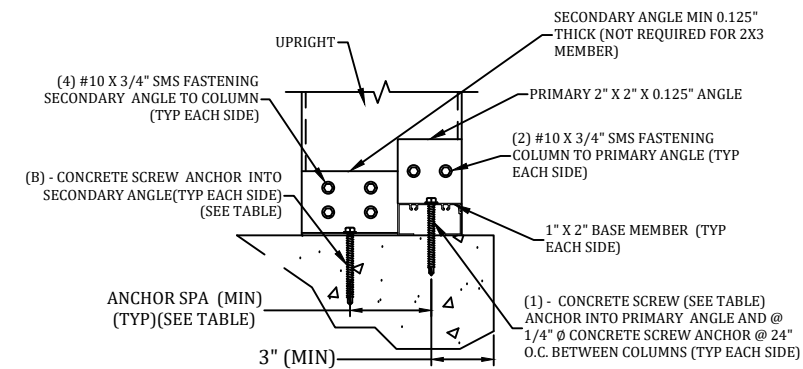


- NOTES:
1. NUMBER OF ANCHORS "B" IS EACH SIDE INTO THE SECONDARY ANGLE AND DOES NOT INCLUDE THE ANCHOR INTO THE 1X2.
 2. MINIMUM EMBEDMENT OF ANCHORS INTO CONCRETE FOOTING SHALL BE 2-3/4" AT ALL UPRIGHT LOCATIONS. ALL SCREW LENGTHS AT UPRIGHT CONNECTIONS SHALL BE OF SUFFICIENT LENGTH FOR REQUIRED EMBEDMENT INTO CONCRETE FOOTING WHEN A PAVER DECK IS PRESENT.
 3. CONCRETE SCREW ANCHOR DESIGNS ARE BASED ON THOSE LISTED ON S-1, D. FASTENERS, OTHER BRAND & TYPE SHALL BE APPROVED BY ENGINEER.
 4. 2X3W/1X2 CORNER POST SHALL REQUIRE SAME BASE CONNECTIONS AS 2X4 SHOWN IN TABLE.
 5. IF FOR AN IN-FILL, TOP OF COLUMN CONNECTION SIMILAR IF CONCRETE LINTEL.
 6. IF WOOD LINTEL/DECK, DOUBLE LEDGE REQUIRED (MIN. 3 5/8") MAY SUBSTITUTE LAG SCREW FOR LDT FOR BOTH PRIMARY & SECONDARY ANGLES.
 7. 2X2X.045 DOOR JAMB MEMBER SHALL CONNECT SIMILAR TO 2X3 MEMBER.
 8. SEE S-1, DESIGN DATA: NOTE 10 FOR FOUNDATION INFORMATION.


G 2" X 3" OR LARGER UPRIGHT TO CONCRETE W/WO PAVER
DETAILS
SCALE: N.T.S.

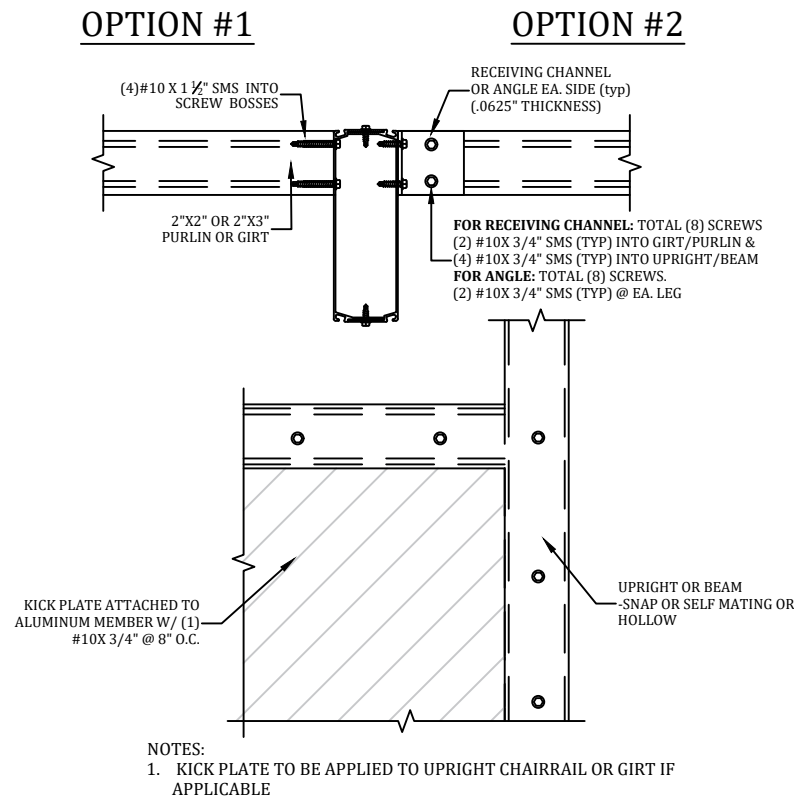


H PURLIN OR GIRT TO BEAM OR POST DETAIL
SCALE: N.T.S.

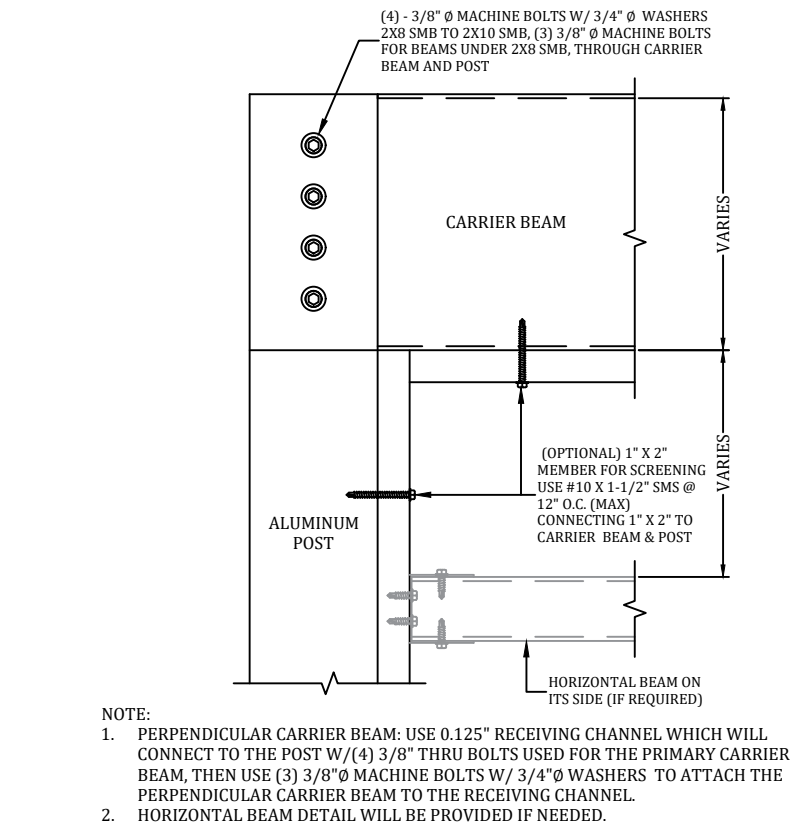

D1 BEAM TO POST DETAIL
SCALE: N.T.S.

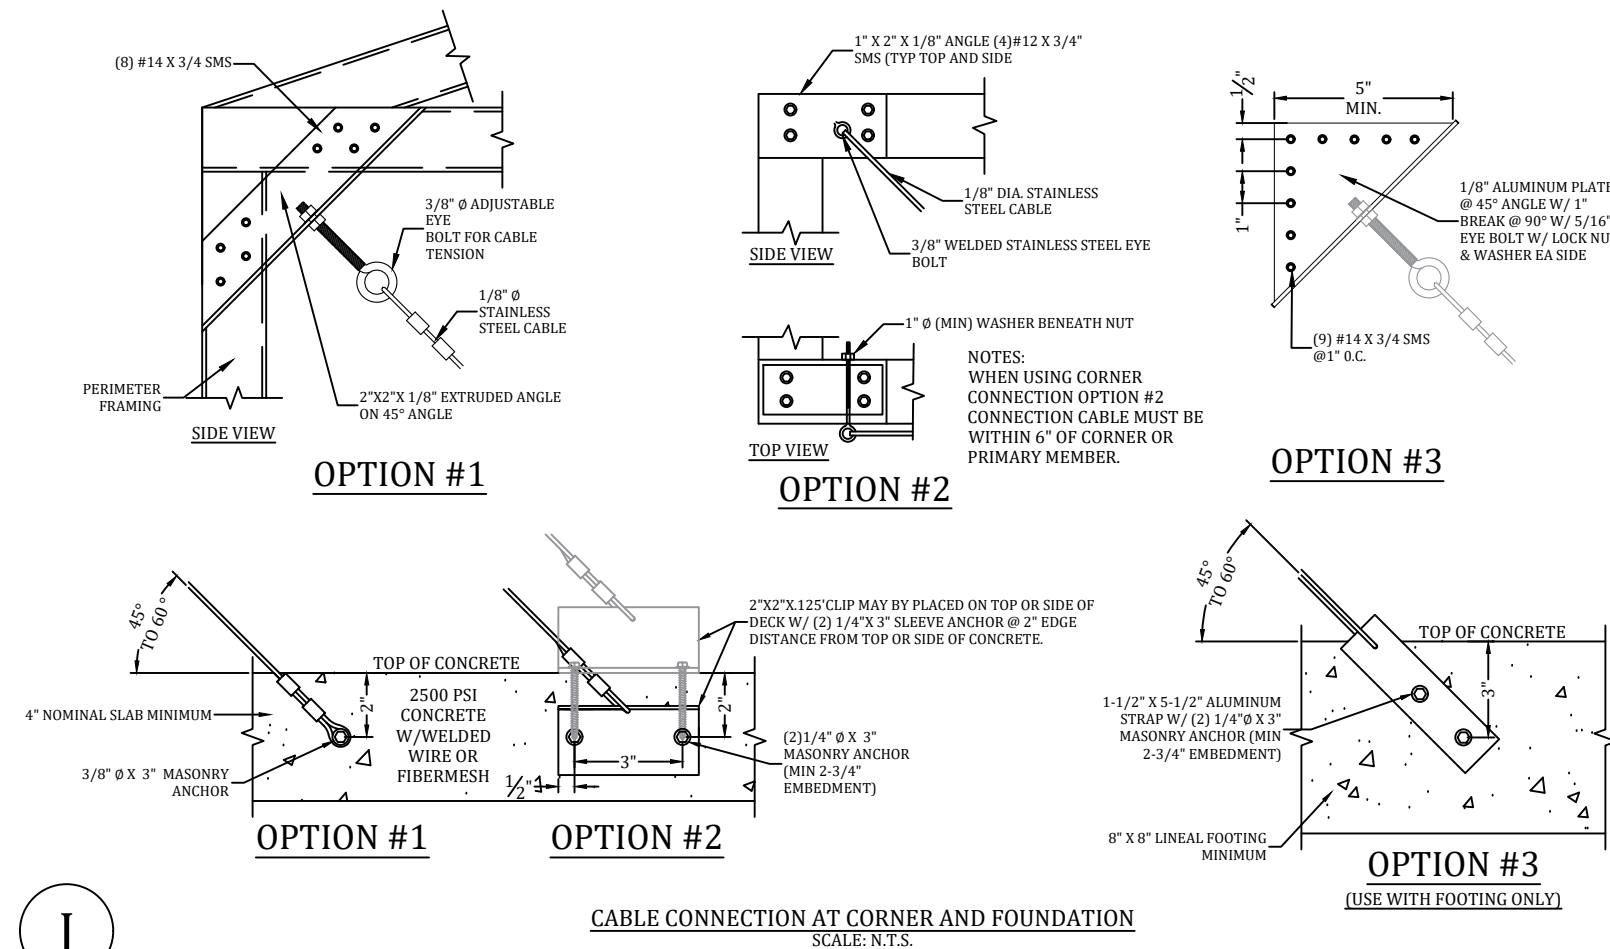

J CABLE CONNECTION AT CORNER AND FOUNDATION
SCALE: N.T.S.

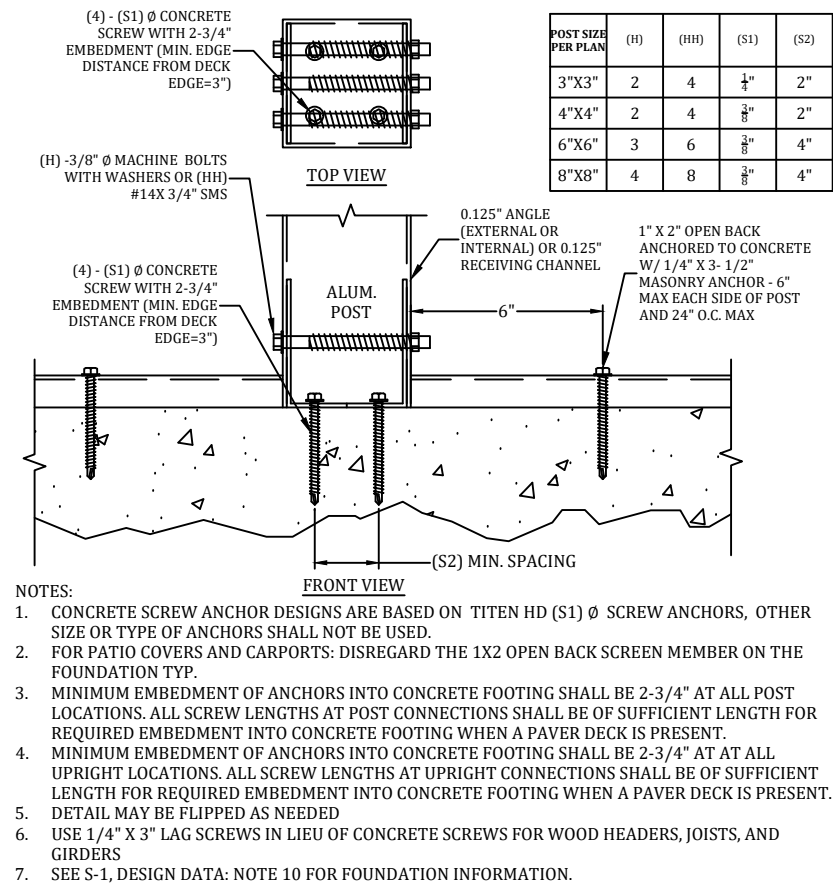

G1 ALUM. POST CONNECTION DETAIL
SCALE: N.T.S.

This item has been digitally signed and sealed by Ian J. Foster. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

IAN J. FOSTER
PROFESSIONAL ENGINEER
No. 93654
STATE OF FLORIDA

REVIEWED FOR CODE COMPLIANCE
3/1/2026 20260308603

Digitally signed by
Ian J Foster
Date: 2026.03.16
16:59:43 -04'00'

PROFESSIONAL ENGINEER SEAL	
P.E. OF RECORD	FL 53608
DAVID W. SMITH	FL 38654
THOMAS L. HANSON	FL 93654
IAN J. FOSTER	FL 70667
JOEL FALARDEAU	FL 77605
ERIK STUART	

FBC PLANS & ENGINEERING SERVICES, INC.

ADDRESS: 5344 9th Street
Zephyrhills, FL 33542
PHONE: (813)838-0735
FAX: 1-(866)824-7894
E-MAIL: erb@fbcplans.com
WEBSITE: www.fbcplans.com
C.O.A.: #29054


Florida Building Code
PLANS & ENGINEERING SERVICES, INC.

PROJECT TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224	CONTRACTOR REPLACE MY CAGE 6301 PORTER ROAD SARASOTA, FL 34240 UNIT 12
JOB NUMBER: 26_0121_685_TEDFORD REPLACEMENT	REVISION 1: REVISION 2: REVISION 3:

DETAILS


S-4

D2

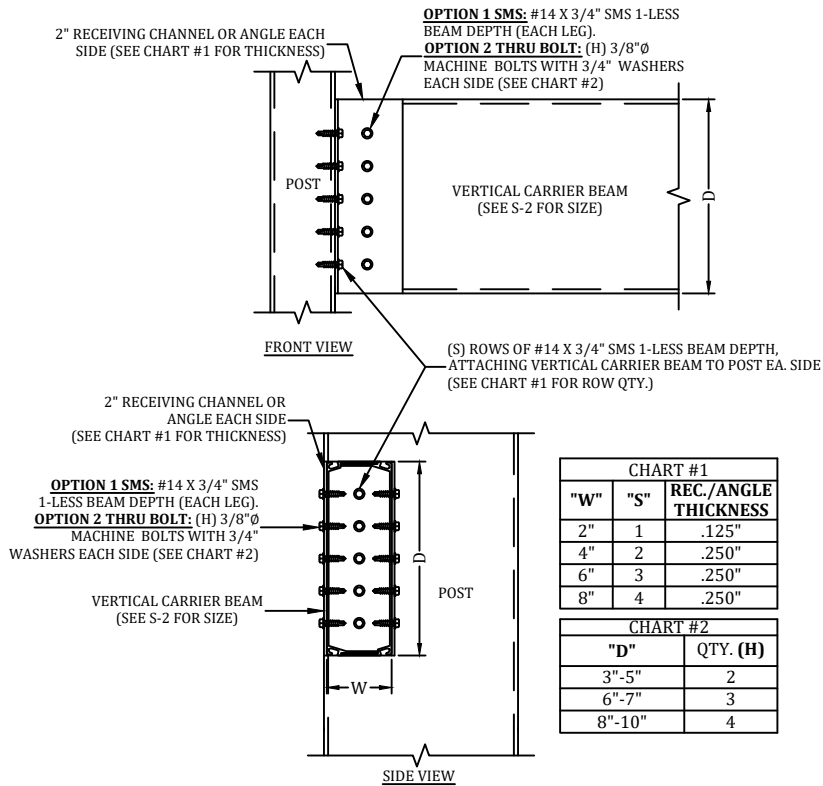


BEAM TO POST DETAIL
SCALE: N.T.S.

A1

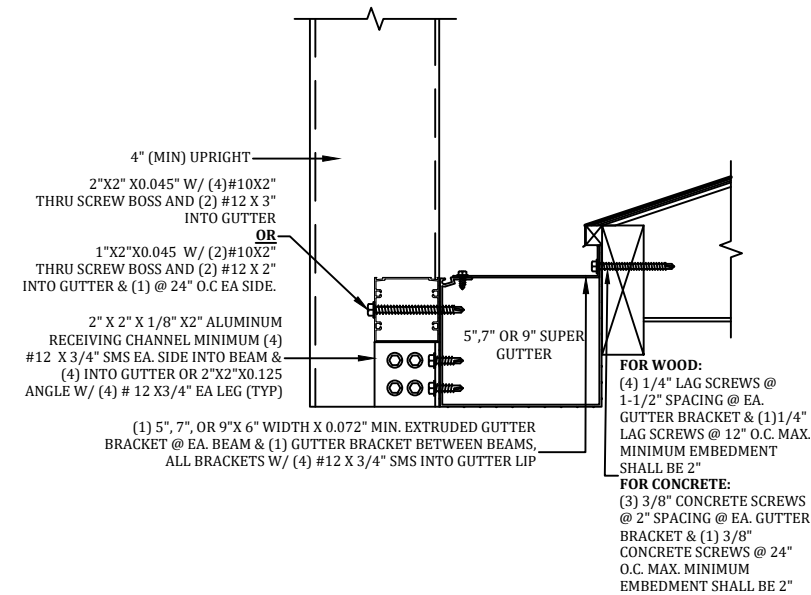


TRANSOM TO SUPER GUTTER DETAIL
SCALE: N.T.S.

G2

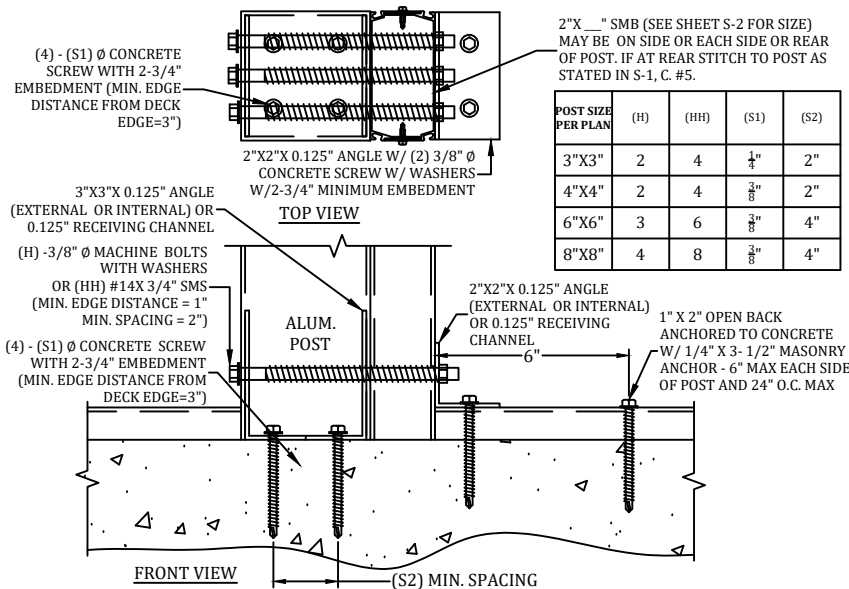


ALUM. POST CONNECTION DETAIL
SCALE: N.T.S.

K

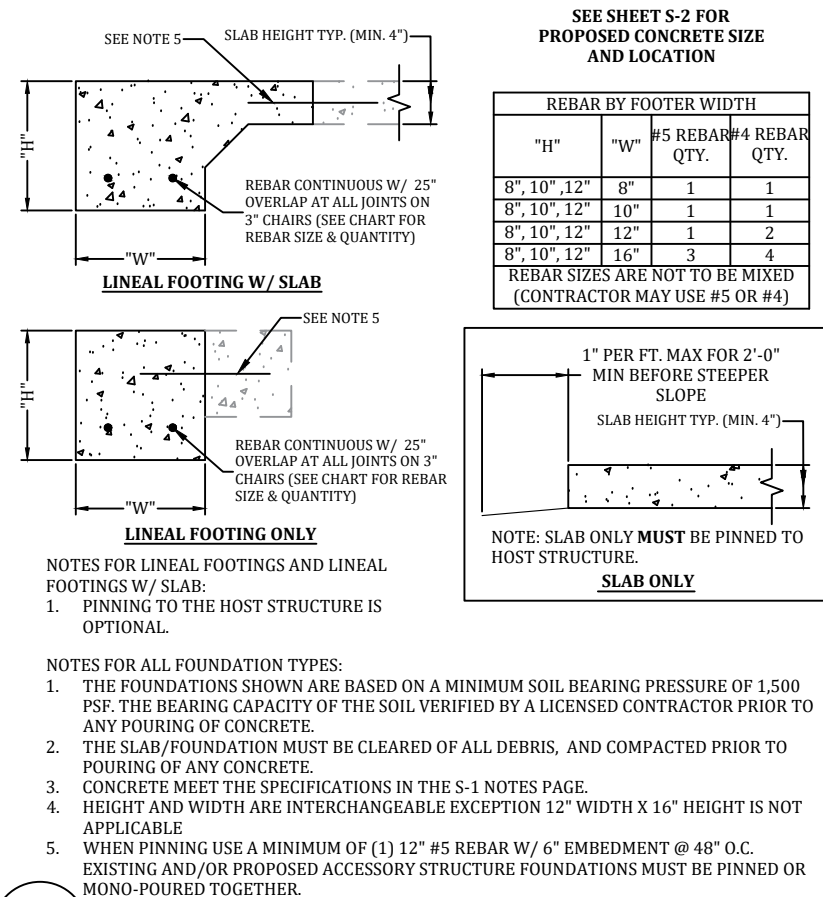

FOUNDATION DETAIL
SCALE: N.T.S.

This item has been digitally signed and sealed by Ian J. Foster. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.




Digitally signed by Ian J Foster
Date: 2026.03.16 16:59:49 -04'00'

PROFESSIONAL ENGINEER SEAL			
P.E. OF RECORD	DAVID W. SMITH	FL 53608	FL 38654
	THOMAS L. HANSON	FL 93654	FL 70667
FBC PLANS & ENGINEERING SERVICES, INC.	ADDRESS: 5344 9th Street Zephyrhills, FL 33542	PHONE: (813)838-0735	FAX: 1-(866)824-7894
	E-MAIL: erb@fbcplans.com	WEBSITE: www.fbcplans.com	C.O.A.: #29054
PROJECT	TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224		
	CONTRACTOR REPLACE MY CAGE 6301 PORTER ROAD UNIT 12 SARASOTA, FL 34240		
JOB NUMBER:	26_0121_685_TEDFORD_REPLACEMC	DRAW DATE: 01/23/2026	REVISION 1:
			REVISION 2:
DETAILS			
S-5			

S1

3X8 RMC W/ (2) 3X11 RMC HORIZONTAL
SCALE: N.T.S.

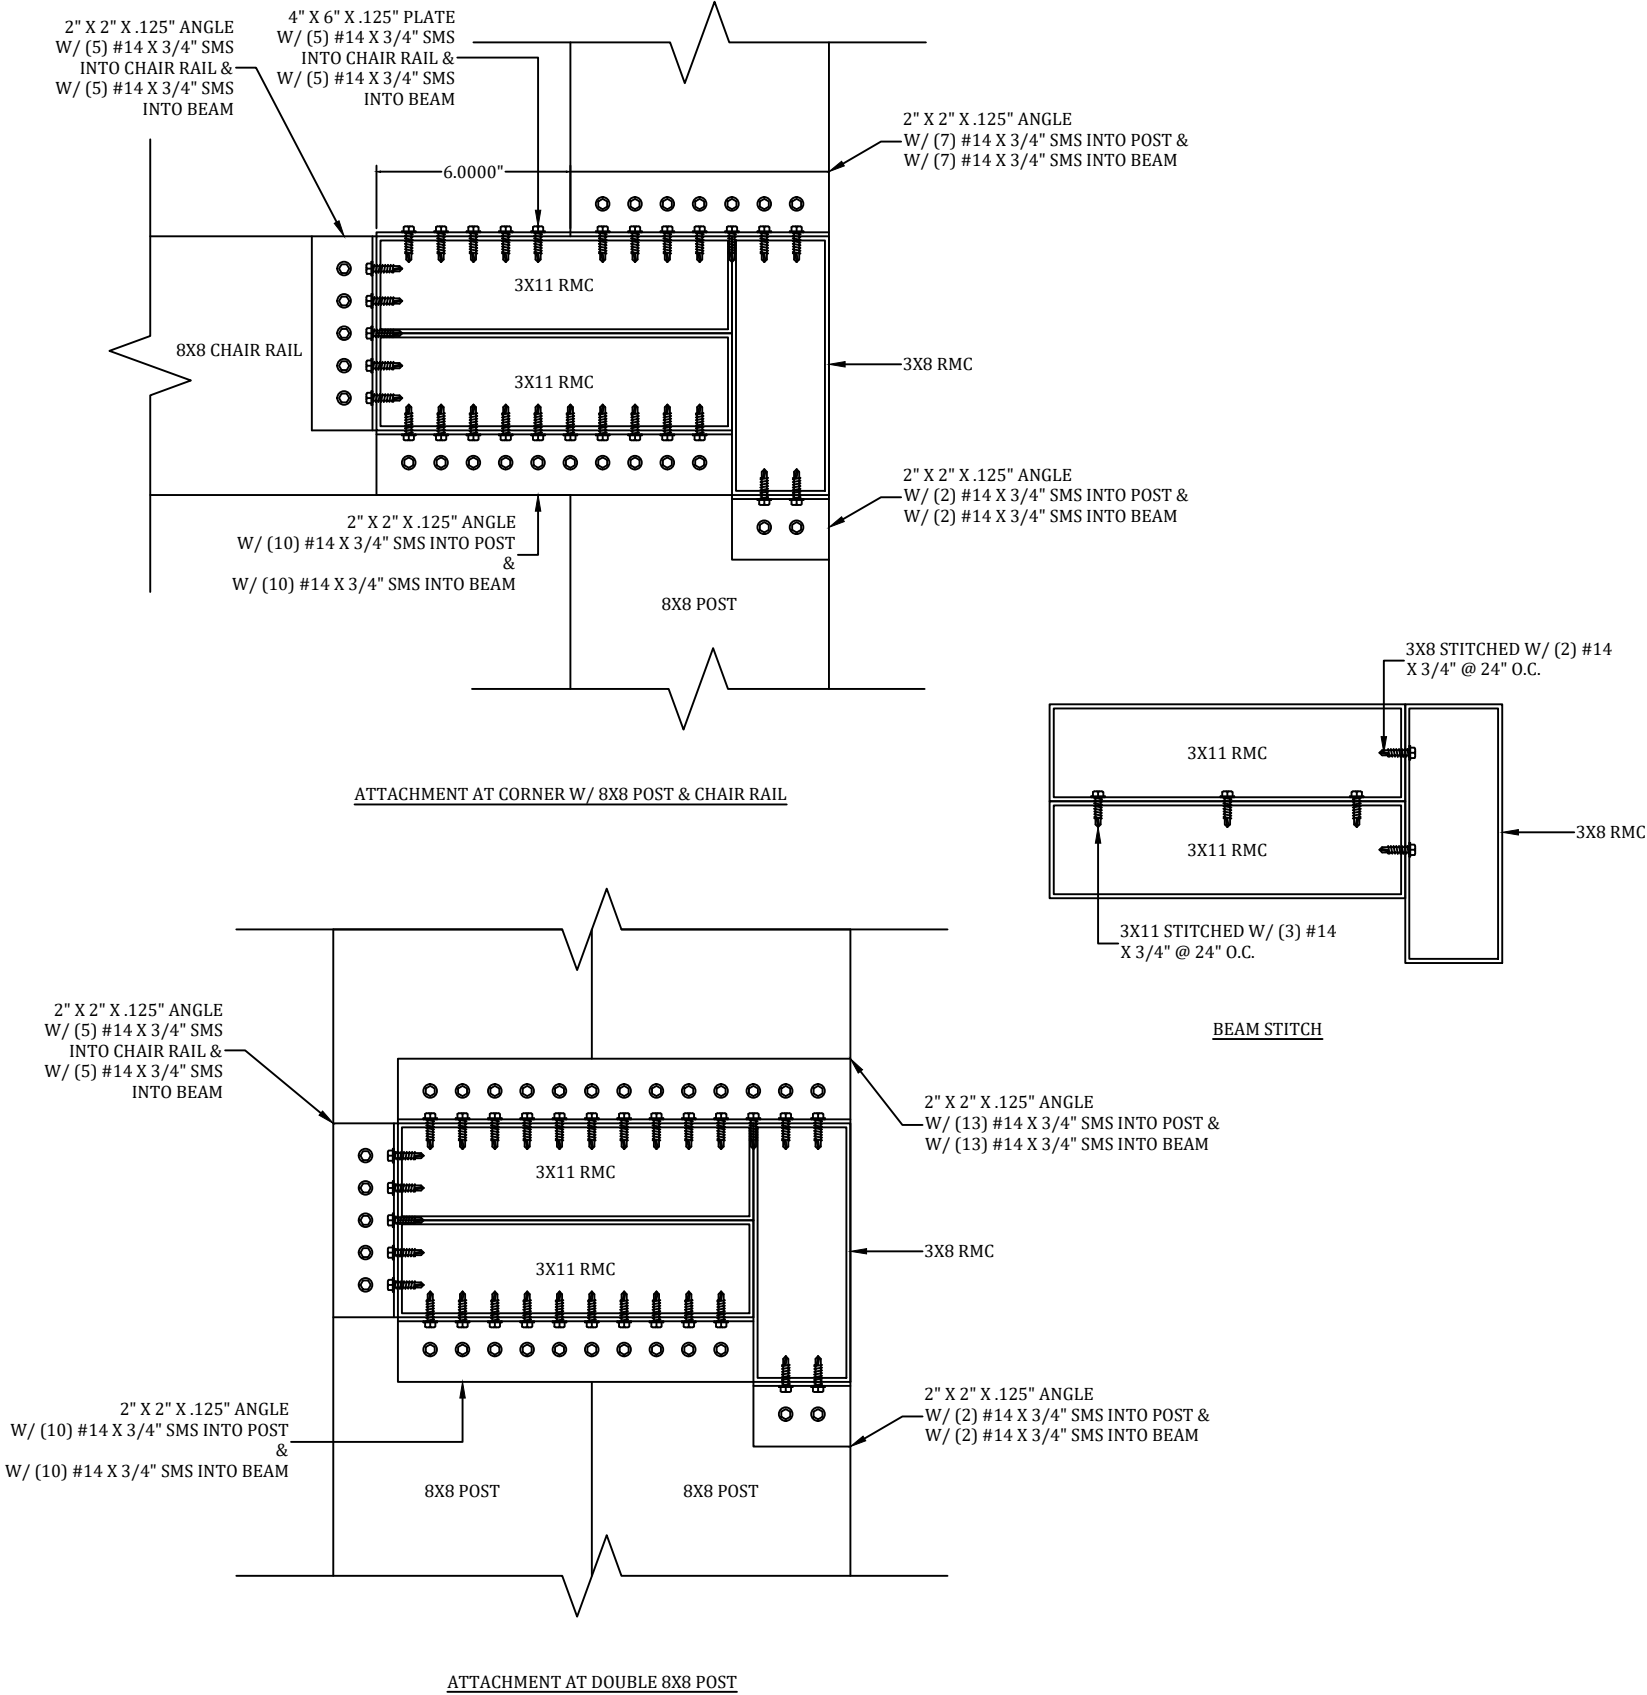

This item has been digitally signed and sealed by Ian J. Foster. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

REVIEWED FOR CODE COMPLIANCE
3/31/2026 20260308603

Digitally signed by Ian J Foster
Date: 2026.03.16 16:59:55 -04'00'

PROFESSIONAL ENGINEER SEAL

IAN J. FOSTER
LICENSE
No. 93654
STATE OF FLORIDA
PROFESSIONAL ENGINEER

PROJECT TEDFORD 7064 BAYPINE LN ENGLEWOOD, FL 34224		CONTRACTOR REPLACE MY CAGE 6301 PORTER ROAD UNIT 12 SARASOTA, FL 34240		JOB NUMBER:		P.E. OF RECORD	
				26_0121_685_TEDFORD_REPLACEMENTC		DAVID W. SMITH FL 53608	
				DRAW DATE: 01/23/2026		THOMAS L. HANSON FL 38654	
				REVISION 1:		IAN J. FOSTER FL 93654	
				REVISION 2:		JOEL FALARDEAU FL 70667	
REVISION 3:		ERIK STUART FL 77605					
DETAILS							
S-6							

There is a legal obligation by the owner and/or the builder on this property to comply with the recorded deed restrictions

Any structure or appurtenance located within a publicly dedicated easement will require approval from all utility and drainage service providers

$$C1$$

$$L = 32.73'$$

$$R = 197.00'$$

$$\Delta = 09^{\circ}31'51''$$

SURVEY NOTES

CONCRETE DRIVE CROSSING THE NORTH AND SOUTH LOT LINE INTO THE R.W.

THERE ARE FENCES NEAR THE BOUNDARY.

CALL 2 FULL BUSINESS DAYS BEFORE YOU DIG

1-800-432-4770

IT'S THE LAW IN FLORIDA

BOUNDARY SURVEY

Page dimensions:

26.5' x 54' x 22.5'

Plan approved subject to compliance with Charlotte County Zoning Regulations

Date: 20260308603

3/31/2026

APPROVED POOL

CAGE


AS PROPOSED ONLY.

JD



Know what's below. Call before you dig.

IT'S THE LAW IN FLORIDA

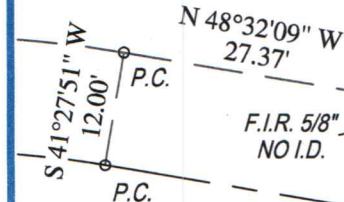

TRACT "F" 24' R/W (ASPHALT) S 41°27'40" W 107.40' S 37°00'02" E 48.48' N 52°59'58" E 24.00' P.C. S.I.R. 1/2" LB #7893

LOT 5 BLOCK 2

F.I.R. 5/8" NO I.D. 0.6'N.

PAGE 2 OF 2 PAGES

(NOT COMPLETE WITHOUT PAGE 1)

SURVEY NUMBER: 705741

GENERAL NOTES:

- LEGAL DESCRIPTION PROVIDED BY OTHERS
- THE LANDS SHOWN HEREON WERE NOT ABSTRACTED FOR EASEMENTS OR OTHER RECORDED ENCUMBRANCES NOT SHOWN ON THE PLAT.
- UNDERGROUND PORTIONS OF FOOTINGS, FOUNDATIONS OR OTHER IMPROVEMENTS WERE NOT LOCATED.
- WALL TIES ARE TO THE FACE OF THE WALL AND ARE NOT TO BE USED TO RECONSTRUCT BOUNDARY LINES.
- ONLY VISIBLE ENCROACHMENTS LOCATED.
- DIMENSIONS SHOWN ARE PLAT AND MEASURED UNLESS OTHERWISE SHOWN.
- FENCE OWNERSHIP NOT DETERMINED.
- ELEVATIONS INDICATED HEREON ARE IN FEET AND DECIMALS REFERENCED TO N.A.V.D. 1988.
- THIS SURVEY HAS BEEN COMPLETED FOR A MORTGAGE TRANSACTION. ITS SCOPE IS LIMITED TO THE DETERMINATION OF TITLE DEFICIENCIES. NO DESIGN OR CONSTRUCTION SHALL BE BASED UPON THIS SURVEY WITHOUT APPROVAL FROM TARGET SURVEYING PRIOR TO SUCH USE. TARGET SURVEYING ASSUMES NO RESPONSIBILITIES FOR ERRORS RESULTING FROM FAILURE TO ADHERE TO THIS CLAUSE.
- IN SOME INSTANCES, GRAPHIC REPRESENTATIONS HAVE BEEN EXAGGERATED TO MORE CLEARLY ILLUSTRATE RELATIONSHIPS BETWEEN PHYSICAL IMPROVEMENTS AND/OR LOT LINES. IN ALL CASES, DIMENSIONS SHALL CONTROL THE LOCATION OF THE IMPROVEMENTS OVER SCALED POSITIONS.



LB #7893

SERVING FLORIDA

6250 N. MILITARY TRAIL, SUITE 102
WEST PALM BEACH, FL 33407

PHONE (561) 640-4800
STATEWIDE PHONE (800) 226-4807
STATEWIDE FACSIMILE (800) 741-0576
WEBSITE: <http://targetsurveying.net>

* install new screen enclosure including footers

Tedford