

MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES

APPROVED

LD2604-0524 4/15/2026

REVIEWED FOR CODE COMPLIANCE

This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. The approval of these documents does not grant authority to violate any current Local, State or Federal Codes.

Zoning Review - Alexis Pope - Approved - 4/15/2026

KIRBY, ARA
7011 Portmarnock Pl, Lakewood Ranch,
Florida, 34202

GENERAL NOTES

1. DESIGN CRITERIA
FLORIDA BUILDING CODE (FBC), 8TH EDITION (2023/2024).
ASCE 7-22: MINIMUM DESIGN LOADS AND ASSOCIATED CRITERIA FOR BUILDINGS AND OTHER STRUCTURES.
ACI 318-19: BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE.
ASTM STANDARDS AS SPECIFIED HEREIN.
ALUMINUM DESIGN MANUAL 2020 EDITION (AA ADM-2020).
AA ASM 35-30: ALUMINUM STANDARDS AND DATA.
NATIONAL ELECTRICAL CODE (NEC), 2023 EDITION.
2. DESIGN LOADS
WIND SPEED (FSC CHAPTER 16): 140 MPH
ULTIMATE WIND SPEED (VULT) = 137 MPH (PER ASCE 7-22, SECTION 26.5.1).
ALLOWABLE STRESS DESIGN WIND SPEED (VASD) = 107 MPH (VASD = VULT × √0.6).
RISK CATEGORY: I (LOW HAZARD TO HUMAN LIFE).
EXPOSURE CATEGORY: B (URBAN OR SUBURBAN TERRAIN WITH OBSTRUCTIONS).
DESIGN WIND PRESSURES INTERPOLATED FROM ASCE 7-22 AND REFERENCE TABLES FOR VULT = 140 MPH, EXPOSURE CATEGORY B.
- WIND LOADS (MWFRS), BASED ON 140 MPH WIND SPEED AND EXPOSURE B:
- HORIZONTAL PRESSURE (WINDWARD): 26 PSF.
- HORIZONTAL PRESSURE (LEEWARD): 21 PSF.
- VERTICAL PRESSURE ON SCREEN SURFACE: 7 PSF.
- VERTICAL PRESSURE ON SOLID SURFACES: 27 PSF.
- LOAD REDUCTION FACTORS:
- FOR 20x20x.011" MESH SCREEN: 0.88 (MANUFACTURER DATA, ASCE 7-22 SECTION 30.5).
- FOR ALLOWABLE STRESS DESIGN PRESSURES: 0.6 (ASCE 7-22 SECTION 2.4).
3. CONTRACTOR RESPONSIBILITIES
- ALL WORK SHALL BE PERFORMED BY A LICENSED CONTRACTOR IN ACCORDANCE WITH APPLICABLE CODES, REGULATIONS, AND LOCAL ORDINANCES.
- CONTRACTOR MUST FIELD-VERIFY ALL DIMENSIONS PRIOR TO FABRICATION OR CONSTRUCTION. WRITTEN DIMENSIONS SHALL GOVERN OVER SCALED DRAWINGS.
- ANY DISCREPANCIES, ERRORS, OR OMISSIONS SHALL BE REPORTED TO THE ENGINEER IN WRITING WITHIN 10 DAYS OF PLAN RECEIPT AND PRIOR TO CONSTRUCTION.
- CONTRACTOR IS RESPONSIBLE FOR VERIFYING EXISTING SITE CONDITIONS, INCLUDING STRUCTURE AND FOUNDATION INTEGRITY, PRIOR TO COMMENCEMENT.
- CONTRACTOR SHALL PROVIDE ALL REQUIRED TEMPORARY SHORING, BRACING, AND SAFETY MEASURES DURING CONSTRUCTION.
- CONTRACTOR SHALL PROTECT EXISTING STRUCTURES, UTILITIES, AND LANDSCAPING OUTSIDE THE SCOPE OF THIS PROJECT.
- INSTALLATION PRACTICES MUST COMPLY WITH MANUFACTURER RECOMMENDATIONS, INCLUDING FLASHING AND WATERPROOFING DETAILS.
- CONTRACTOR SHALL COORDINATE SITE ACCESS FOR INSPECTIONS AND MAINTAIN CLEAN AND SAFE WORKING CONDITIONS.
- ALL UNDERGROUND UTILITIES SHALL BE LOCATED AND PROTECTED PRIOR TO EXCAVATION.
- SHOP DRAWINGS AND MATERIAL CERTIFICATIONS SHALL BE PROVIDED UPON REQUEST.
- CONTRACTOR SHALL MAINTAIN RECORDS OF INSPECTIONS AND TESTING.
- FASTENER TORQUE AND EMBEDMENT TESTING RESULTS SHALL BE PROVIDED IF REQUESTED.
4. MATERIALS
FOUNDATION
- ASSUMED SOIL BEARING CAPACITY: 2,000 PSF (VERIFY IN FIELD).
- NOTIFY ENGINEER IF UNSUITABLE SOILS ARE ENCOUNTERED.
- APPLY TERMITES TREATMENT AS REQUIRED BY FBC.
- PLACE CONCRETE OVER VAPOR BARRIER WHERE APPLICABLE.
- CONCRETE
- MINIMUM COMPRESSIVE STRENGTH: 3,000 PSI @ 28 DAYS.
- PORTLAND CEMENT: ASTM C150, TYPE I.

- AGGREGATE: 3/4" MAXIMUM, ASTM C33.
- AIR ENTRAINMENT: 4-7%, ASTM C260.
- WATER-REDUCING AGENT: ASTM C494.
- WATER: CLEAN, POTABLE.
- MINIMUM SLAB THICKNESS: 4 INCHES.
- CURE CONCRETE FOR A MINIMUM OF 7 DAYS.
- STEEL REINFORCEMENT
- REINFORCING STEEL: ASTM A615, GRADE 60.
- MINIMUM COVER FOR FOOTINGS: 2 INCHES.
- LAP SPLICES: 40 TIMES BAR DIAMETER.
- WELDED WIRE MESH PER ASTM A185.
- FIBERMESH MAY BE SUBSTITUTED IF ASTM AND ACI REQUIREMENTS ARE MET.

- ALUMINUM
- STRUCTURAL ALUMINUM ALLOY: 6005-T5 MINIMUM.
- DESIGN PER AA ADM-2020 SPECIFICATIONS.
- MINIMUM WALL THICKNESS FOR EXTRUDED MEMBERS: 0.040 INCHES.
- SELF-MATING BEAMS TO BE STITCHED WITH #12 SMS SCREWS:
 - 6" O.C. AT ENDS.
 - 18" O.C. ALONG SPANS.
- KICK PLATES (FORMED PANELS) MINIMUM THICKNESS: 0.024 INCHES.
- 18X14X0.013" MESH SCREEN IS STANDARD UNLESS OTHERWISE APPROVED.
- ROOF BRACING: 2" X 2" X 0.050" WALL THICKNESS MINIMUM.
- ALL ALUMINUM IN CONTACT WITH STEEL OR PRESSURE-TREATED LUMBER SHALL HAVE DIELECTRIC ISOLATION.
- ALUMINUM ROOF SYSTEMS SHALL BE SELECTED PER MANUFACTURER SPAN TABLES CERTIFIED BY A LICENSED FLORIDA ENGINEER.
- METAL STRUCTURES WITHIN 5 FEET OF POOLS SHALL BE BONDED PER NEC 680.26.

- FASTENERS
- ALL FASTENERS SHALL COMPLY WITH ASTM A153 FOR ZINC COATING.
- CONCRETE SCREWS: TAPCON, SIMPSON, HILTI, REDHEAD, OR APPROVED EQUAL.
- LAG BOLTS SHALL HAVE MINIMUM EMBEDMENT OF 8 TIMES BOLT DIAMETER.
- STAINLESS STEEL TYPE 304 (18-8) SHALL BE USED FOR CONNECTIONS TO PRESSURE-TREATED WOOD.
- MINIMUM FASTENER SPACING:
 - SMS: 3/4" CENTER-TO-CENTER, 1/2" EDGE DISTANCE.
 - 1X2 MEMBERS TO MASONRY: 1/4" X 2-3/4" TAPCONS @ 18" O.C.
 - 1X2 MEMBERS TO WOOD: #14 X 2-3/4" WOOD SCREWS @ 18" O.C.
 - 1X2 MEMBERS TO ALUMINUM: #10 X 1-1/2" SMS OR TEK SCREWS @ 18" O.C.
- FOR "OPEN VIEW" OR "PICTURE WINDOW" ASSEMBLIES, REDUCE FASTENER SPACING TO 12" O.C.

5. ELECTRICAL
- METAL STRUCTURES WITHIN 5 FEET OF SWIMMING POOLS MUST BE BONDED IN ACCORDANCE WITH NEC 680.26.
- PROVIDE EQUIPOTENTIAL BONDING FOR ALL CONDUCTIVE ELEMENTS WITHIN POOL AREA.
- ALL ELECTRICAL WORK SHALL COMPLY WITH NEC 2023 EDITION AND LOCAL AMENDMENTS.

6. GENERAL REQUIREMENTS
- DIMENSIONS ARE NOMINAL UNLESS OTHERWISE NOTED.
- DIMENSIONAL TOLERANCES: ±1/8" UNLESS SPECIFIED.
- NOTES APPLY TO THE ENTIRE DRAWING SET UNLESS OTHERWISE INDICATED.
- REPORT ANY CONFLICTS IN DRAWINGS TO THE ENGINEER IMMEDIATELY.
- PROVIDE SHOP DRAWINGS AND MATERIAL CERTIFICATIONS IF REQUESTED.
- ENSURE SITE ACCESS FOR REQUIRED INSPECTIONS.
- FINAL CLEANUP IS REQUIRED PRIOR TO PROJECT CLOSEOUT.

ALUMINUM EXTRUSION DIMENSIONS	
HOLLOW SECTIONS	
2 x 2	2" x 2" x 0.050"
2 x 3	2" x 3" x 0.050"
OPEN-BACK SECTIONS	
1 x 2	1" x 2" x 0.044"
SELF-MATING SECTIONS (SMB)	
2 x 4	2" x 4" x 0.044" x 0.100"
2 x 5CL	2" x 5" x 0.050" x 0.135"
2 x 6	2" x 6" x 0.050" x 0.120"
2 x 7	2" x 7" x 0.057" x 0.120"
2 x 8	2" x 8" x 0.072" x 0.224"
2 x 9	2" x 9" x 0.072" x 0.224"
2 x 10	2" x 10" x 0.092" x 0.374"
REC-TUBE - 6005-T5 MINI.	
2 x 8	2" x 8" x 0.125" x 0.125"

1	INITIAL DESIGN	JDGV	AL	BC	3/24/2026
REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE

NOTICE:
THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.





Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 3/24/2026	SHEET: 1
DRAWING TITLE: NOTES	
PROJECT NAME: KIRBY, ARA	

MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES

APPROVED
LD2604-0524 4/15/2026


REVIEWED FOR CODE COMPLIANCE
This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. The approval of these documents does not grant authority to violate any current Local, State or Federal Codes.

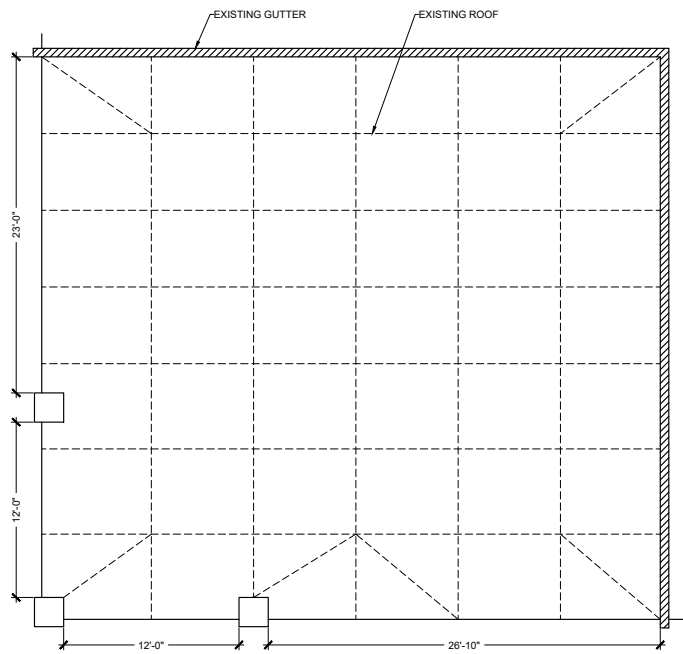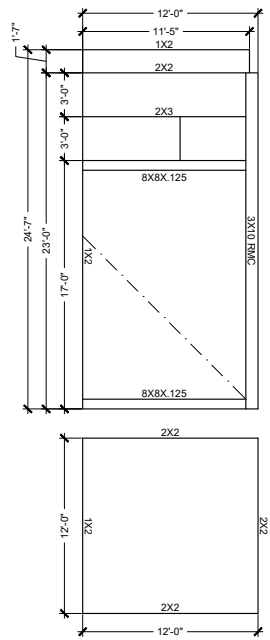

LEGEND:

— — — Indicated cable bracing. See details on sheet 3.

NOTE: Door location and framing are not structural and can be moved, as necessary, per contractor and owner approval.

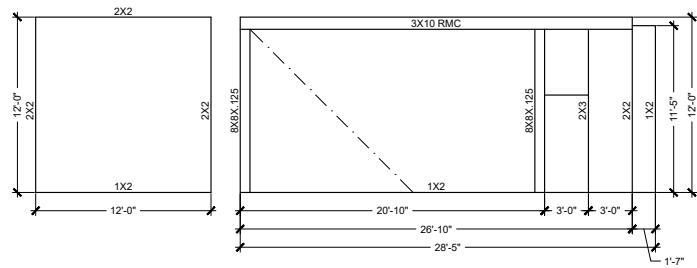

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
2	CORRECTIONS	JDGV	AL	BC	3/27/2026
1	INITIAL DESIGN	JDGV	AL	BC	3/24/2026

NOTICE:

THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.


CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.




Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 3/24/2026	SHEET: 2
DRAWING TITLE: STRUCTURAL DESIGN	
PROJECT NAME: KIRBY, ARA	


MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES
APPROVED
LD2604-0524 4/15/2026
REVIEWED FOR CODE COMPLIANCE
his set of plans must be kept on the
job site at all times. It is unlawful to
make changes without written
approval from Manatee County
Building & Development Services. The
approval of these documents does
not grant authority to violate any
current Local, State or Federal Codes.




Cable to Frame Connection
SCALE: 3" = 1'-0"

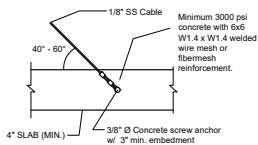


Cable to Foundation Connection
SCALE: 3" = 1'-0"

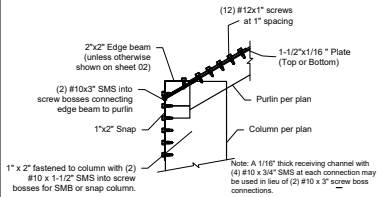


Sloped Purlin to Column Connection
SCALE: 1 1/2" = 1'-0"

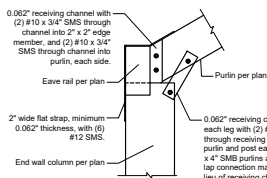

Roof Brace Connection
SCALE: 3" = 1'-0"

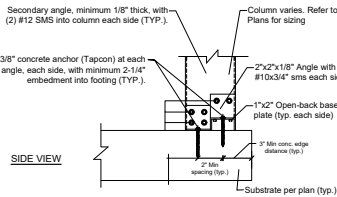


Column To FND Connection For 2x4 or Larger
SCALE: 3" = 1'-0"

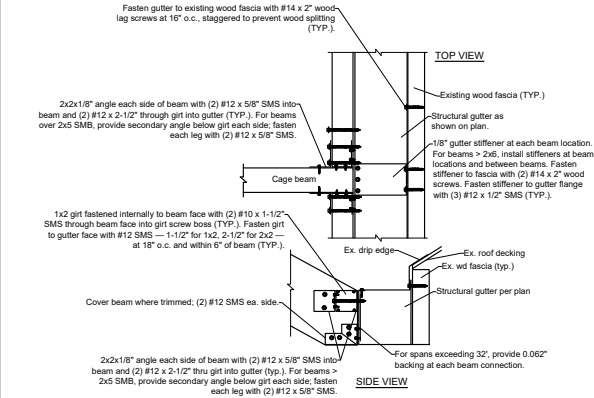


Beam to Gutter Connection
SCALE: 3" = 1'-0"

- Fascia to be fastened to rafter tail using (1) 1/4" Ø x 4" lag screw.
- 7" gutter permitted with strap length increased by 2".

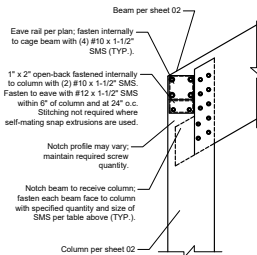


Column To Beam Connection
SCALE: 3" = 1'-0"

BEAM	QTY-SIZE SMB/SIDE
2X4	4 - #10
2X5	4 - #10
2X6	4 - #10
2X7	6 - #10
2X8	6 - #10
2X9	6 - #10
2X10	6 - #10
3X4	4 - #10
3X5	4 - #10
3X6	4 - #10
3X7	6 - #10
3X8	6 - #10
3X9	6 - #10
3X10	6 - #10
3X11	6 - #10
4X10	6 - #10

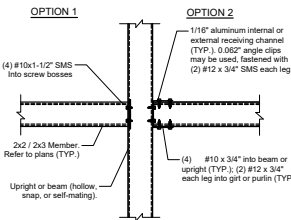

Beam/Post to Girt/Purlin Connection
SCALE: 3" = 1'-0"

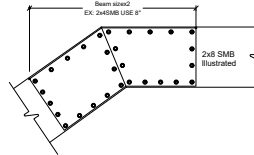

Gusset Connection
SCALE: 2" = 1'-0"

NOTE:
3/16" 6005-T5 gusset, fitted within SMB with tight tolerance to prevent slip.
Position along top and bottom beam edges. Maintain minimum fastener
spacing of 1-1/8" (shop) and 1-1/4" (field). Edge distance: min. 1/2".
Stagger fasteners as needed per adjusted fastener table. Internal purlin
screws count toward gusset connections. Pattern applies to A-frame
configurations.

BEAM SIZE	QUANTITY OF #12 SMB PER BEAM FACE/SIDE/TOTAL FOR CONNECTION.	QUANTITY OF #14 SMB PER BEAM FACE/SIDE/TOTAL FOR CONNECTION.
2X4 SMB	9/18/36	
2X5 SMB	9/18/36	
2X6 SMB	9/18/36	
2X7 SMB	10/20/40	
2X8 SMB		12/24/48
2X9 SMB		12/24/48
2X9H SMB		12/24/48
2X10 SMB		13/26/52
3X4 RMC	9/18/36	
3X5 RMC	9/18/36	
3X6 RMC	9/18/36	
3X7 RMC	10/20/40	
3X8 RMC		12/24/48
3X9 RMC		12/24/48
3X10 RMC		13/26/52
3X11 RMC		13/26/52
4X10 RMC		13/26/52

NOTICE:
THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS
OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT
DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE
DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS
WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.
CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY
ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS
SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY
CONSTRUCTION.



Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE:	3/24/2026	SHEET:	3
DRAWING TITLE:	DETAILS 1		
PROJECT NAME:	KIRBY, ARA		


MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES

APPROVED
LD2604-0524 4/15/2026

REVIEWED FOR CODE COMPLIANCE
This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. The approval of these documents does not grant authority to violate any current Local, State or Federal Codes.


Beam to Column Connection

SCALE: 3" = 1'-0"

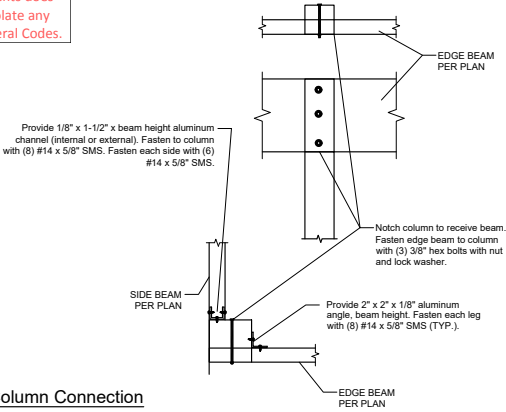


Purlin to Edge Beam Detail

SCALE: 3" = 1'-0"

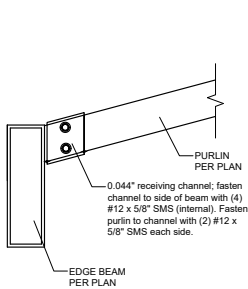


Post Base Connection

SCALE: 3" = 1'-0"

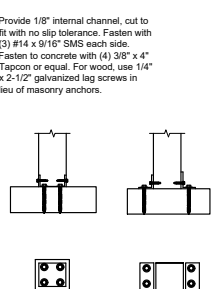


K-Brace Detail

SCALE: 2" = 1'-0"

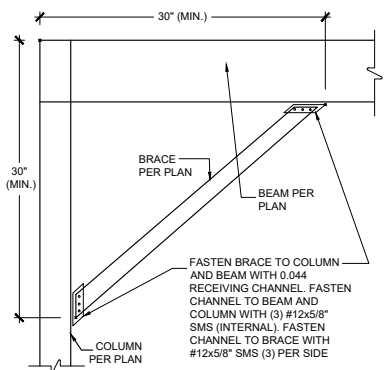

Maintain fastener edge distance of 5/8" and minimum 3/8" separation between fasteners. Install fasteners around the perimeter of the connection first, then complete the remainder in the field.

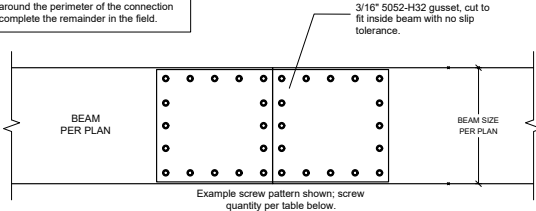


- NOTE:
- Beam splice length to be 2x beam height.
 - Locate beam splice at 1/3 points, staggered at each end of beam.
 - Provide minimum 1" camber in beam to reduce self-weight deflection.

Beam Splice Detail

SCALE: 3" = 1'-0"



FASTENER QUANTITY TABLE		
BEAM SIZE	FASTENER SIZE	QTY PER FACE/SIDE/TOTAL
2X4 SMB	#12	6 / 12 / 24
2X5 SMB	#12	6 / 12 / 24
2X6 SMB	#12	10 / 20 / 40
2X7 SMB	#12	12 / 24 / 48
2X8 SMB	#14	12 / 24 / 48
2X9 SMB	#14	18 / 36 / 72
2X10 SMB	#14	18 / 36 / 72
3X4 RMC	#12	6 / 12 / 24
3X5 RMC	#12	6 / 12 / 24
3X6 RMC	#12	10 / 20 / 40
3X7 RMC	#12	12 / 24 / 48
3X8 RMC	#14	12 / 24 / 48
3X9 RMC	#14	18 / 36 / 72
3X10 RMC	#14	18 / 36 / 72
3X11 RMC	#14	18 / 36 / 72
4X10 RMC	#14	18 / 36 / 72

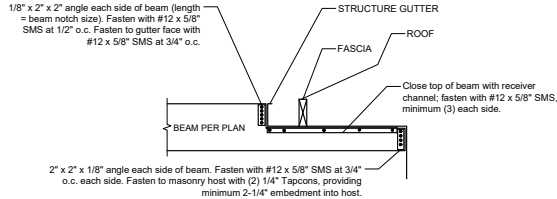

- Fascia shall be secured to rafter tail with (1) 1/4" Ø x 4" lag screw.
- A 7" gutter may be used, provided strap length is increased by 2".

Beam Under Overhang Detail

SCALE: 3" = 1'-0"

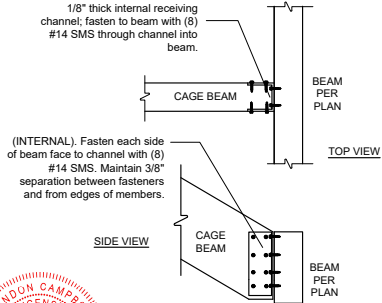

Beam to Edge Beam Detail

SCALE: 1-1/2" = 1'-0"

NOTICE:

THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.


CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.



Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE:	3/24/2026	SHEET:	4
DRAWING TITLE:	DETAILS CONT.		
PROJECT NAME:	KIRBY, ARA		

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDGV	AL	BC	3/24/2026


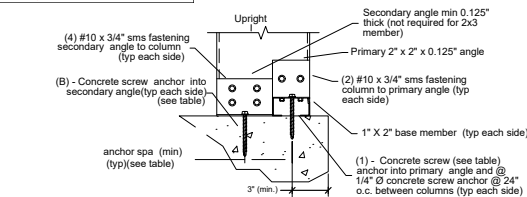


- NOTES:
1. Number of anchors "B" in each side into the secondary angle and does not include the anchor into the 1X2.
 2. Minimum embedment of anchors into concrete footing shall be 3"4" at all upright locations, all screw lengths at upright connections shall be of sufficient length for required embedment into concrete footing when a paver deck is present.
 3. Concrete screw, anchor brands are based on those listed on 1, D, fasteners, other brand & type shall be approved by engineer.
 4. 2X3 w/ 1X2 corner post shall require same base connections as 2x4 shown in table.
 5. If it is an in-fill, top of column connection similar if concrete lintel.
 6. If wood lintel/deck, double ledger required (min. 3 3/8").
 7. 2X2x0.45 Door jamb member shall connect similar to 2x3 member.

COLUMN SIZE	1 1/4" AND 3/8" Ø CONCRETE SCREW ANCHOR	
	"B"	MINIMUM SPACING
2X3 - 1/4"	0	0"
2X4 - 1/4"	1	3"
2X5 - 1/4"	1	3"
2X6 - 3/8"	1	4"
2X7 - 3/8"	1	5"
2X8 - 3/8"	2	3"
2X9 - 3/8"	2	4"
2X10 - 3/8"	2	4.5"
3X4 - 1/4"	1	3"
3X5 - 1/4"	1	3"
3X6 - 3/8"	1	4"
3X7 - 3/8"	1	5"
3X8 - 3/8"	2	3"
3X9 - 3/8"	2	4"
3X10 - 3/8"	2	4.5"
3X11 - 3/8"	2	4.5"
4X10 - 3/8"	2	4.5"

2" x 3" Or Larger Upright to Concrete w/wo Paver



SCALE: N.T.S.

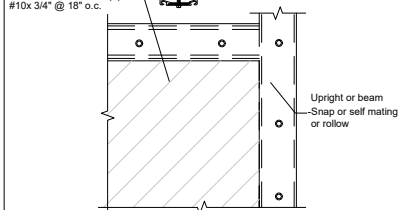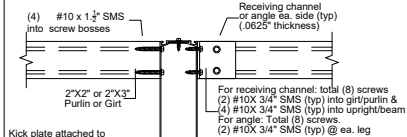

- Notes:
1. Kick plate to be applied to upright chairrail or girt if applicable

Purlin or Girt to beam or Post Detail

SCALE: N.T.S.

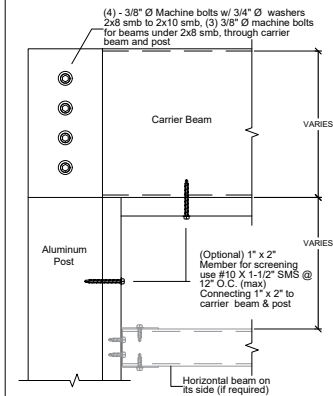

- Note:
1. Perpendicular carrier beam: use 0.125" receiving channel which will connect to the post w/ (4) 3/8" thru bolts used for the primary carrier beam, then use (3) 3/8" machine bolts w/ 3/4" washers to attach the perpendicular carrier beam to the receiving channel.
 2. Horizontal beam detail will be provided if needed.


Beam to Post Detail

SCALE: N.T.S.

(4) - (S1) Ø concrete screw with 2-3/4" embedment (min. edge distance from deck edge = 3")

Top View




POST SIZE PER PLAN	(H)	(HH)	(S1)	(S2)
3"x3"	2	4	2"	2"
4"x4"	2	4	2"	2"
6"x6"	3	6	3"	4"
8"x8"	3	6	3"	4"

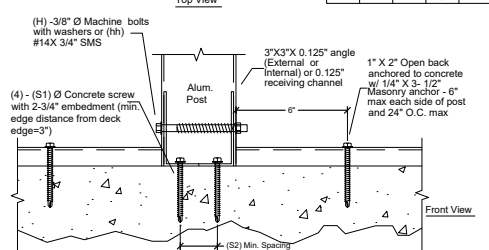

- Notes:
1. Concrete screw anchor designs are based on, Allen hd (S1) ® screw anchors, other size or type of anchors shall not be used.
2. For patio covers and carports: disregard the 1x2 open back screw member on the foundation top.
3. Minimum embedment of anchors into concrete footing shall be 2-3/4" at all positions, all screw lengths at post connections shall be of sufficient length for required embedment into concrete footing when a paver deck is present.
4. Minimum embedment of anchors into concrete footing shall be 2-3/4" at all upright locations, all screw lengths at upright connections shall be of sufficient length for required embedment into concrete footing when a paver deck is present.
5. Detail may be flipped as needed
- 5.1 Use 1/4" x 3" lag screws in lieu of concrete screws for wood headers

Alum. Post Connection Detail


SCALE: N.T.S.

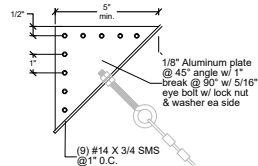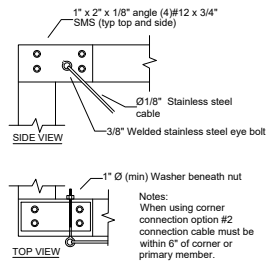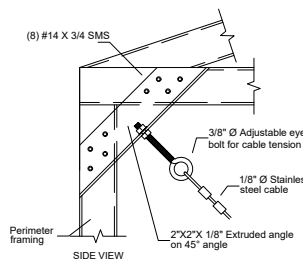

NOTICE:


THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY
ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS
SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY
CONSTRUCTION.

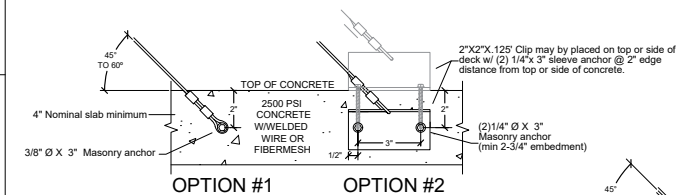

Cable Connection at Foundation

SCALE: N.T.S.

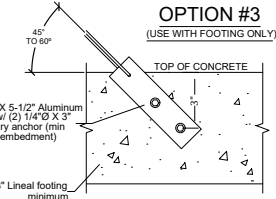


OPTION #3
(USE WITH FOOTING ONLY)



aid

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 3/24/2026	SHEET: 5
DRAWING TITLE: DETAILS CONT.	
PROJECT NAME: KIRBY, ARA	



1. Horizontal splice shall be done similar to corner splice w/ 24" I-beam insert w/ (5) #14 x1" SMS EA. section as shown above.
2. Angular splice shall also be done similar as above.
3. Beam continuation use base plate on back side of post & attach with (4) #16X 2" SMS.

THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY
ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS
SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY
CONSTRUCTION.




Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE:	3/24/2026
-------	-----------

SHEET:	6
---------------	---


DRAWING TITLE:
DETAILS CONT.

PROJECT NAME: KIRBY, ARA

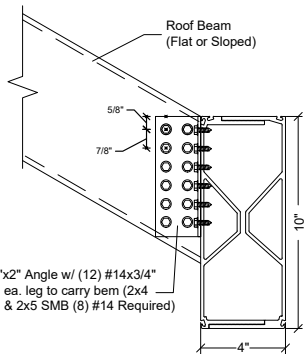


Roof Beam to Carrier Beam Connection Detail

SCALE: N.T.S.

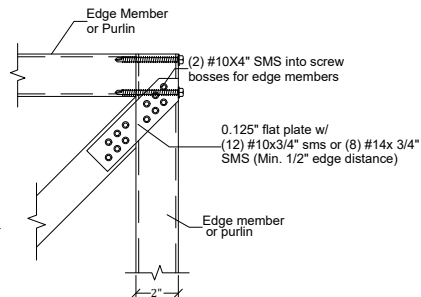

Option #1


Both ends similar

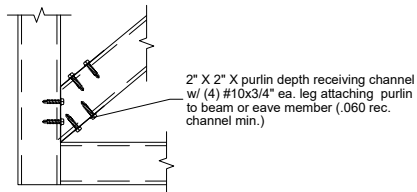

Option #2

Roof Bracing Connection Detail

SCALE: N.T.S.

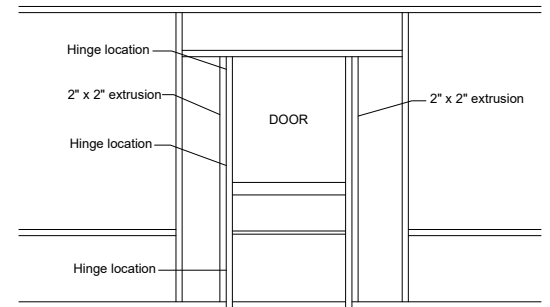


Typical Screen Door Connection Detail

SCALE: N.T.S.

Notes:

1. Hinges shall be attached to structure w/ (3) #10 x 5/8" SMS minimum.
2. Door shall be attached to enclosure w/(2) hinges minimum.
3. Hinges shall be attached to door with (3)#10 x 5/8" SMS . fasten a 1" x 2" x 0.044" to upright w/#12 x 1" SMS @ 12" O.C. and within 3" from end of the upright(if applicable).



NOTICE:

THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.



Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 3/24/2026

SHEET: 7

DRAWING TITLE: DETAILS CONT.

PROJECT NAME: KIRBY, ARA

MANATEE COUNTY BUILDING & DEVELOPMENT SERVICES APPROVED	1	INITIAL DESIGN	JDGV	AL	BC	3/24/2026
	REV	REVIEWED FOR CODE COMPLIANCE				
	4/15/2026	This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. These plans are not to be used for any other project without the approval of these documents. These plans are not to be used for any other project without the approval of these documents. These plans are not to be used for any other project without the approval of these documents.				
	BLD2604-0524	REVIEWED FOR CODE COMPLIANCE				


BOUNDARY SURVEY

SHEET 1 OF 2 (MAP OF SURVEY) - SEE SHEET TWO FOR SURVEY RELATED INFORMATION. SURVEY IS NOT COMPLETE WITHOUT BOTH SHEETS.
SUBJECT SURVEY IS TO BE PRINTED ON A LEGAL SIZE (8.5 X 14) PAPER ONLY.

NORTH
SCALE: 1" = 40'

CURVE TABLE					
CURVE	RADIUS	Δ	LENGTH	BEARINGS	CHORD
C-1	1000.00'	06°56'57"	121.28'	S 49°28'02" W	121.21' (P)
			121.02'	S 49°16'36" W	120.95' (M)
C-2	1000.00'	20°04'55"	350.50'	S 62°58'58" W	348.71' (P)
			350.77'	S 62°57'50" W	348.97' (M)

Florida Code Chapter 173
Florida Boundary Survey Act
The surveyor is required to adhere to the standards of the Florida Board of Professional Surveyors
The surveyor is required to adhere to the standards of the Florida Board of Professional Surveyors
The surveyor is required to adhere to the standards of the Florida Board of Professional Surveyors

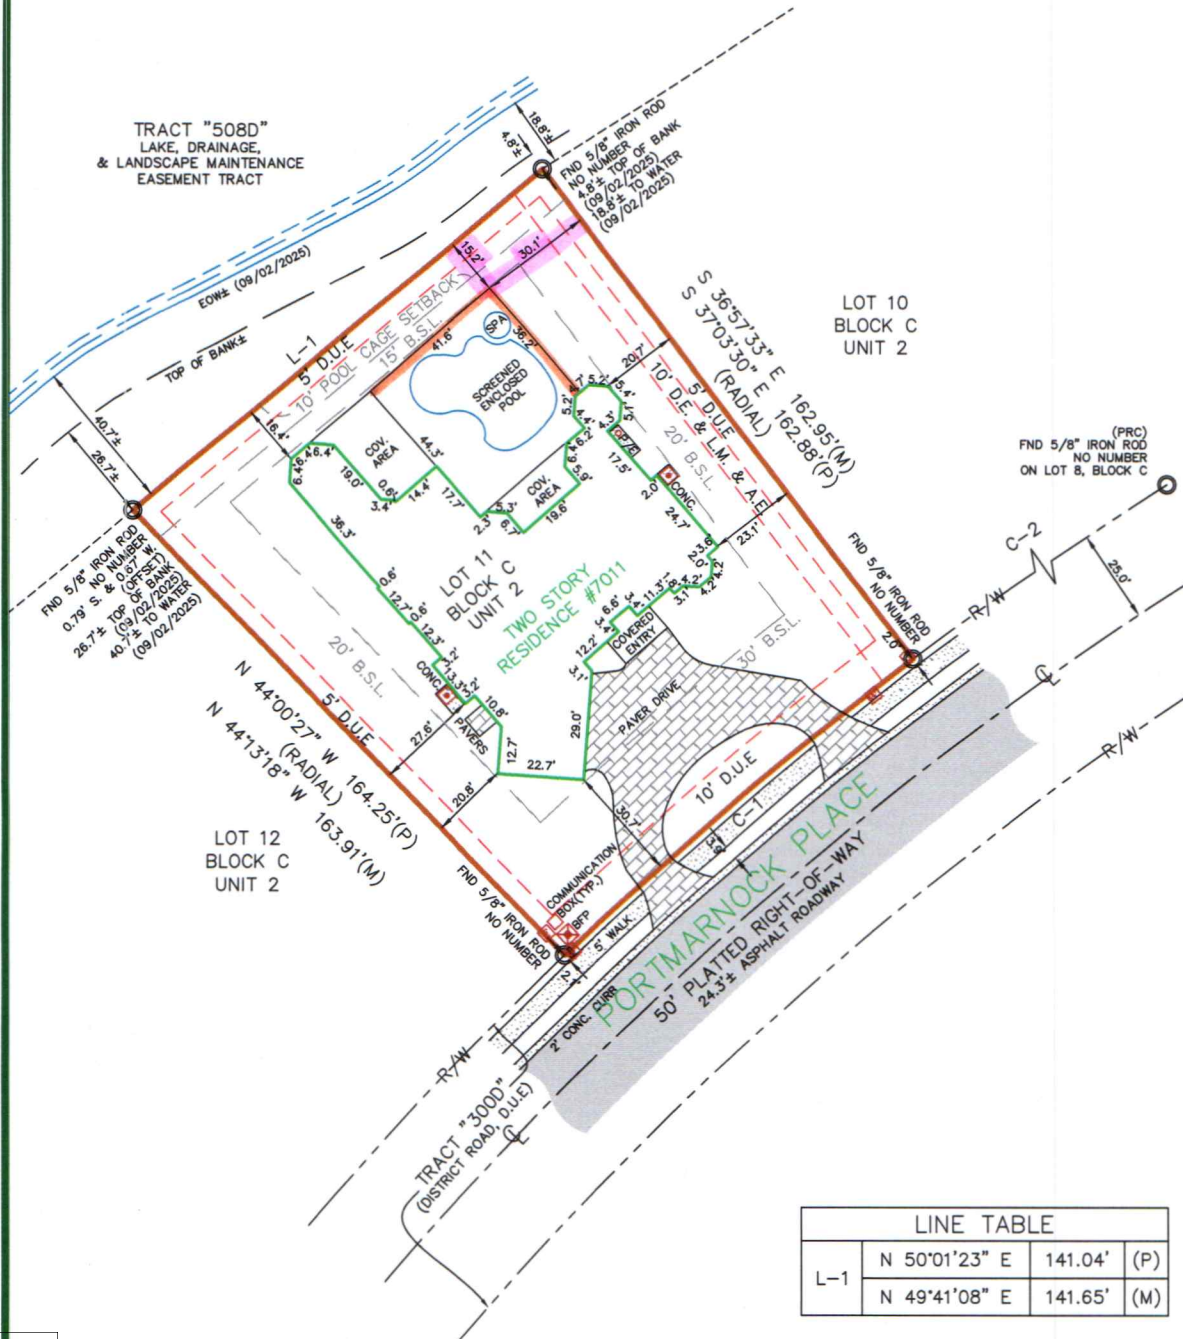

* Front + side wall conversion
from standard style to panoramic
picture windows.

Kirby

PROPERTY ADDRESS: 7011 PORTMARNOCK PLACE, LAKEWOOD RANCH, FLORIDA 34202



POINTS OF INTEREST:
PAVER DRIVES EXTENDS INTO THE FRONT
EASEMENT.

First Choice Surveying...
Your First Choice for Land Surveys

REVISIONS:
(REV.1 9/3/2025)

CLIENT NO: 25-44965-001
JOB NO: 102296
FIELD DATE: 2/2/2025
DRAWN BY: G.
DRAWN DATE: 09/03/25
CHECKED BY: LL
APPROVED BY: LL

MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES
APPROVED 4/15/2026
REVIEWED FOR CODE COMPLIANCE
This set of plans must be kept on the
job site at all times. It is unlawful to
make changes without written
approval from Manatee County
Building & Development Services. The
approval of these documents does
not grant authority to violate any
current local, state or federal laws.