

FIGHERA, JOSEPH

18027 Cropside Trl, Bradenton,
Florida, 34211

GENERAL NOTES

1. DESIGN CRITERIA
FLORIDA BUILDING CODE (FBC), 8TH EDITION (2023/2024)
FLORIDA BUILDING CODE (FBC) AND ASSOCIATED DESIGN CRITERIA FOR BUILDINGS AND OTHER STRUCTURES
ACI 318-19: BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE
ASTM STANDARDS AS SPECIFIED HEREIN
ALUMINUM DESIGN MANUAL 2020 EDITION (AA ADM-2020)
AA ASM 35-30: ALUMINUM STANDARDS AND DATA
NATIONAL ELECTRICAL CODE (NEC), 2023 EDITION

2. DESIGN LOADS
WIND SPEED (FBC CHAPTER 16): 140 MPH
ULTIMATE WIND SPEED (VULT) = 135 MPH (PER ASCE 7-22, SECTION 26.5.1)
ALLOWABLE STRESS DESIGN (ASD) WIND SPEED (VASD) = 105 MPH (VASD = VULT * 0.6)
RISK CATEGORY: 1 (URBAN OR SUBURBAN TERRAIN WITH OBSTRUCTIONS)
EXPOSURE CATEGORY: B (URBAN OR SUBURBAN TERRAIN WITH OBSTRUCTIONS)
DESIGN WIND PRESSURES INTERPOLATED FROM ASCE 7-22 AND REFERENCE TABLES FOR VULT = 140 MPH, EXPOSURE CATEGORY B

- WIND LOADS (MMFRS), BASED ON 140 MPH WIND SPEED AND EXPOSURE B:

- HORIZONTAL PRESSURE (WINDWARD): 25 PSF.
- HORIZONTAL PRESSURE (LEEWARD): 21 PSF.
- VERTICAL PRESSURE ON SCREEN SURFACE: 7 PSF.
- VERTICAL PRESSURE ON SOLID SURFACES: 26 PSF.

- LOAD REDUCTION FACTORS:

- FOR 20X20X0.11" MESH SCREEN: 0.88 (MANUFACTURER DATA, ASCE 7-22 SECTION 30.5).
- FOR ALLOWABLE STRESS DESIGN PRESSURES: 0.6 (ASCE 7-22 SECTION 2.4).

3. CONTRACTOR RESPONSIBILITIES

- CONTRACTOR SHALL BE FIELD-VERIFIED BY A LICENSED CONTRACTOR IN ACCORDANCE WITH APPLICABLE CODES, REGULATIONS, AND LOCAL ORDINANCES.
 - CONTRACTOR MUST FIELD-VERIFY ALL DIMENSIONS PRIOR TO FABRICATION OR CONSTRUCTION. WRITTEN DIMENSIONS SHALL GOVERN OVER SCALED DRAWINGS.
 - ANY DISCREPANCIES, ERRORS, OR OMISSIONS SHALL BE REPORTED TO THE ENGINEER IN WRITING WITHIN 10 DAYS OF PLAN RECEIPT AND PRIOR TO CONSTRUCTION.
 - CONTRACTOR SHALL PROVIDE ALL REQUIRED TEMPORARY SHORING, BRACING, AND SAFETY MEASURES DURING CONSTRUCTION.
 - CONTRACTOR SHALL PROTECT EXISTING STRUCTURES, UTILITIES, AND LANDSCAPING OUTSIDE THE SCOPE OF THIS PROJECT.
 - INSTALLATION PRACTICES MUST COMPLY WITH MANUFACTURER RECOMMENDATIONS, INCLUDING FLASHING AND WATERPROOFING DETAILS.
 - ALL UNDERGROUND UTILITIES SHALL BE LOCATED AND PROTECTED PRIOR TO EXCAVATION.
 - SHOP DRAWINGS AND MATERIAL CERTIFICATIONS SHALL BE PROVIDED UPON REQUEST.
 - CONTRACTOR SHALL MAINTAIN RECORDS OF INSPECTIONS AND TESTING.
 - FASTER TORQUE AND EMBEDMENT TESTING RESULTS SHALL BE PROVIDED IF REQUESTED.
4. MATERIALS
- FOUNDATION
- ASSUMED SOIL BEARING CAPACITY: 2,000 PSF (VERIFY IN FIELD).
 - NOTIFY ENGINEER IF UNSUITABLE SOILS ARE ENCOUNTERED.
 - APPLY TERMITTE TREATMENT AS REQUIRED BY FBC.
 - PLACE CONCRETE OVER VAPOR BARRIER WHERE APPLICABLE.
- CONCRETE
- MINIMUM COMPRESSIVE STRENGTH: 3,000 PSI @ 28 DAYS.
 - PORTLAND CEMENT: ASTM C150, TYPE I.



- AGGREGATE: 3/4" MAXIMUM, ASTM C33.
 - AIR ENTRAINMENT: 4-7%, ASTM C260.
 - WATER-REDUCING AGENT: ASTM C494.
 - WATER: CLEAN, POTABLE.
 - MINIMUM FINISH: 1/4" THICKNESS, 4 INCHES.
 - CURE CONCRETE FOR A MINIMUM OF 7 DAYS.
- STEEL REINFORCEMENT
- REINFORCING STEEL: ASTM A615, GRADE 60.
 - MINIMUM COVER FOR FOOTINGS: 2 INCHES.
 - LAP SPLICES: 40 TIMES BAR DIAMETER.
 - WELDED WIRE MESH PER ASTM A185.
 - FIBERMESH MAY BE SUBSTITUTED IF ASTM AND ACI REQUIREMENTS ARE MET.
- ALUMINUM
- STRUCTURAL ALUMINUM ALLOY: 6005-T5 MINIMUM.
 - DESIGN PER AA ADM-2020 SPECIFICATIONS.
 - MINIMUM WALL THICKNESS FOR EXTRUDED MEMBERS: 0.040 INCHES.
 - SELF-MATING BEAMS TO BE STITCHED WITH #12 SMS SCREWS:
 - 6" O.C. AT ENDS.
 - 18" O.C. ALONG SPANS.
 - KICK PLATES (FORMED PANELS) MINIMUM THICKNESS: 0.024 INCHES.
 - BOX RAILS: 1/2" MESH SCREEN IS STANDARD UNLESS OTHERWISE APPROVED.
 - ALL ALUMINUM IN CONTACT WITH STEEL OR PRESSURE-TREATED LUMBER SHALL HAVE DIELECTRIC ISOLATION.
 - ALUMINUM ROOF SYSTEMS SHALL BE SELECTED PER MANUFACTURER SPAN TABLES CERTIFIED BY A LICENSED FLORIDA ENGINEER.
 - METAL STRUCTURES WITHIN 5 FEET OF POOLS SHALL BE BONDED PER NEC 680.26.

ALUMINUM EXTRUSION DIMENSIONS	
HOLLOW SECTIONS	
2 x 2	2" x 2" x 0.060"
2 x 3	2" x 3" x 0.060"
OPEN-BACK SECTIONS	
1 x 2	1" x 2" x 0.044"
SELF-MATING SECTIONS (SMB)	
2 x 4	2" x 4" x 0.044" x 0.100"
2 x 5CL	2" x 5" x 0.050" x 0.135"
2 x 6	2" x 6" x 0.050" x 0.120"
2 x 7	2" x 7" x 0.057" x 0.120"
2 x 8	2" x 8" x 0.072" x 0.224"
2 x 9	2" x 9" x 0.072" x 0.224"
RECTIGLE - 6005-T5 MIN.	
2 x 10	2" x 10" x 0.092" x 0.374"
2 x 8	2" x 8" x 0.125" x 0.125"

FASTENERS

- ALL FASTENERS SHALL COMPLY WITH ASTM A193 FOR ZINC COATING.
- CONCRETE SCREWS: TAPCON, SIMPSON, HILTI, REDHEAD, OR APPROVED EQUAL.
- LAG BOLTS SHALL HAVE MINIMUM EMBEDMENT OF 8 TIMES BOLT DIAMETER.
- ALL BOLTS SHALL BE 6061-T6 (OR 6063-T6) SHALL BE USED FOR CONNECTIONS TO PRESSURE-TREATED WOOD.
- MINIMUM FASTENER SPACING
- SMS: 3/4" CENTER-TO-CENTER, 1/2" EDGE DISTANCE.
- 1X2 MEMBERS TO MASONRY: 1/4" X 2-3/4" TAPSCREWS @ 18" O.C.
- 1X2 MEMBERS TO WOOD: #14 X 2-3/4" WOOD SCREWS @ 18" O.C.
- 1X2 MEMBERS TO ALUMINUM: #10 X 1-1/2" SMS OR TEK SCREWS @ 18" O.C.
- FOR "OPEN VIEW" OR PICTURE WINDOW ASSEMBLIES, REDUCE FASTENER SPACING TO 12" O.C.

5. ELECTRICAL

- ALL UTILITIES WITHIN 5 FEET OF SWIMMING POOLS MUST BE BONDED IN ACCORDANCE WITH NEC 680.26.
- PROVIDE EQUIPOTENTIAL BONDING FOR ALL CONDUCTIVE ELEMENTS WITHIN POOL AREA.
- ALL ELECTRICAL WORK SHALL COMPLY WITH NEC 2023 EDITION AND LOCAL AMENDMENTS.


6. GENERAL REQUIREMENTS

- DIMENSIONS ARE NOMINAL UNLESS OTHERWISE NOTED.
- DIMENSIONAL TOLERANCES: ±1/8" UNLESS SPECIFIED.
- NOTES APPLY TO THE ENTIRE DRAWING SET UNLESS OTHERWISE INDICATED.
- REPORT ANY CONFLICTS IN DRAWINGS TO THE ENGINEER IMMEDIATELY.
- ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.
- ENSURE SITE ACCESS FOR REQUIRED INSPECTIONS.
- FINAL CLEANUP IS REQUIRED PRIOR TO PROJECT CLOSEOUT.

MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES
APPROVED
BLD2604-1083 4/15/2026
REVIEWED
1 INITIAL DESIGN
2 DESCRIPTION
3 JDCV AL
4 DRAWN REVIEWED
5 BC
6 DATE
7 4/3/2026




Zoning Review
Kayla Roberson
Approved -
4/15/2026

NOTICE:
THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS
OF ACTIVE DESIGN LLC. ANY PARTY ACCEPTING THIS DOCUMENT
DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE
DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS
WITHOUT THE CONSENT OF ACTIVE DESIGN LLC.
CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY
ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS
SHOWN ON DRAWINGS BEFORE PROCEEDING WITH ANY
CONSTRUCTION.






Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 4/3/2026 SHEET: 1
DRAWING TITLE: NOTES
PROJECT NAME: FIGHERA, JOSEPH

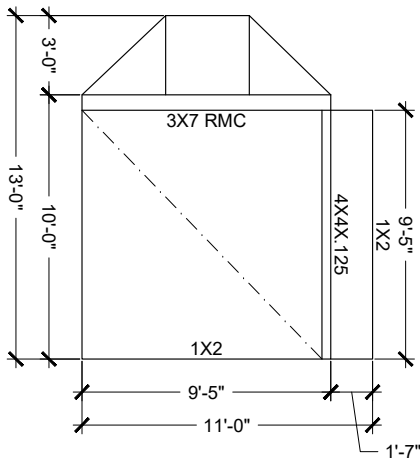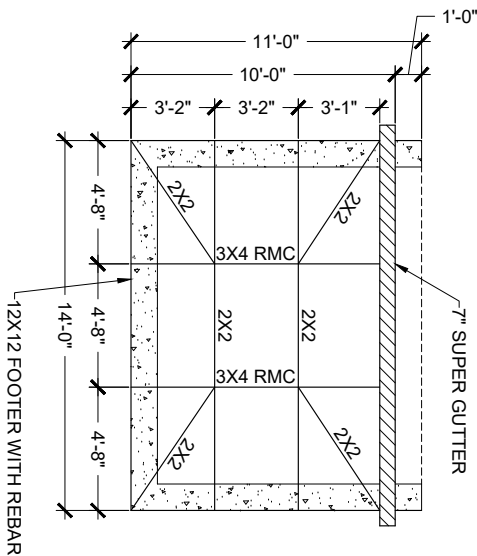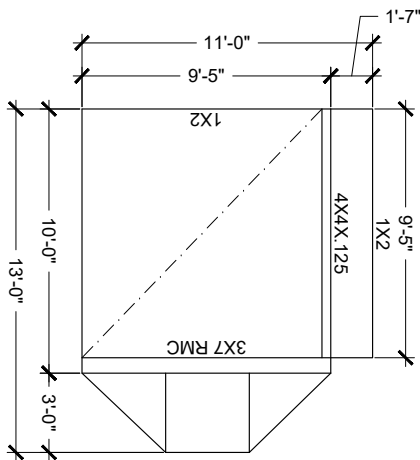


LEGEND:
--- Indicated cable bracing. See details on sheet 3.

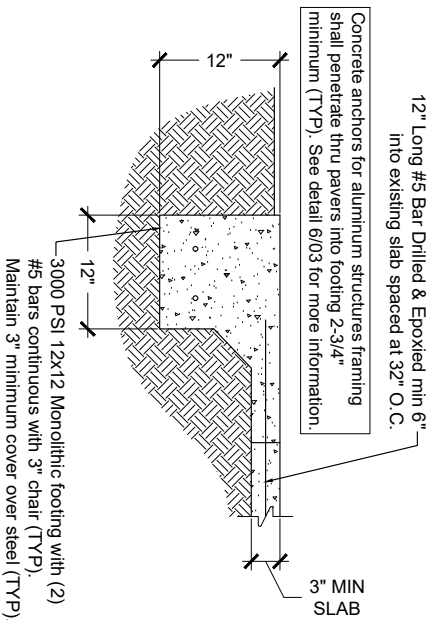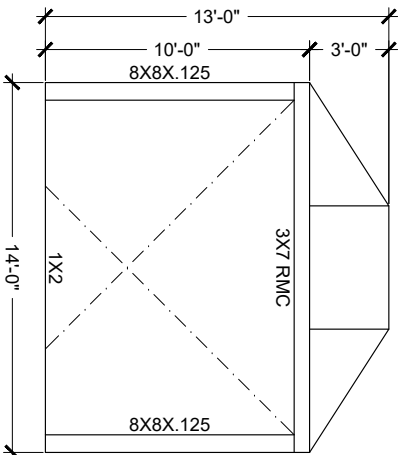

MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES
APPROVED
BLD2604-1083 4/15/2026
REVIEWED FOR CODE COMPLIANCE
This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. The approval of these documents does not grant authority to violate any current Local, State or Federal codes.


REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDCV	AL	BC	4/3/2026

NOTICE:
THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.
CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.




Active Design LLC
info@activedesigneng.com
(310) 963-4514


DATE:	SHEET:
4/3/2026	2
DRAWING TITLE:	STRUCTURAL DESIGN
PROJECT NAME:	FIGHERA, JOSEPH




Cable to Frame Connector
SCALE: 3" = 1'-0"

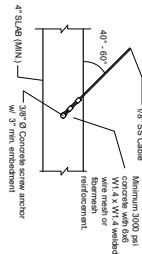

Cable to Foundation Connection
SCALE: 3" = 1'-0"

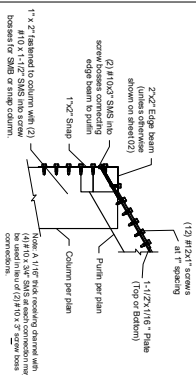


Sloped Purlin to Column Connector
SCALE: 1 1/2" = 1'-0"

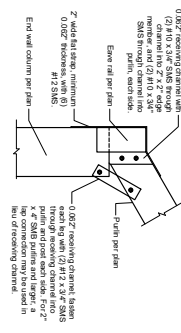


Roof Brace Connection
SCALE: 3" = 1'-0"



BEAM	QTY SIZE SMSS/IDE
2X4	4 - #10
2X5	4 - #10
2X6	4 - #10
2X7	6 - #10
2X8	6 - #10
2X9	6 - #10
2X10	6 - #10
3X4	4 - #10
3X5	4 - #10
3X6	4 - #10
3X7	6 - #10
3X8	6 - #10
3X9	6 - #10
3X10	6 - #10
4X10	6 - #10

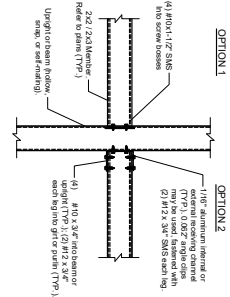

Beam/Post to Girt/Purlin Connection

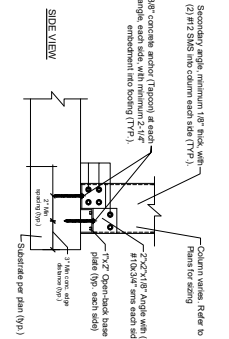


SCALE: 3" = 1'-0"

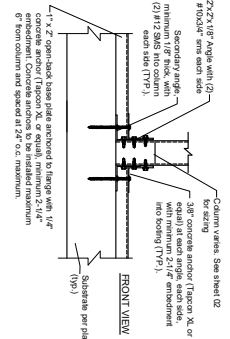


Gusset Connection
SCALE: 2" = 1'-0"

BEAM SIZE		QUANTITY OF #12 SMS PER BEAM FACE/SIDE/TOTAL FOR CONNECTION.	QUANTITY OF #14 SMS PER BEAM FACE/SIDE/TOTAL FOR CONNECTION.
2X4 SMB	9/18/36		
2X6 SMB	9/18/36		
2X6 SMB	9/18/36		
2X7 SMB	10/20/40		
2X8 SMB	10/20/40	12/24/48	
2X9 SMB		12/24/48	
2X10 SMB		12/24/48	
3X4 RMC	9/18/36	132/65/5	
3X4 RMC	9/18/36		
3X6 RMC	9/18/36		
3X7 RMC	10/20/40		
3X8 RMC		12/24/48	
3X8 RMC		12/24/48	
3X10 RMC		132/65/5	
3X11 RMC		132/65/5	
4X10 RMC			

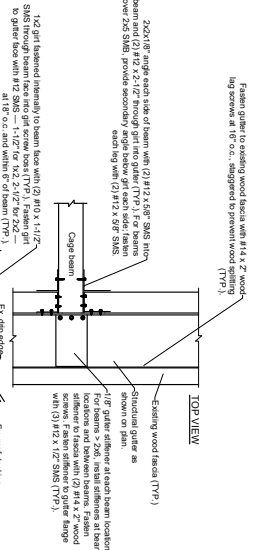

SCALE: 3" = 1'-0"

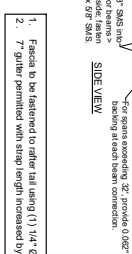




NOTE: 3/16" 6005-T5 gusset, fitted within SMB with tight tolerance to prevent self-position along top and bottom beam edges. Maintain minimum fastener spacing of 1-1/8" (shop) and 1-1/4" (field). Edge distance: min. 1/2". Stagger fasteners as needed per adjusted fastener table. Internal pull/screws count toward gusset connectors. Pattern applies to A-frame configurations.

NOTICE: THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFORMANCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.






Active Design LLC
info@activedesignny.com
(310) 963-4514

DATE:	4/3/2026	SHEET:
DRAWING TITLE:	DETAILS 1	
PROJECT NAME:	FIGHERA, JOSEPH	

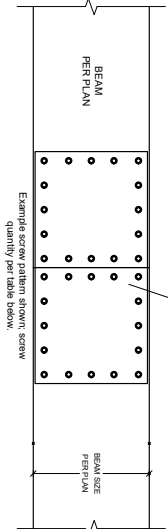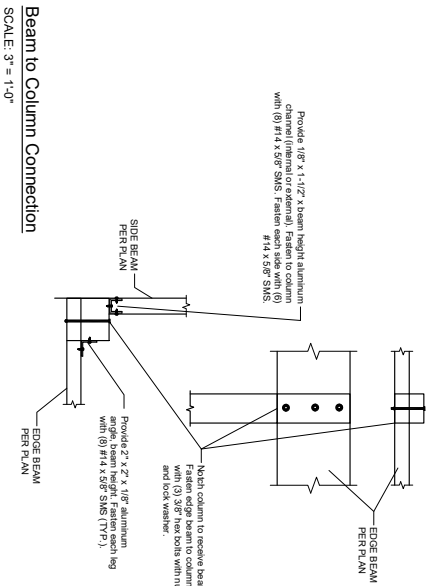

FASTENER QUANTITY TABLE			
BEAM SIZE	FASTENER SIZE	QTY PER FACE/END/JOINT	
2x4 SMB	#12	6 / 12 / 24	
2x6 SMB	#12	6 / 12 / 24	
2x8 SMB	#12	10 / 20 / 40	
2x7 SMB	#12	12 / 24 / 48	
2x8 SMB	#14	12 / 24 / 48	
2x9 SMB	#14	18 / 36 / 72	
2x10 SMB	#14	18 / 36 / 72	
3x4 RMC	#12	6 / 12 / 24	
3x5 RMC	#12	6 / 12 / 24	
3x6 RMC	#12	10 / 20 / 40	
3x7 RMC	#12	12 / 24 / 48	
3x8 RMC	#14	12 / 24 / 48	
3x9 RMC	#14	18 / 36 / 72	
3x10 RMC	#14	18 / 36 / 72	
3x11 RMC	#14	18 / 36 / 72	
4x10 RMC	#14	18 / 36 / 72	

Beam Splice Detail

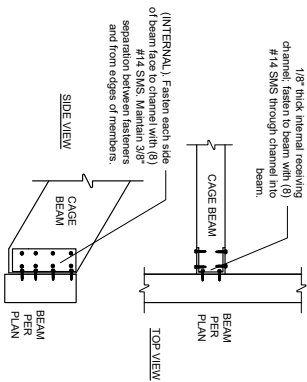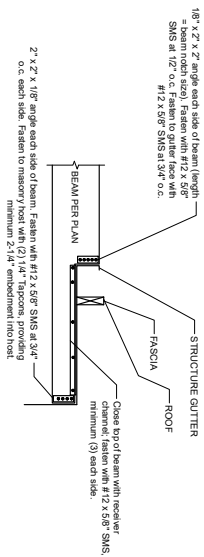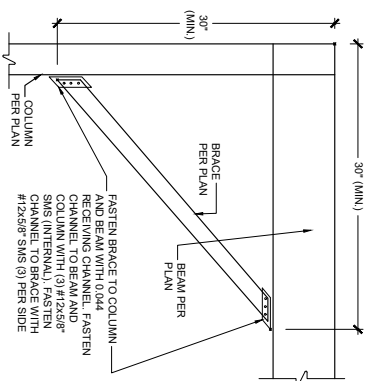

Beam Under Overhang Detail

Beam to Edge Beam Detail









NOTICE

THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.

CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.

Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE:	4/3/2026	SHEET:
DRAWING TITLE:		
DETAILS CONT.		
PROJECT NAME:		
FIGHERA, JOSEPH		

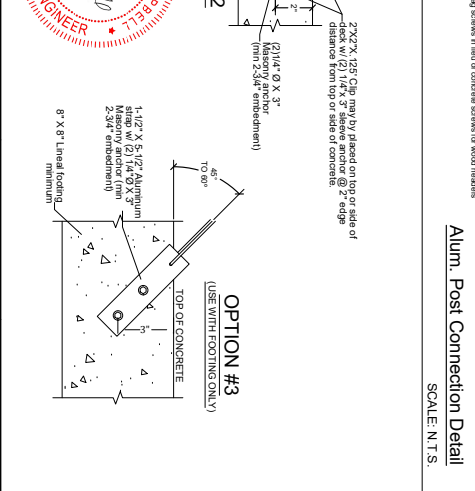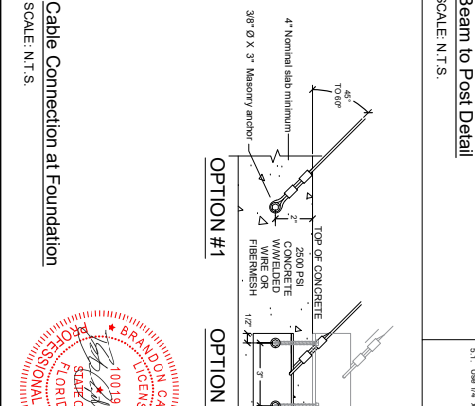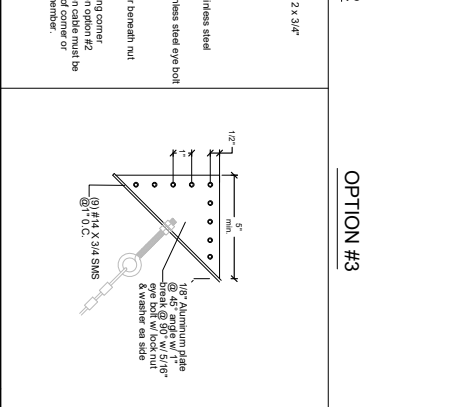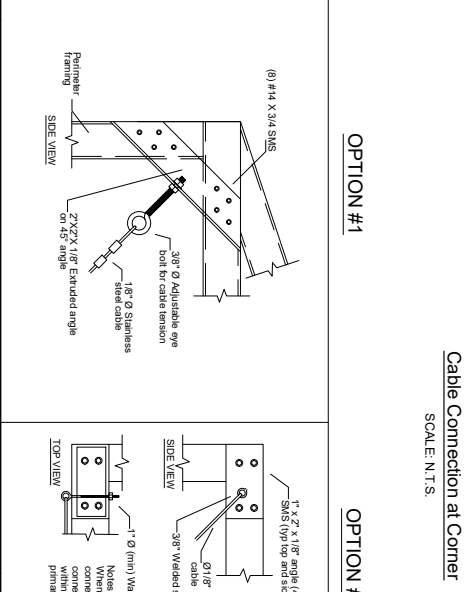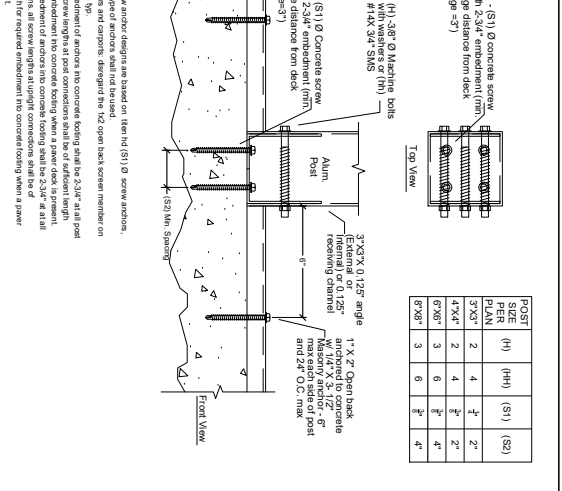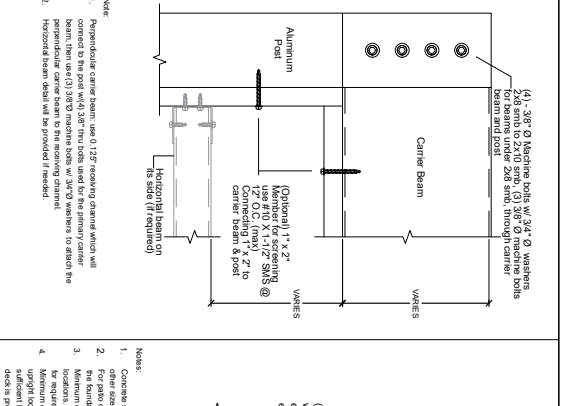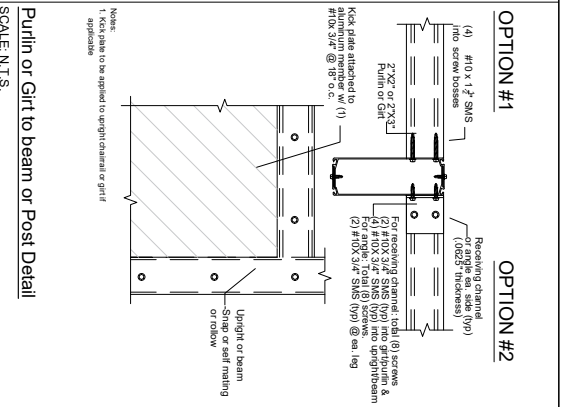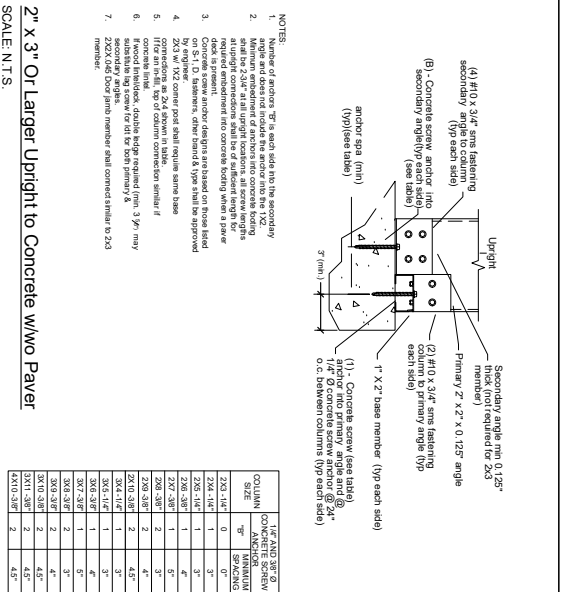

MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES
APPROVED
BLD2604-1083 4/15/2026
REVIEWED FOR CODE COMPLIANCE
This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. The approval of these documents does not grant authority to violate any current Local, State or Federal codes.

REV	DESCRIPTION	DRAWN	REVIEWED	APPR.	DATE
1	INITIAL DESIGN	JDCV	AL	BC	4/3/2026

NOTICE:
THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.
CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.




Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE: 4/3/2026
DRAWING TITLE: DETAILS CONT.
PROJECT NAME: FIGHERA, JOSEPH


DATE: 4/3/2026
SHEET: 5

MANATEE COUNTY BUILDING & DEVELOPMENT SERVICES APPROVED		Redacted
BLD2604-1083	4/15/2020	Redacted
REVIEWED FOR CODE COMPLIANCE This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. The approval of these documents shall not grant authority to violate any current Local, State or Federal code.		

REVISIONS	1	INITIAL DESIGN REVIEW	JDGV	AL	BC	4/3/2026	NOTICE: THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGN LLC. ANY PART OR PORTION OF THIS DOCUMENT IS UNLAWFULLY COPIED, REPRODUCED, OR OTHERWISE Duplicated IN WHOLE OR PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGN LLC. CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY OWNER IMMEDIATELY IN WRITING OF ANY DISCREPANCIES SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.		Active Design LLC info@activedesigneng.com (310) 963-4514	DATE:	4/3/2026	SHEET:	6
										DRAWING TITLE:	DETAILS CONT.		
											PROJECT NAME:	FIGHERA, JOSEPH	

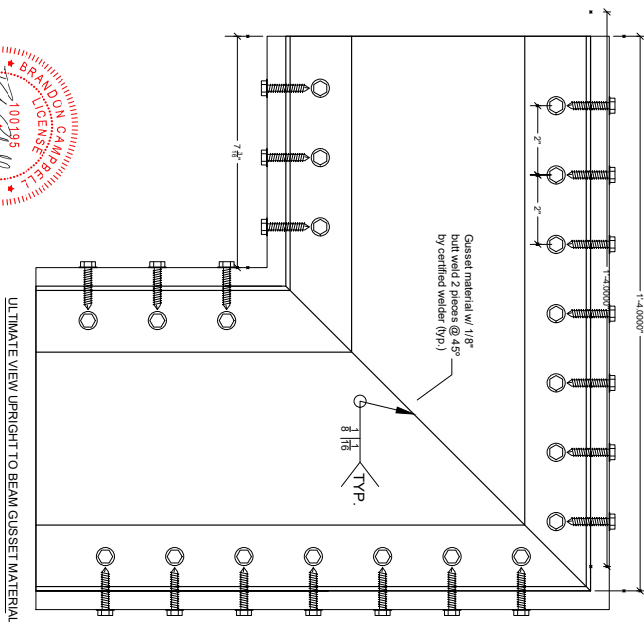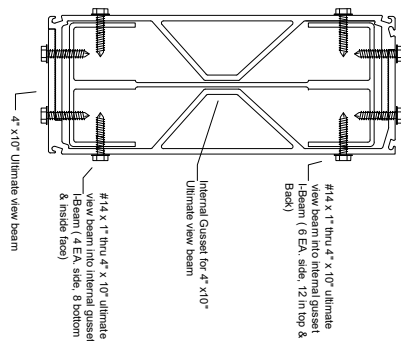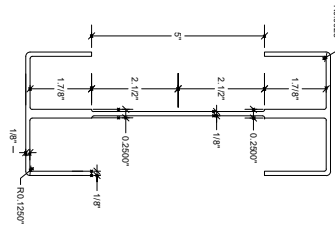

4" x 10" x .125" bottom plate welded to gusset material by certified welder.

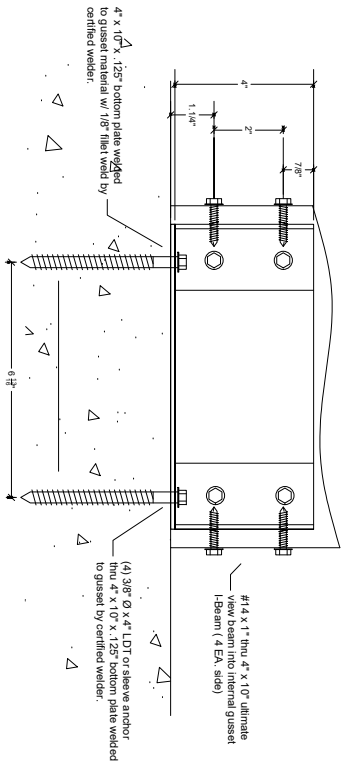


ULTIMATE VIEW BASE MATERIAL

- Horizontal splice shall be done similar to corner splice w/ 24" beam insert w/ (5) #14 x1" SMS EA, section as shown above.
- Angular splice shall also be done similar as above.
- Beam continuation use base plate on back side of post & attach with (4) #16x2" SMS.


Note:



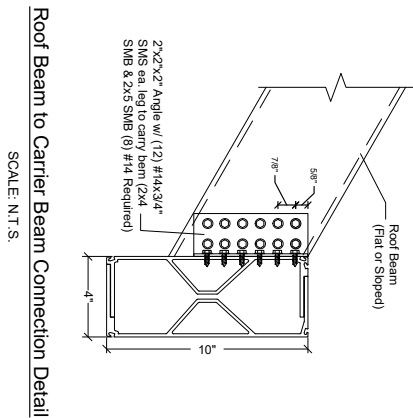


Roof Beam to Carrier Beam Connection Detail

SCALE: N.T.S.

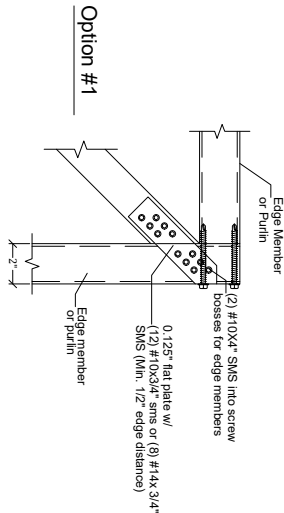

Option #1


Both ends similar

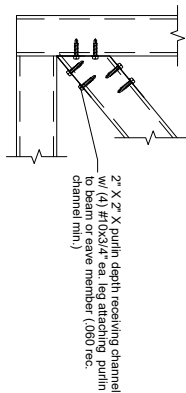

Option #2

Roof Bracing Connection Detail

SCALE: N.T.S.

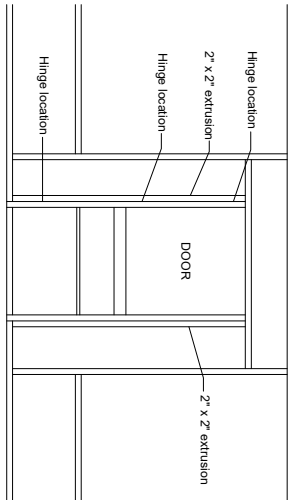

Typical Screen Door Connection Detail

SCALE: N.T.S.

- Notes:
1. Hinges shall be attached to structure w/ (3) #10 x 5/8" SMS minimum.
 2. Door shall be attached to enclosure w/(2) hinges minimum.
 3. Hinges shall be attached to door with (3)#10 x 5/8" SMS, fasten a 1" x 2" x 0.044" to upright w/#12 x 1" SMS @ 12" O.C. and within 3" from end of the upright(if applicable).

Roof Bracing Connection Detail

SCALE: N.T.S.



NOTICE:
THE DATA IN THIS DOCUMENT INCORPORATES PROPRIETARY RIGHTS OF ACTIVE DESIGNS LLC. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR PART NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF ACTIVE DESIGNS LLC.
CONTRACTOR SHALL VERIFY ALL CONDITIONS ON JOB SITE & NOTIFY ENGINEER OF RECORD OF ANY VARIATIONS FROM DIMENSIONS SHOWN ON THESE DRAWINGS BEFORE PROCEEDING WITH ANY CONSTRUCTION.



Active Design LLC
info@activedesigneng.com
(310) 963-4514

DATE:	4/3/2026	SHEET:	7
DRAWING TITLE:	DETAILS CONT.		
PROJECT NAME:	FIGHERA, JOSEPH		

MANATEE COUNTY
BUILDING & DEVELOPMENT SERVICES
APPROVED
BLD2604-1083
4/15/2026
REV
INITIAL DESIGN
REVIEWED FOR CODE COMPLIANCE
This set of plans must be kept on the job site at all times. It is unlawful to make changes without written approval from Manatee County Building & Development Services. The approval of these documents does not grant authority to violate any current Local, State or Federal codes.

